



Sources and Control of Volatile Organic Air Pollutants

APTI Course 482

Student Workbook



March, 2025

By: William Franek; Ph.D., P.E., DEE & Louis DeRose; J.D., M.S., P.E.

Course 482
Sources and Control of Volatile Organic Air Pollutants

March 24 – 28, 2025

AGENDA

LOCATION
On-Line (CenSARA)

MODERATOR
William J. Franek; Ph.D., P.E., DEE

DAY & TIME	SUBJECT	SPEAKER
-----------------------	----------------	----------------

Monday, March 24 (Central Time)

9:00	Course Overview	W. Franek
9:15	Properties and Fundamentals	W. Franek
11:00	BREAK	
11:15	Properties and Fundamentals (cont'd)	W. Franek
12:15	Properties of Organic Vapors	L. DeRose
1:15	ADJOURN	

Tuesday, March 25

9:00	Source Measurement Techniques	W. Franek
10:15	National Sources and the Regulatory Approach	L. DeRose
11:00	BREAK	
11:15	National Sources and the Regulatory Approach (cont'd)	L. DeRose
12:15	Surface Coating	W. Franek
1:15	ADJOURN	

Wednesday, March 26

9:00	Surface Coating (cont'd)	W. Franek
9:15	Graphic Arts	W. Franek
10:45	Calculating VOC Content of Coatings and Inks	W. Franek
11:00	BREAK	
11:15	Calculating VOC Content of Coatings and Inks (cont'd)	W. Franek
1:00	Petroleum Refining	W. Franek
1:15	ADJOURN	

Thursday, March 27

9:00	Petroleum Refining	W. Franek
9:45	Petroleum Product Storage and Distribution	L. DeRose
11:00	BREAK	
11:15	Petroleum Product Storage and Distribution (Cont.)	L. DeRose
12:15	Degreasing & Drycleaning	W. Franek
1:30	ADJOURN	

DAY & TIME	SUBJECT	SPEAKER
------------	---------	---------

Friday, March 28

9:00	Batch Process VOM/HAP Calculations for Chemical Mfg.	W. Franek
10:30	Intro to VOC Control Technology	L. DeRose
11:00	BREAK	
11:15	Intro to VOC Control Technology (cont.)	DeRose & Franek
1:30	ADJOURN	

William J. Franek; Ph.D., P.E., DEE
William Franek, LLC
6807 West 64th Place
Chicago, IL 60638
312 -919-0341
Email-: billfranek@gmail.com

Louis DeRose; J.D., M.S., P.E.
Attorney at Law
221 Orchard Lane
Glen Ellyn, Illinois 60137
E-mail: loudrose@yahoo.com

APTI Course 482

Sources and Control of Volatile Organic Air Pollutants

1 - 1



Volatile Organic Compound (VOC)

“...any compound of carbon, excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate, which participates in atmospheric photochemical reactions. This includes any such organic compound other than the following, which have been determined to have negligible photochemical reactivity...”

---40CFR51.100

1 - 3

Course Objective

- Provide information on sources of VOCs and techniques for controlling their emission
- Focus is on reduction of VOCs for attaining or maintaining ozone NAAQS

1 - 4

Course Topics

Topic	Chapter
Properties and Fundamentals	2
Source Measurement Techniques	3
National Sources and the Regulatory Approach	4
Surface Coating	5
Graphic Arts	6
Calculating the VOC Content of Paints and Inks	7

1 - 5

Course Topics

Topic	Chapter
Batch Process VOM/HAP Calculation for Chemical Mfg. Industry	7B
Petroleum Refining	8
Petroleum Product Storage and Distribution	9
Degreasing	10
Dry Cleaning	11
Introduction to Control Technology	13

1 - 6

Chapter 2
 Sources and Control of Volatile
 Organic Air Pollutants

"Properties and Fundamentals"

2 - 1

**Importance of Organic Compounds
 (in Air Pollution Reactants)**


- Volatile compounds contribute to the formation of ozone and photochemical oxidants
- Compounds can have toxic effects on plants and animals

2 - 2

Topics Covered

- Review of organic chemistry
- Formation of ozone and photochemical smog
- Properties of organic vapors

2 - 3

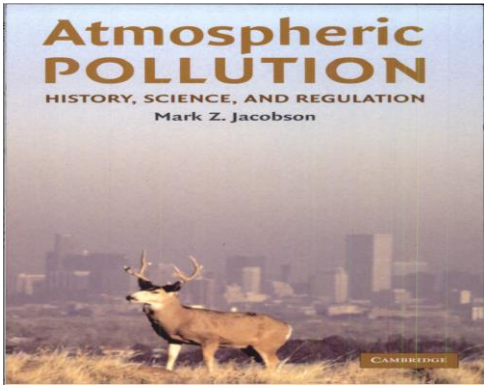

2 - 4

Review of Organic Chemistry

- Chemistry of the compounds of carbon
- Number of organic compounds exceeds 10 million
- Number of inorganic compounds is about 300,000


2 - 5

Characteristics of the Carbon Atom

- Atomic number = 6
- Atomic weight = 12
- Total electrons = 6
- Valence electrons = 4
- Forms covalent bonds
 - Single
 - Double
 - Triple

2 - 6

Lewis Formula Covalent Bonds
Diagrams

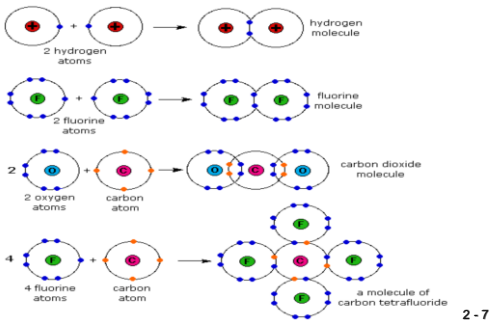

Structural Formulas Table


Common Name	Molecular Formula	Lewis Formula	Kekulé Formula
Methane	CH ₄		
Ammonia	NH ₃		
Ethane	C ₂ H ₆		
Methyl Alcohol	CH ₄ O		
Ethylene	C ₂ H ₄		
Formaldehyde	CH ₂ O		
Acetylene	C ₂ H ₂		
Hydrogen Cyanide	CHN		

2 - 8

Molecular, Structural and Semi-Structural
Formulas

Molecular Formula	Structural Formula	Semi-structural Formula
C ₂ H ₆		CH ₃ —CH ₃

Chemical Structure Represented Three Different Ways

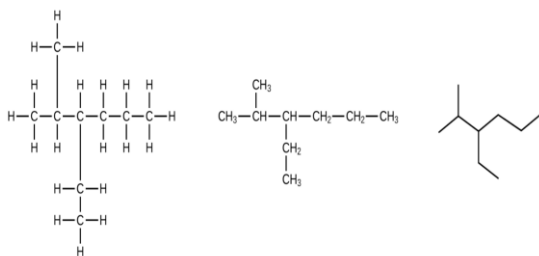

Expanded formula

Condensed formula

Skeletal structure

2 - 10

Hydrocarbons

Compounds formed only from carbon
and hydrogen

- Alkanes
- Alkenes
- Alkynes
- Cyclic compounds

2 - 11

Alkanes

Carbon atoms linked only by single
bonds

General formula: $\text{C}_n\text{H}_{2n+2}$

Methane (CH_4)
Ethane (C_2H_6)
Propane (C_3H_8)
Butane (C_4H_{10})
Pentane (C_5H_{12})


2 - 12

Properties of Some Alkanes

Alkane	Molecular Formula	Melting Point (°C)	Boiling Point (°C)	Phase at STP	Number of Structural Isomers
methane	CH ₄	-182.5	-161.5	gas	1
ethane	C ₂ H ₆	-183.3	-88.6	gas	1
propane	C ₃ H ₈	-187.7	-42.1	gas	1
butane	C ₄ H ₁₀	-138.3	-0.5	gas	2
pentane	C ₅ H ₁₂	-129.7	36.1	liquid	3
hexane	C ₆ H ₁₄	-95.3	68.7	liquid	5
heptane	C ₇ H ₁₆	-90.6	98.4	liquid	9
octane	C ₈ H ₁₈	-56.8	125.7	liquid	18
nonane	C ₉ H ₂₀	-53.6	150.8	liquid	35
decane	C ₁₀ H ₂₂	-29.7	174.0	liquid	75
tetradecane	C ₁₄ H ₃₀	5.9	253.5	solid	1058
octadecane	C ₁₈ H ₃₈	28.2	316.1	solid	60,512

2 - 13

Isomers of Butane

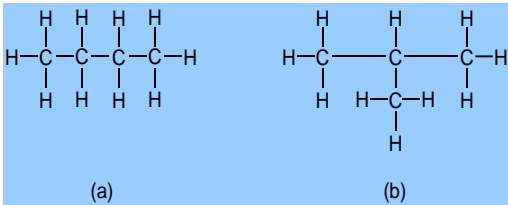

2 - 14

Isomers

- Compounds with the same molecular formulas, but with different structures
- All alkanes with four or more carbon atoms exist as isomers
- Alkanes with five or more carbon atoms exist as more than two isomers


2 - 15

2. 16

2 - 17

2 - 18


3-D Structure for 1,3-
 Butadiene

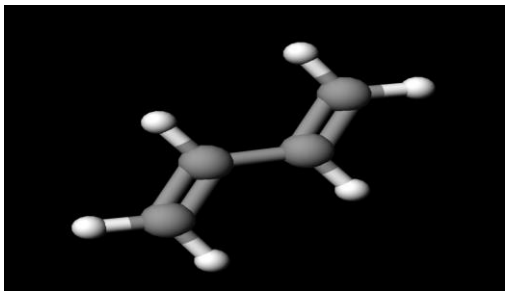

<https://webbook.nist.gov/chemistry/name-ser/>

2 - 19

Butylene Isomers

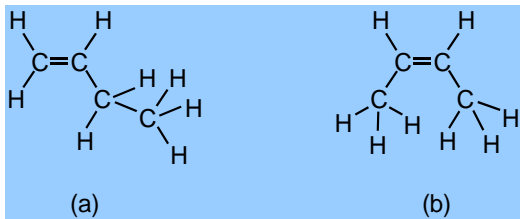

(a)

(b)

2 - 20

Alkynes

Hydrocarbons that contain one triple
 bond

General formula: C_nH_{2n-2}

- Ethyne (C_2H_2)
- Propyne (C_3H_4)
- Butyne (C_4H_6)
- Pentyne (C_5H_8)

2 - 21


Cyclic Compounds

- Cycloparaffins
- Aromatic hydrocarbons


[Unprecedented" Control – Scientists Twist Chemical Bonds Beyond Their Limits \(scitechdaily.com\)](#)

2 - 22


Examples of Cycloparaffin Compounds




Cyclopropane



Cyclobutane




Cyclopentane



Cyclohexane


2 - 23

Benzene Structure

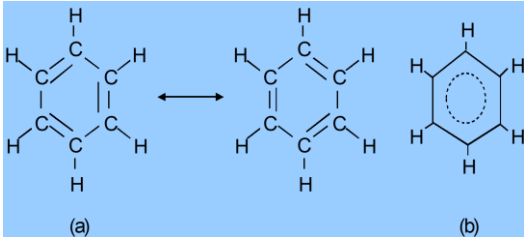

2 - 24


Compounds Derived from
 Benzene - (BTEX)

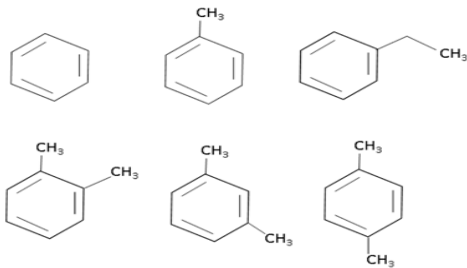

Chemical structure of BTEX. Upper line: benzene, toluene and ethylbenzene. Lower line: ortho-, meta- and para-xylene.



2 - 25

Biphenyl

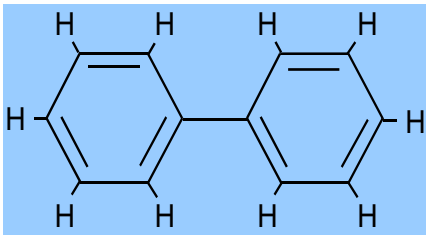

2 - 26

Benzo (α) pyrene



2 - 27

Nomenclature			
1 carbon	meth-	CH ₄	methane
2 carbons	eth-	C ₂ H ₆	ethane
3 carbons	prop-	C ₃ H ₈	propane
4 carbons	but-	C ₄ H ₁₀	butane
5 carbons	pent-	C ₅ H ₁₂	pentane
6 carbons	hex-	C ₆ H ₁₄	hexane
7 carbons	hep-	C ₇ H ₁₆	heptane
8 carbons	oct-	C ₈ H ₁₈	octane

2 - 28

Nomenclature			
1 carbon	meth-	CH ₄	methane
2 carbons	eth-	C ₂ H ₆	ethane
3 carbons	prop-	C ₃ H ₈	propane
4 carbons	but-	C ₄ H ₁₀	butane
5 carbons	pent-	C ₅ H ₁₂	pentane
6 carbons	hex-	C ₆ H ₁₄	hexane
7 carbons	hep-	C ₇ H ₁₆	heptane
8 carbons	oct-	C ₈ H ₁₈	octane
9 carbons	non-	C ₉ H ₂₀	nonane
10 carbons	Dec-	C ₁₀ H ₂₂	decane

2 - 29

Functional Groups	
Alcohols	-OH
Amines	-NH ₂
Mercaptans	-SH
Chlorides	-Cl

2 - 30

Location of Substitution

1,1,1-trichloroethane $C_2H_3Cl_3$

2-propylamine C_3H_9N

1,1,2,2 Tetrachloroethane $C_2H_2Cl_4$

Perchloroethylene C_2Cl_4
(1,1,2,2-tetrachloroethylene)

2 - 31

Functional Groups Containing Oxygen

Alcohols	Aldehydes	Ketones
$R-OH$	$R-\overset{\overset{O}{\parallel}}{C}-H$	$R_1-\overset{\overset{O}{\parallel}}{C}-R_2$
Esters	Acids	Ethers
$R-\overset{\overset{O}{\parallel}}{C}-O-R$	$R-\overset{\overset{O}{\parallel}}{C}-OH$	$R-O-R$

2 - 32

Functional Groups Containing Oxygen


Alcohols	Aldehydes	Ketones
$R-OH$	$R-\overset{\overset{O}{\parallel}}{C}-H$	$R_1-\overset{\overset{O}{\parallel}}{C}-R_2$
Esters	Acids	Ethers
$R-\overset{\overset{O}{\parallel}}{C}-O-R$	$R-\overset{\overset{O}{\parallel}}{C}-OH$	$R-O-R$


2 - 33


2.34


2 - 35

2 - 36

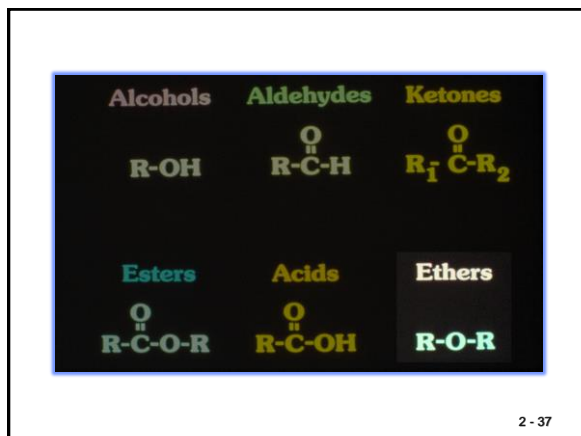

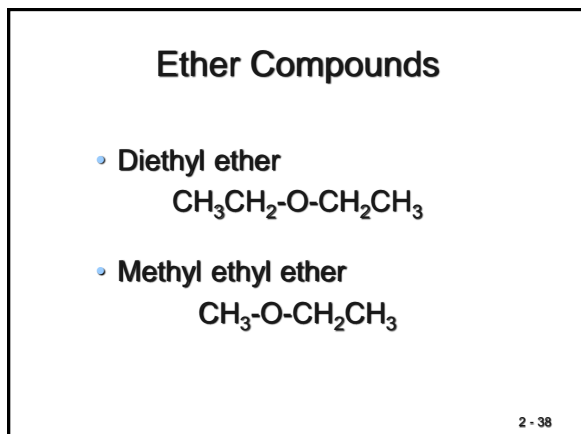


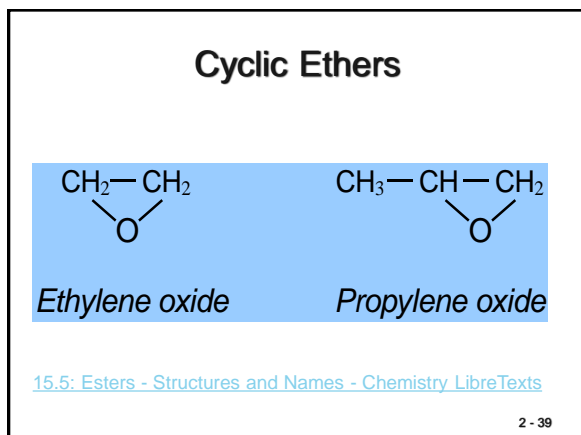

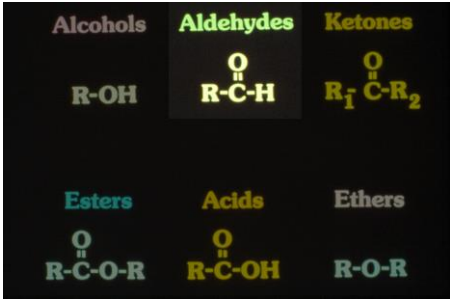


2 - 40

Aldehydes




2 - 41

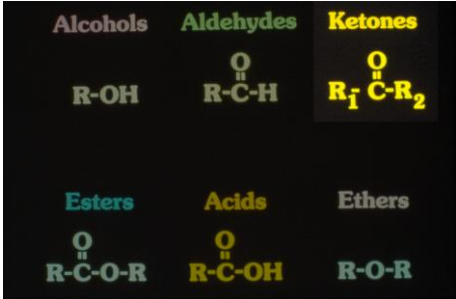


2 - 42

Ketones

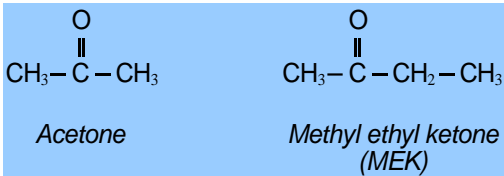


2 - 43

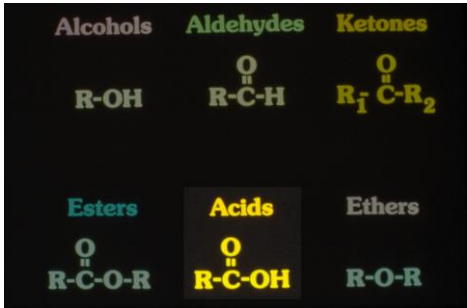


2 - 44

Acids

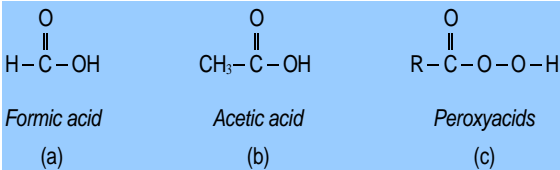


2 - 45

Acid Anhydrides

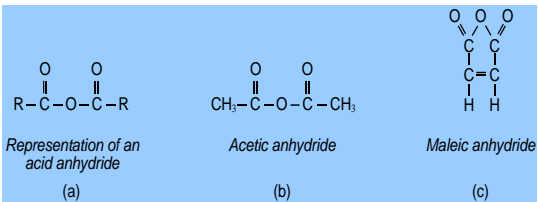


2 - 46

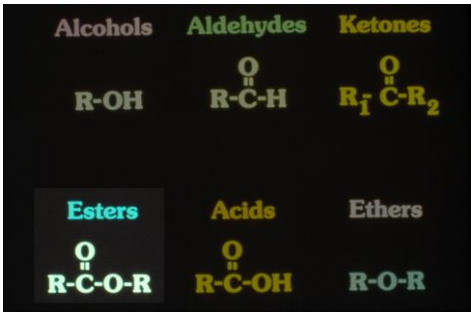


2 - 47

Ethyl Acetate

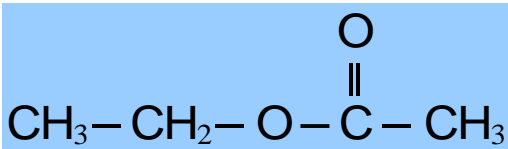


2 - 48

Organic Compounds With Multiple Functional Groups



capsaicin



vanillin

2 - 49

Organic Compounds Containing Halides

2 - 50

Organic Chlorides

Chlorides of methane and ethane



Methylene chloride



Chloroform



Carbon tetrachloride



Methyl chloroform (1,1,1 - trichloroethane)

2 - 51

(continued)

$$\begin{array}{c} \text{H} \quad \text{H} \\ | \quad | \\ \text{H}-\text{C}=\text{C}-\text{Cl} \end{array}$$


Perchloroethylene

2 - 52




(continued)

$$\begin{array}{ccccccc} & \text{H} & & \text{H} & & \text{H} & \\ & | & & | & & | & \\ \text{H} & - \text{C} = & \text{C} - & \text{C} - & \text{C} & & \\ & & & | & & & \\ & & & \text{H} & & & \end{array}$$
$$\begin{array}{ccccccc} & \text{H} & & \text{H} & & \text{Cl} & & \text{H} \\ & | & & | & & | & & | \\ \text{H} & - \text{C} & = & \text{C} & - & \text{C} & = & \text{C} - \text{H} \end{array}$$

Chloroprene

2 - 53

(continued)

Clc1ccccc1

Example of a polychlorinated biphenyl (PCB)

2 - 54

$$\begin{array}{c} \text{Cl} \\ | \\ \text{Cl}-\text{C}-\text{F} \\ | \\ \text{Cl} \end{array}$$

Trichlorofluormethane
(Freon 11)



Dichlorodifluoromethane
(Freon 12)




Trichlorotrifluoroethane
(Freon 13)

2 - 55

$$\begin{array}{c} \text{O} \\ \parallel \\ \text{Cl}-\text{C}-\text{Cl} \end{array}$$


Phosgene

(a)



Epichlorohydrin

(b)






Dioxin (TCDD)
2,3,7,8, tetrachlorodibenzo-p-dioxin
(c)

[PubChem \(nih.gov\)](https://pubchem.ncbi.nlm.nih.gov/)

2 - 56

Nitroparaffins



[NITROETHANE](#) | [CAMEO Chemicals](#) | [NOAA](#)

2-57

PAN and PBN Compounds

O

O

||

||

CH₃-C-O-N⁺-O⁻

Peroxyacetyl nitrate

O


O


||

||

C₆H₅-C-O-O-N⁺-O⁻

Peroxybenzoyl nitrate

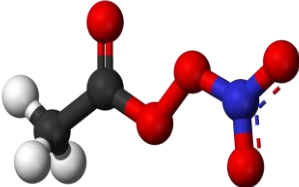




2 - 58

Smog Chamber

Figure 1. Eye irritation test is the primary method used in the Smog Chamber to evaluate contribution to photochemical smog.

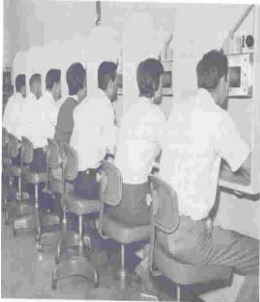

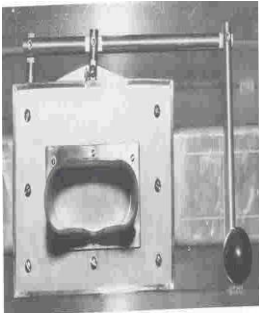


Figure 3. Smog Chamber eye port


2 - 59

Two Smog Researchers Use A Plastic Helmet And Suit:



2 - 60

Organic Compounds Containing Nitrogen



2 - 61

Amine Compounds

- Primary amine: RNH_2
 CH_3NH_2
- Secondary amine: R_2NH
 $CH_3NHC_2H_5$
- Tertiary amine: R_3N
 $(C_2H_5)_3N$

2 - 62

Organic Compounds Containing Sulfur

- Methyl mercaptan
 CH_3SH
- Dimethyl sulfide
 CH_3SCH_3

2 - 63



Formation of Ozone and Photochemical Smog

2 - 64

Smog in Los Angeles, California






Photochemical Reactions



Wavelengths of interest are 280 nm to 730 nm





2 - 66

Reactions of Acetaldehyde (cont'd)








76

Reactions of Acetaldehyde (cont'd)



2 - 77

Reactions of Hydrocarbons



2 - 78

Variables Affecting Intensity

- Latitude
- Time of day
- Time of year
- Presence of clouds or aerosols

Summer maximum = 2 x 10¹⁶ photons cm⁻²sec⁻¹
for 4-6 hours
Winter values = 0.7-1.5 x 10¹⁶ photons cm⁻²sec⁻¹
for 2-4 hours


2 - 67

Energy Absorbing Molecules


- NO₂
- O₃
- H₂O₂
- HNO₂
- Aldehydes
- Ketones

2 - 68

Basic Photochemical Cycle



2 - 69

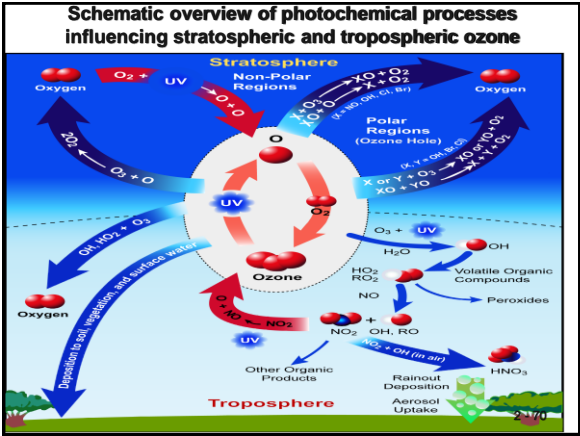

Role of VOCs

$$O_3 \xrightarrow{h\nu} O^* + O_2$$
$$O^* + H_2O \rightarrow 2OH\cdot$$

Understanding OH· reactions is key

2 - 71

Reactions of Formaldehyde

Photolysis:



$$HCHO \xrightarrow{h\nu} H\cdot + HCO\cdot$$

Reaction with OH:

$$HCHO + OH\cdot \rightarrow HCO\cdot + H_2O$$



2 - 72

Reactions of Formaldehyde (cont'd)



2 - 73


Reactions of Formaldehyde (cont'd)




2 - 74

Reactions of Acetaldehyde

Photolysis:







Reaction with OH:



2 - 75

Summary



2 - 79

- $\text{Photo-chemical Reactive Organics} \xrightarrow{h\nu} \text{Hydrocarbon \& Organic Radicals}$
- $\text{Hydrocarbon \& Organic Radicals} + \text{OH} \rightarrow \text{Hydrocarbon \& Organic Radical}$
- $\text{Hydrocarbon \& Organic Radicals} + \text{O}_2 \rightarrow \text{Peroxy radicals}$
- $\text{Peroxy radicals} + \text{NO} \rightarrow \text{NO}_2 + \text{Organic Radicals}$
- $\text{Peroxy radicals} + \text{NO}_2 \rightarrow \text{PAN \& PBN}$

2 - 80

Properties of Organic Vapors

- Gas and vapor definitions
- Molecular weight and the mole
- Equation of state
- Vapor pressure
- Partial pressure and partial volume
- Concentration expressions
- Explosive limits

84

Gas and Vapor Definitions

- The **critical temperature** is the highest temperature at which a pure component liquid and vapor can exist in equilibrium.
- A gaseous material below its critical temperature is a **vapor**. (Compressing a vapor at constant temperature will cause it to condense.)
- A gaseous material above its critical temperature is a **gas**. (Compressing a gas at constant temperature will not cause it to condense).

85

The Mole

A mole is a mass of material that contains a certain number of molecules. It is numerically equal to the molecular weight.



*The mass of one **mole** of a substance is equal to that substance's **molecular weight**.* For example, oxygen (O₂) has an atomic weight of 16 with 2 atoms of oxygen (O₂) in the molecule. Therefore, the molecular weight of O₂ is (16 x 2) = 32, and as a result there are 32 grams per gram-mole, 32 kilograms per kilogram-mole, and 32 pounds per-pound mole (of oxygen).

86

Molecular Weight

Molecular weight is the sum of the *atomic weights* of all atoms in a molecule

Mixtures of molecules do not have a true molecular weight; however, they do have an apparent molecular weight that can be calculated from the composition of the mixture:

$$MW_{\text{mixture}} = \sum_{i=1}^n \chi_i MW_i$$

χ_i = mole fraction of component i

MW_i = molecular weight of component i

87

Example

Calculate the average molecular weight of air at EPA standard conditions. Consider air to be composed of 21 mole% oxygen and 79 mole% nitrogen.

$$MW_{\text{mixture}} = \sum_{i=1}^n \chi_i MW_i$$

$$MW_{\text{air}} = 0.21 \left(32 \frac{\text{g}}{\text{mole}} \right) + 0.79 (28 \frac{\text{g}}{\text{mole}}) = 29 \frac{\text{g}}{\text{mole}}$$

MW = 29 g/mole

88

Equation of State

The ideal gas law:

$$PV = nRT$$

P = absolute pressure
V = gas volume
n = number of moles
R = constant
T = absolute temperature

Values for R:

10.73 psia-ft³/lb-mole-°R
0.73 atm-ft³/lb-mole-°R
82.06 atm-cm³/g-mole-K
8.31 x 10³ kPa-m³/kg-mole-K

89

Absolute Pressure

$$P = P_b + P_g$$

where

P = absolute pressure
P_b = barometric pressure or atmospheric pressure
P_g = gauge (or static) pressure

90

Standard Pressure

Units	Value
Atmosphere (atm)	1
Pounds force per square inch (psi)	14.70
Inches of mercury (in Hg)	29.92
Millimeters of mercury (mm Hg)	760
Feet of water column (ft WC)	33.92
Inches of water column (in WC)	407
Kilopascals (kPa)	101.3
Millibars (mb)	1013

Standard barometric pressure is the average atmospheric pressure at sea level, 45°N latitude, and at 35°F.

91

Standard Temperature

Group	T _{std}
USEPA (General)	68°F (20°C)
USEPA (Air monitoring)	77°F (25°C)
Industrial hygiene	70°F (21.1°C)
Combustion	60°F (15.6°C)
Science	32°F (0°C)

92

Volume Correction

$\frac{PV}{T} = nR = \text{CONSTANT (if } n = \text{CONSTANT)}$

$\frac{P_1 V_1}{T_1} = \frac{P_2 V_2}{T_2} \quad V_1 = V_2 \left(\frac{P_2}{P_1} \right) \left(\frac{T_1}{T_2} \right)$

$SCFM = ACFM \left(\frac{P_{act}}{P_{std}} \right) \left(\frac{T_{std}}{T_{act}} \right)$

$ACFM = SCFM \left(\frac{P_{std}}{P_{act}} \right) \left(\frac{T_{act}}{T_{std}} \right)$

93

Example

A particulate control system consists of a hood, ductwork, fabric filter, fan, and stack. The total gas flow entering the fabric filter is 8,640 scfm. The gas temperature in the inlet duct is 320°F and the static pressure is -10 in WC. The barometric pressure is 28.30 in Hg.

If the inlet duct has inside dimensions of 3 feet by 4 feet, what is the velocity into the fabric filter?

$V = Q_{\text{acfm}} / \text{area}$

$ACFM = SCFM \left(\frac{P_{\text{std}}}{P_{\text{actual}}} \right) \left(\frac{T_{\text{actual}}}{T_{\text{std}}} \right)$

Convert the static pressure to absolute pressure :

$P = 28.30 \text{ in Hg} \left(\frac{407 \text{ in WC}}{29.92 \text{ in Hg}} \right) + (-10 \text{ in WC}) = 375 \text{ in WC}$

$P = P_b + P_g$

94

And then...

Convert the gas temperature to absolute temperature :

$T_{\text{actual}} = 320^{\circ}\text{F} + 460^{\circ} = 780^{\circ}\text{R}$

Convert the inlet flow rate to actual conditions :

$Q_{\text{actual}} = 8,640 \text{ scfm} \left(\frac{780^{\circ}\text{R}}{528^{\circ}\text{R}} \right) \left(\frac{407 \text{ in WC}}{375 \text{ in WC}} \right) = 13,853 \text{ acfm}$

Calculate the velocity :

$V = \frac{13,853 \text{ ft}^3 / \text{min}}{3 \text{ ft} \cdot 4 \text{ ft}} = 1,154 \text{ ft} / \text{min}$

95

Molar Volume

$\frac{V}{n} = \frac{RT}{P}$

The ideal gas law may be rearranged to calculate the volume occupied by a mole of gas, called the *molar volume*

At 68°F and 1 atm. (EPA Standard conditions):

$$= \frac{\left(0.73 \frac{\text{atm} - \text{ft}^3}{\text{lb} - \text{mole} \cdot ^{\circ}\text{R}} \right) (528^{\circ}\text{R})}{1 \text{ atm}} = 385.4 \frac{\text{ft}^3}{\text{lb} - \text{mole}}$$

96

Mass Rate Calculations

$(\text{molar rate})(\text{molecular weight}) = (\text{mass rate})$

$$\left(\frac{\text{lb-mole}}{\text{min}}\right)\left(\frac{\text{lb}_m}{\text{lb-mole}}\right) = \left(\frac{\text{lb}_m}{\text{min}}\right)$$

$(\text{volumetric rate})(\text{density}) = (\text{mass rate})$

$$\left(\frac{\text{ft}^3}{\text{min}}\right)\left(\frac{\text{lb}_m}{\text{ft}^3}\right) = \left(\frac{\text{lb}_m}{\text{min}}\right)$$

Calculate *mass rate (m)* from *volumetric rate (V)*:

$$m = \frac{PV \cdot MW}{RT}$$

97

Gas Density

$$PV = \left(\frac{m}{MW}\right)RT$$

$$\rho = \frac{m}{V} = \frac{P \cdot MW}{RT}$$

98


Exercise #4 Assume an absolute pressure of 1 atm

A 70°F gas stream with a flow rate of 1,766 acfm has a heptane concentration of 20,000 ppmv. **Determine the mass flow rate of heptane.**

Determine the flow rate of pure heptane:

$$Q_{\text{heptane}} = 1,766 \text{ acfm} \left(\frac{20,000}{10^6} \right) = 35.32 \text{ acfm}$$

Calculate the molecular weight of heptane:



$$MW_{\text{heptane}} = (7)(12) + (16)(1) = 100$$

Use the ideal gas law to determine the mass flow rate of heptane:

$$PV = nRT = \left(\frac{m}{MW}\right)RT$$

$$m = \frac{PV \cdot MW}{RT} = \frac{(1 \text{ atm}) \left(35.32 \frac{\text{ft}^3}{\text{min}} \right) \left(100 \frac{\text{lb}}{\text{lb-mole}} \right)}{\left(0.73 \frac{\text{atm} \cdot \text{ft}^3}{\text{lb-mole} \cdot ^\circ\text{R}} \right) (530^\circ\text{R})} = 9.13 \frac{\text{lb}}{\text{min}}$$

99

Vapor Pressure

- Every liquid exerts a vapor pressure. Vapor pressure is the measure of the escaping tendency or volatility of the liquid. (calculated using Antoine’s equation)

Antoine equation:

$$\ln(p^*) = A - \frac{B}{T + C}$$

p^* = vapor pressure

T = temperature

A, B, C = constants

100

Exercise #1

Use the Antoine equation to estimate the vapor pressure of acetone at 0°C. For vapor pressure in mm Hg and temperature in K, the Antoine constants are $A = 16.65$, $B = 2,940$ and $C = -35.93$.

$$\ln(p^*) = A - \frac{B}{T + C} = 16.65 - \frac{2,940}{273 - 35.93} = 4.25$$

$$p^* = 70.00 \text{ mm Hg}$$

101

Other Vapor-Pressure Equation Equations

- Riedel-Plank-Miller Equation:

$$\ln P_{vp} = A + \frac{B}{T} + CT + DT^3$$

- Rankine-Kirchhoff Equation:

$$\ln P_{vp} = A + \frac{B}{T} + C \ln T$$

102

Partial Pressure

- Partial pressure is the pressure that would be obtained if the same mass of individual gas were *alone* in the same total volume at the same temperature.
- Dalton’s law of partial pressures for non-reacting gases:
 - Equation: $p_{ag} + p_{bg} = P_t$
 - p_{ag} = partial pressure of “a” in gas phase
 - p_{bg} = partial pressure of “b” in gas phase
 - P_t = total gas pressure

Partial Pressure

From the ideal gas law, it can be seen that, at constant volume and temperature, the partial pressure of a component is a function only of the number of moles of that component that are present in the mixture. Similarly, dividing the ideal gas law for component i by the gas law for the total mixture, at constant volume and temperature, gives:

$$\frac{p_i}{P_T} = \frac{n_i}{n_T}$$

Partial Volume

Amagat’s law states that the total volume of a gas mixture is the sum of the individual volumes of each component

$$\frac{v_i}{V_T} = \frac{n_i}{n_T}$$

Combining the prior two Equations gives

$$\frac{p_i}{P_T} = \frac{n_i}{n_T} = \frac{v_i}{V_T}$$

In other words, **for an ideal gas, pressure fraction equals mole fraction, which equals volume fraction**. For a gaseous system, the mole fraction of the *i*th component is generally written as *y_i*.

106

Concentration Expressions

- The concentration of an organic vapor is usually expressed as partial pressure, parts per million by volume (ppmv), or mass per unit volume.
- Partial pressure
- Parts per million by volume (ppmv)

$$\text{ppmv}_i = \left(\frac{v_i}{V_T} \right) \times 10^6$$

- Mass per unit volume

107

Exercise #2

Calculate the mole fraction and gas phase equilibrium concentration in ppmv for acetone in air at 100°F. The total pressure is 1 atm and the vapor pressure of acetone at 100°F is 7.3 psia.

Solution: From an earlier slide, the pressure fraction equals the mole fraction (*Y_{acetone}*).

$$y_{\text{acetone}} = \frac{P_{\text{acetone}}}{P_T} = \frac{7.3 \text{ psia}}{14.7 \text{ psia}} = 0.497$$

$$C_{\text{acetone}} = 0.497(10^6) = 496,589 \text{ ppmv}$$

108

Exercise #3

A gas stream at 100°F and 1 atm contains 60,000 ppmv of toluene. What temperature must the gas stream be cooled to in order to condense 40% of the toluene vapor? Vapor pressures of toluene in psia are given in the following table:

40°F	50°F	60°F	70°F	80°F	90°F	100°F
0.2	0.2	0.3	0.4	0.6	0.8	1.0

Determine the toluene concentration after condensation:

$C_{\text{toluene}} = (1-0.4)(60,000) = 36,000 \text{ ppmv}$

Determine the pressure fraction of the toluene at this concentration:

$\frac{P_{\text{toluene}}}{P_T} = \frac{V_{\text{toluene}}}{V_T} = \frac{36,000}{10^6} = 0.036$


Calculate the vapor pressure of the toluene:

$P_{\text{toluene}} = 0.036P_T = (0.036)(14.7 \text{ psia}) = 0.529 \text{ psia}$

Using the table, determine the temperature at this vapor pressure:

$T = 76.5^\circ\text{F}$

Explosive Limits

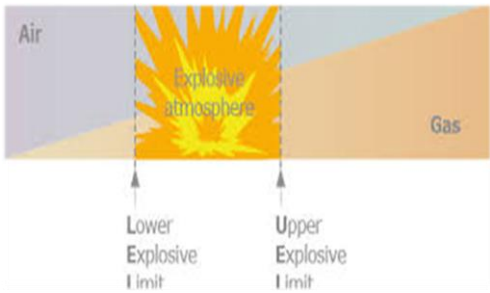


Explosion Limits

- One of the main factors to consider in designing a gaseous contaminant control system is the concentration range at which one or more of the contaminants can be ignited.
- *Potentially explosive gases and vapors:*
 - Organic compounds
 - Carbon monoxide
 - Ammonia
 - Hydrogen (sometimes present with organic compounds)
 - Hydrogen sulfide

Explosive Limit Concentrations

- **Upper Explosive Limit (UEL)**
 - Contaminant concentrations above the UEL means there is **insufficient oxygen** for the oxidation of the compounds present
- **Lower Explosive Limit (LEL)**
 - Contaminant concentrations below the LEL means there is **insufficient contaminant** for an explosion
- Normally designed for concentrations less than 25% of LEL



LEL and UEL at Room Temperature and Ambient Oxygen Concentration

Compound	Lower Explosive Limit, % by Volume	Upper Explosive Limit, % by Volume
Acetone	2.5	12.8
Acrylonitrile	3.0	17.0
Ammonia	15.0	28.0
Benzene	1.2	7.8
Carbon Disulfide	1.3	50.0
Ethyl Alcohol	3.3	19.0
Formaldehyde	7.0	73.0
Gasoline	1.4	7.6

113

LEL and UEL at Room Temperature and Ambient Oxygen Concentration (cont.)

Compound	Lower Explosive Limit, % by Volume ¹	Upper Explosive Limit, % by Volume ¹
Hydrogen	2.0	80.0
Methylene Chloride	13.0	23.0
Octane	1.0	6.5
Propane	2.1	9.5
Styrene	0.9	6.8
Toluene	1.1	7.1
Xylenes	0.9	7.0

1. Convert percent by volume to ppm by multiplying 10,000 (e.g., 2% = 20,000 ppm)

114

Percentages & Concentrations

- 1% = 10,000 ppm
- 0.1% = 1000 ppm
- 0.01% = 100 ppm
- 0.001% = 10 ppm
- 0.0001% = 1 ppm = 1000 ppb
- 0.000001% = 0.1 ppm = 100 ppb
- 0.0000001% = 0.01ppm = 10 ppb
- 0.00000001% = 0.001 ppm = 1 ppb = 1000 ppt (parts per trillion)

115

Additional LEL & UEL Considerations

- A gas stream having **contaminants with a large explosive range** requires **extreme caution** in control system design and operation
- Additional LEL and UEL concentrations for specific compounds **can be found in Material Data Safety Sheets** or other references

116

LEL of Mixtures

- Estimation of mixture LEL (**two methods**)
 1. Assume that **LEL of all contaminants equal to lowest LEL of any single contaminant** –most conservative approach (Problem 1-1)
 2. Use LeChatelier equations based on weighted average of LEL of each component (Problem 1-2)
- One of the best approaches is to have a qualified laboratory measure the LEL & UEL

117

118

119

Air Pollution Training Institute | APTI
120

Problem 1-2

- Using the same gas stream mixture discussed in Problem 1-1, estimate the LEL for the gas mixture using:

LeChatelier Equation 2-4

Eq. 2-4
$$LEL_{mixture}, \% = \frac{100}{\sum (y_i / LEL_i)}$$

Where: y_i = the concentration of component 'i' divided by the sum of the concentrations of all combustible components.

$$y_i = V_i / V_t$$

Where, V_i = volume of an individual chemical in mixture &
 V_t = total volume of all combustible chemicals in mixture.



Air Pollution Training Institute | APTI

121

Problem 1-2: Solution

Acetone, LEL = 25,000 ppm
Benzene, LEL = 12,000 ppm
Toluene, LEL = 11,000 ppm

$$LEL_{mixture} = \frac{1}{\sum (y_i / LEL_i)}$$

$$LEL_{mixture} = \frac{1}{\left[\frac{1000}{\left(\frac{25000}{1000000} \right)} \right] + \left[\frac{2000}{\left(\frac{12000}{1000000} \right)} \right] + \left[\frac{500}{\left(\frac{11000}{1000000} \right)} \right]}$$

Unit-less % of concentration

conversion of LEL from PPM to % of concentration

25% of the LEL = 0.25 (14000) = 3500 ppm
Total gas mixture = 1,000ppm + 2,000ppm + 500ppm = 3,500 ppm
Therefore, the total gas mixture concentration = 25% of the LEL_{mixture}



Air Pollution Training Institute | APTI

122

Chapter 3

Source Measurement Techniques for VOC's

3 - 1

Sampling At a Landfill Enclosed Flare



3 - 2

Sampling At A Potato Chip Fryer



Air Emission Measurement Center (EMC)

The EPA hub for stationary source air emissions test methods and procedures.

August 2020: Revisions to Test Methods and Performance Specifications for Air Emission Sources: Final Rule 8/24/2020

December 2019: Revisions to EPA Method 2A

December 2019: Revisions to Testing Regulations for Air Emission Sources

Test Methods

- Promulgated Test Methods
- Proposed Test Methods
- Approved Alternative Methods
- Conditional Test Methods
- Other Test Methods

Monitoring

- Promulgated and Proposed Performance Specifications
- Quality Assurance Procedures
- Compliance Assurance Monitoring
- Continuous Emission Monitoring
- Metals and Mercury Emissions Monitoring

Technical Support

- Technical Support for Quality Assurance, Audit Program, etc.
- EMC Methods Support Directory

Learn about EMC

- What is the EMC?
- Frequent Questions
- EMC Recent Additions
- EMC Updates and General Resources

Instructional Material

- Guideline Documents
- Technical Information Documents

Additional Resources

- EPA Websites
- State Agency and Association Websites

https://www.epa.gov/emc

Selection of VOC Test Methods

- Pennsylvania Department of Environmental Protection, “*Source Testing Manual*” (Revision 3.3), provides a general scheme for the selection of a VOC test method.
- The selection scheme does not address all of the possibilities.
- Scheme follows 2 different paths:
 - Speciated VOCs
 - Non-speciated VOCs

3 - 5

5% Speciation

10-100,000 ppmvd (TOC, as C)

>100,000 ppmvd (TOC, as C)

All known Organic Loadings

Loadings

1-10 ppmvd (TOC, as C)

10-100,000 ppmvd (TOC, as C)

>100,000 ppmvd (TOC, as C)

1-10 ppmvd (in target compounds)

10-100,000 ppmvd (in target compounds)

>100,000 ppmvd (in target compounds)

SW-48 Methods 8010, 8170, 8210

SW-48 Methods 8010, 8170, 8210

SW-48 Methods 8010, 8170, 8210

EPA Method 18

EPA Method 18

EPA Method 18

Speciated VOCs

Non-Speciated VOCs

Other VOCs

SW-48 Methods 8010, 8170, 8210

SW-48 Methods 8010, 8170, 8210

SW-48 Methods 8010, 8170, 8210

EPA Method 18

EPA Method 18

EPA Method 18

SW-48 Methods 8010, 8170, 8210

SW-48 Methods 8010, 8170, 8210

SW-48 Methods 8010, 8170, 8210

EPA Method 18

EPA Method 18


EPA Method 18

Important Note: Speciation of the exempted organic compounds (OCs) listed in 40 CFR 51.100(k)(1) is necessary in most cases, even when using a reference method, if the results are to be reported as VOC, as defined in § 1.3.1.1. Speciation is not required: (1) if it is known that the effluent does not contain any exempted compounds; or (2) if the results will not be reported as VOC (TOC or TNMOC, e.g.).

3 - 6

https://www.dep.pa.gov/Business/Air/BAQ/BusinessTopics/SourceTesting/Pages/default.aspx

3-2

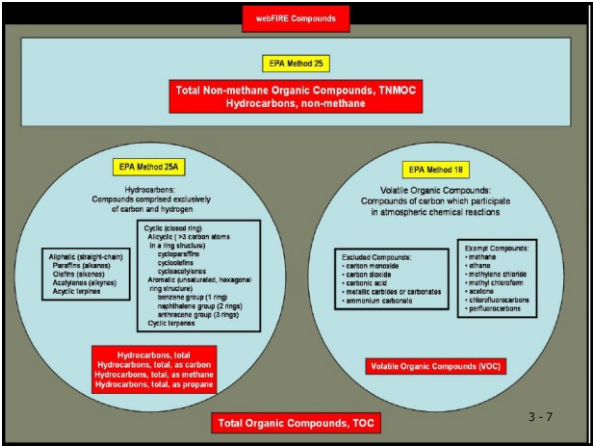

Speciation VOC Methods

- Method 18** (VOC by gas chromatograph (GC)): Based on separating components of a gas mixture in a GC column and measuring separated components with suitable detector (i.e., Flame Ionization Detector (FID)).
 - Applicable to VOC concentrations greater than 1ppm in the sampled gas.
- Method 25** (non-methane organic compounds) applies to the measurement of VOCs as total gaseous non-methane organics, condensable and non-condensable, as carbon in source emissions. (All compounds are converted to methane before measuring with a FID.)

3 - 8

Non-Speciation VOC Methods

- Method 25A** (organic concentration using a FID): This method is applicable to total gaseous organic concentration of vapors consisting primarily of alkanes, alkenes, and/or aromatic hydrocarbons.
 - Results are expressed in terms of volume concentration of propane (or other appropriate organic calibration gas) or in terms of carbon.
- Method 25B** (organic concentration using an infrared analyzer)

3 - 9
- Method 25C** (non-methane organic compounds from landfills).

3 - 9

Measurement Methods

- Method 18, Measurement of Gaseous Organic Compound Emissions by Gas Chromatography
- Method 25, Determination of Total Gaseous Non-Methane Organic Emissions as Carbon
- Method 25A, Determination of Total Gaseous Organic Concentration Using a Flame Ionization Analyzer
- **Method 320, Measurement of Vapor Phase Organic and Inorganic Emissions by Extractive FTIR Spectroscopy**

3 - 10

**Federal Reference
Method 18
General GC Methodology**

3 - 11

Method 18

- Gas Chromatography (GC)
- Generic GC method
- Determines the concentration of discrete organic compounds in the sample
- Applies to the analysis of approximately 90% of total gaseous organics emitted from an industrial source

3 - 12

Method 18 Applicability

- Suitable for measurement of about 90% of organics emitted by industrial processes
- Detection limit is about 1 ppmv
- Does not include techniques to identify and measure trace concentrations
- Will not determine compounds that are polymeric, can polymerize before analysis, or that have very low vapor pressure

3 - 13

Method 18

- Multiple sample collection techniques
- Pre-survey required if compounds are unknown
 - Confirms identity of target analytes and concentration


3 - 14

Method 18

- Sample is extracted from a single point at a rate proportional to gas velocity
- Organic components in the sample are separated by gas chromatography
- Separated compounds are analyzed with a suitable detector

3 - 15

Method 18

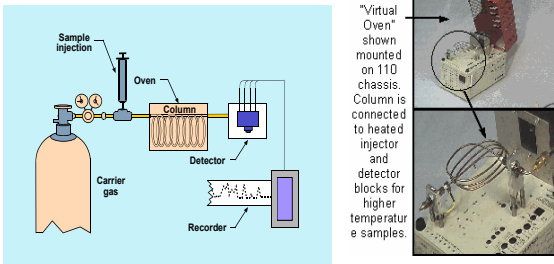

3 - 16

Applicability

- FRM 18 is a generic method which is wide open for quantifying speciated organic compounds
- FRM 18 is a “self-certifying” method.....”performance-base” method! Most all other VOC methods are “procedure-base!”
- “Regulatory science” vs. “measurement science!”

3 - 17

Applicability

- FRM 18 will not determine compounds that are
 - Polymeric (high molecular weight)
 - Analytes that can polymerize before analysis
 - Analytes that have very low vapor pressure at stack or instrument conditions ($< 10^{-3}$ mm Hg)

3 - 18

Principle

- Based on separating components of a gas mixture in a gas chromatographic column and measuring separated components with suitable detector (i.e., FID, ECD, PID, MS, IT etc.)
- Uses retention time (RT) as the identification technique compared to standards

3 - 19



3 - 20

Overview Items

- FRM 18 requires analysis of an EPA audit cylinder prior to sample analysis
- FRM 18 strongly suggest (should), performing pre-survey to help identify
 - where target pollutants are not known
 - so analytes/column/detector, so all
 - tentatively identified compounds can
 - be identified (TICs) with peaks > 5%].
- FRM 18 requires conducting a recovery study to meet 70-130 %

3 - 21

Pre-Survey Sampling Techniques

- Evacuated or purged glass sampling flasks
- Flexible bags
- Adsorption tubes
- Canisters

3 - 22



3 - 23

Overview Items

- FRM 18 provides concentration (usually in terms of “ppm”) for speciated organics
- Mass emission rate can be provided as long as FRM 1 and 2 are incorporated into the monitoring program

3 - 24

Overview Items

- FRM 18 identifies only those analytes for which sampling and analysis is specifically conducted
- FRM 18 can't be used if emissions are unknown
 - FRM 18 (CH₃OH,MW=32) 100 ppm x 32 = 3200
 - FRM 25 (C,MW=12) 100 ppm x 12 = 1200
 - Error: 62 %

3 - 25

Overview Items

- FRM 18 requires calibration of analytical system with 3 standards which bracket the concentration of the analyte in the source
 - Commercial cylinders
 - Gas cylinder dilution (FRM 205)
 - Flash vaporization
- FRM 18 requires determination of response factor for each analyte

3 - 26

Overview Items

- FRM 18, for tube sampling, requires determination of collection efficiency (CE). Tubes (800/200 mg) with no more than 10% of analyte concentration on back portion

3 - 27

Overview Items

- FRM 18 pushes you to using direct injection, Tedlar bags or adsorbents as sampling options
- FRM 18 allows correction of emissions to “Recovery Study” results: Reported emissions = FRM 18 Conc./R
- For solid adsorbent, no more than 10% of analyte found on back tube

3 - 28

Overview Items

- All tubing used in the sampling train must be Teflon...no Tygon tubing allowed
- Aluminized Mylar bags are recommended for low concentration bag sampling because of low permeation rate
- Canister sampling can only be used during survey, not for compliance application

3 - 29

RM 18 Sampling Techniques


- Direct Injection
- Integrated bag
- Glass sampling flask
- Adsorbent tubes
 - Charcoal
 - Silica Gel
 - Florisil®
 - CarboTrap® 300
 - Tenax® TA
- (Must perform recovery study for each sampling approach)

3 - 30

Direct or Dilution Interface Sampling

- Strengths
 - No loss or alteration of compounds
 - Method of choice when temperature is below 100°C and VOC concentrations are suitable
- Weaknesses
 - GC must be located at sampling site
 - Cannot sample proportionally or obtain time integrated sample


3 - 31

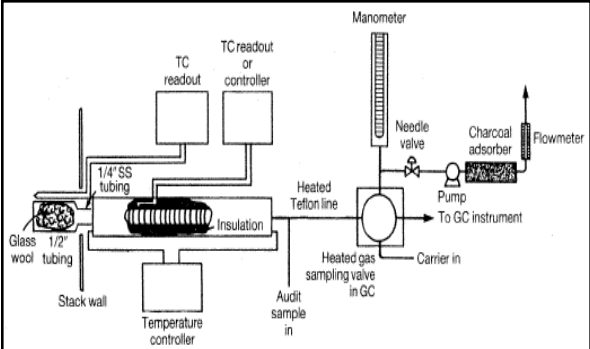

Method 18 Direct Interface Sampling

3 - 32

Adsorption Tube Sampling

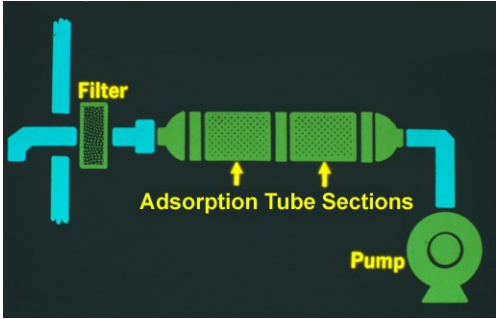

3 - 33

Adsorbent Media

- Activated carbon
- Silica gel
- Tenax
- XAD resin
- Carbopack C/Carbopack B




Adsorption Tube Sampling

- Strengths
 - Samples are compact and easy to handle
 - Samples returned to lab for analysis
 - Can be stored up to a week at 0°C
- Weaknesses
 - Breakthrough capacity must be known
 - Effect of moisture must be known
 - Quantitative recovery of compounds must be known
 - Samples must be collected at a constant rate

3 - 35

Flexible Bag Sampling

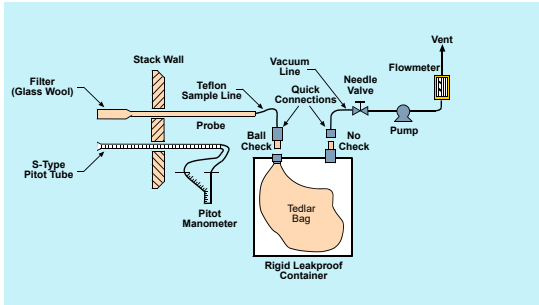

3 - 36

Flexible Bag Sampling

- Strengths
 - Samples approximate form in stack
 - Samples are returned to lab for analysis
 - Samples may be collected proportionally
- Weaknesses
 - Bags are awkward and bulky and prone to leaks
 - Compounds may adsorb onto bag surface
 - Compounds may react with bag surface or with each other
 - Storage time is generally less than 24 hours


3 - 37

Flexible Bag Sampling





3 - 38


LABORATORY ANALYSIS

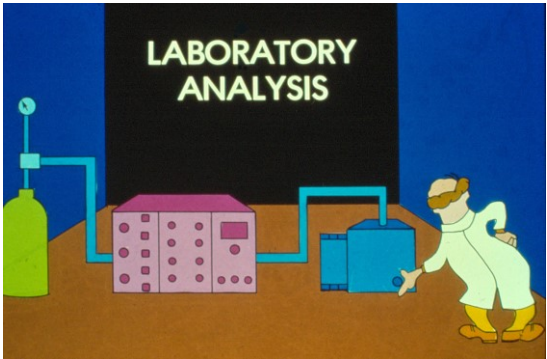



3 - 39

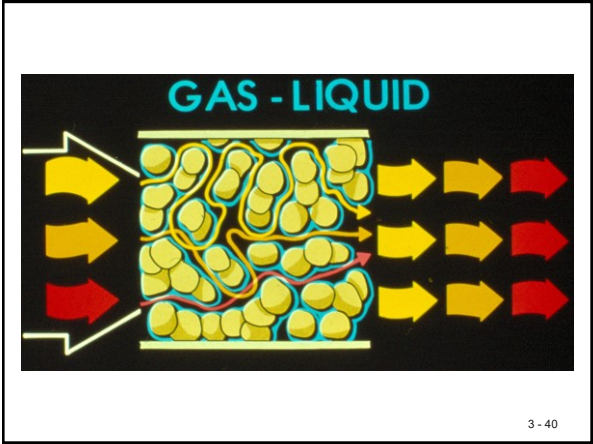


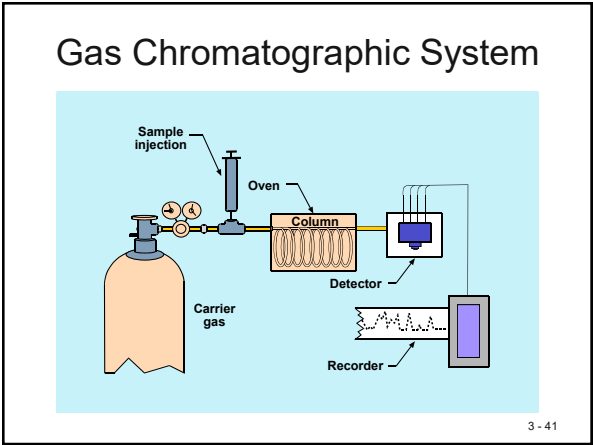

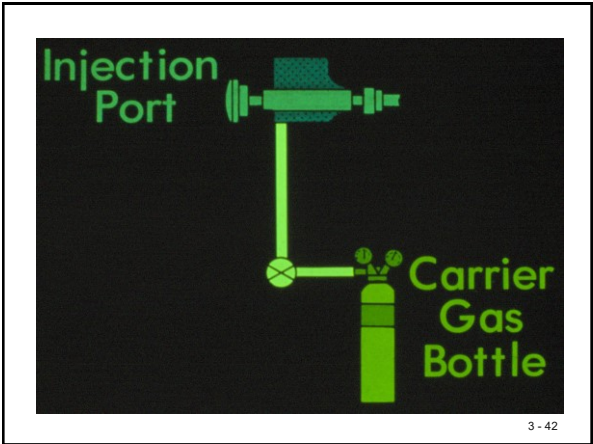


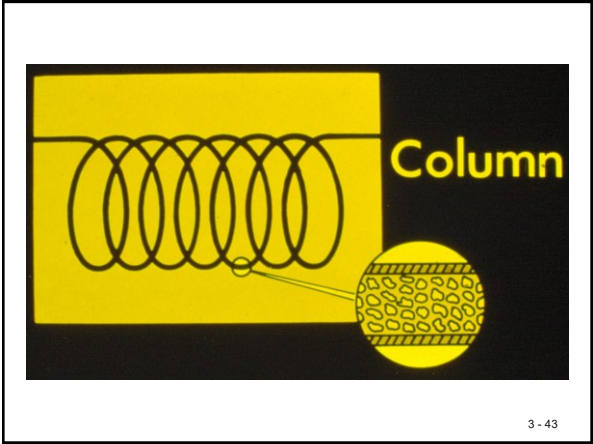

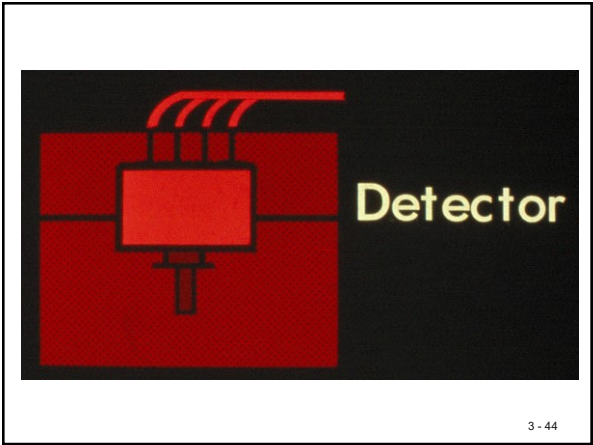

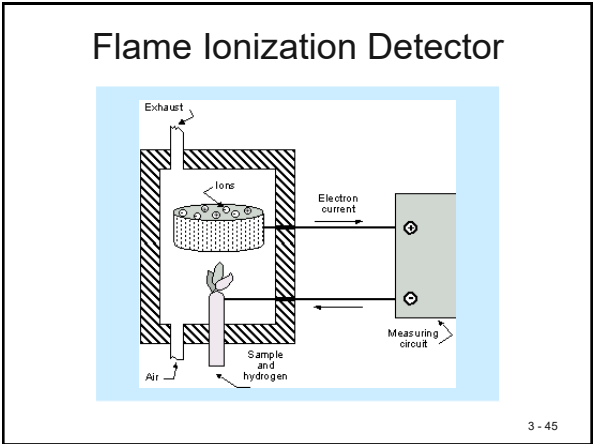


Electron Capture Detector

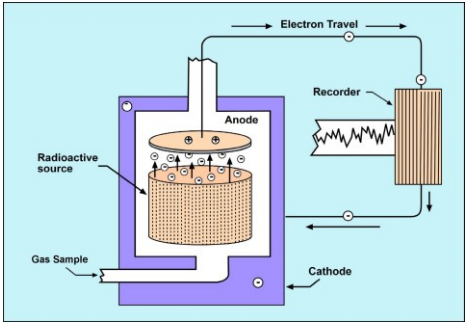


3 - 46

Chromatogram

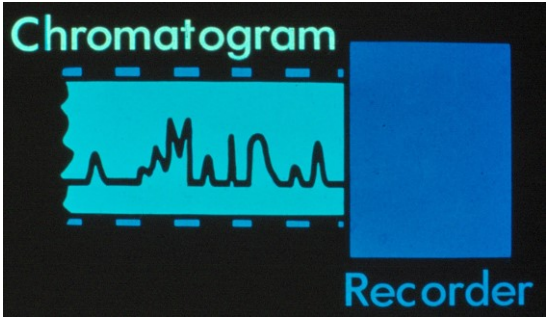

3 - 47

Standard Chromatogram of a Mixture of Gases

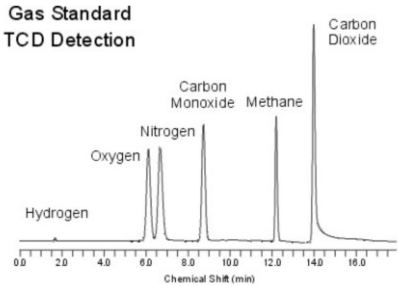

3 - 48

Regulations Specifying Method 18

- § 60.780 Standards—Control devices.
- (a) For each control device used to comply with the provisions in §§ 60.774, 60.775, and 60.779 of this subpart, the owner or operator shall operate and maintain the control device or combination of control devices in accordance with the requirements of paragraphs (b) through (g) of this section, unless otherwise specified in this subpart.
- (b) Whenever organic VOC emissions are vented to a control device used to comply with the provisions of this subpart, such control device shall be operating.
- (c) The control device shall be designed and operated in accordance with paragraph (c)(1), (c)(2), (c)(3), (c)(4), or (c)(5) of this section.
- (1) An enclosed combustion device (including but not limited to a vapor incinerator, boiler, or process heater) shall meet the conditions in paragraph (c)(1)(i), (c)(1)(ii), or (c)(1)(iii) of this section, alone or in combination with other control devices.


3 - 49

Regulations Specifying Method 18

- If a boiler or process heater is used as the control device, then the vent stream shall be introduced into the flame zone of the boiler or process heater.
- (i) Reduce the total organic compound emissions, less methane and ethane, or total VOC emissions vented to the control device by 95 percent by weight or greater; (ii) Achieve an outlet total organic compound concentration, less methane and ethane, or total VOC concentration of 20 parts per million by volume on a dry basis corrected to 3 percent oxygen.
- The owner or operator shall use either Method 18, 40 CFR part 60, appendix A, or any other method or data that has been validated according to the applicable procedures in Method 301, 40 CFR part 63, appendix A; or (iii) Provide a minimum residence time of 0.5 seconds at a minimum temperature of 760° C.

3 - 50

Method 25

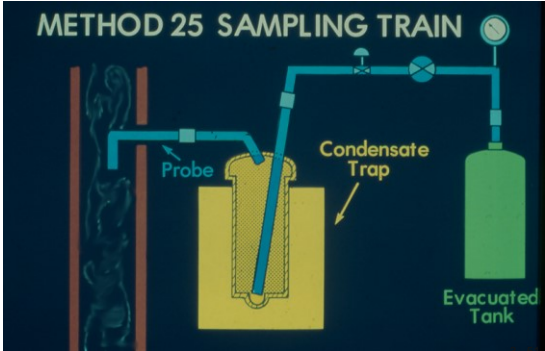

3 - 51

Method 25

- Sample is extracted from a single point at a rate proportional to gas velocity
- Sample is separated into condensable and non-condensable fractions
- Analysis yields total gaseous non-methane organic emissions as carbon

3 - 52

Method 25 Applicability

- Organic compounds which are a gas or have significant vapor pressure at or below 250°F
- Sources with concentrations of 50 ppmv to 5% by volume
- High concentrations of CO₂ and water vapor can cause interference at low concentrations

3 - 53

Method 25 Applicability

- Not Applicable
 - For measuring concentrations of VOCs or mass emissions of VOCs from sources whose concentrations are < 50 ppm
 - Possible bias when:
 - % CO₂ X % H₂O > 100
 - As water freezes in the trap, CO₂ is trapped out prematurely. The CO₂, when reduced to methane, is counted as VOCs in the analytical system


3 - 54

Method 25 Applicability

- Not Applicable
 - For measuring emissions from sources whose principle solvents are chlorinated hydrocarbons
 - Generally, for any situation, where a simpler procedure is more accurate
 - For sources with VOC emissions typically < 50 ppm


3 - 55

Method 25 Sampling Train

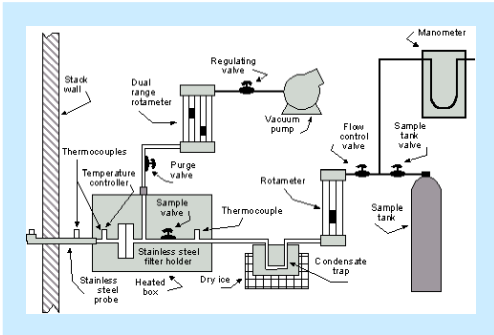


3 - 56

Method 25 Lab Analysis

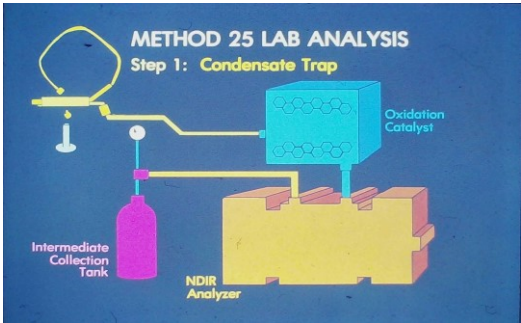

3 - 57

Method 25 Lab Analysis

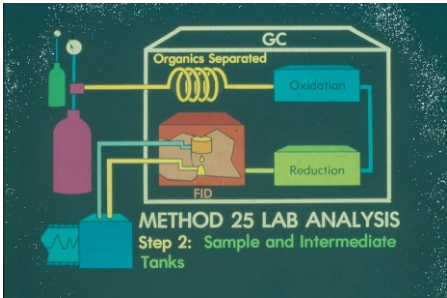


3 - 58

Method 25 Analysis

- Condensate trap is purged with zero air and purged gas is collected in the sample tank
- Condensed VOCs are volatilized, oxidized to CO₂, and collected in a second tank
- VOCs in the sample tank are separated with GC, oxidized to CO₂, reduced to methane and measured by FID
- CO₂ peak in second tank is measured and counted as VOCs
- Total VOCs is the sum of both analyses

3 - 59

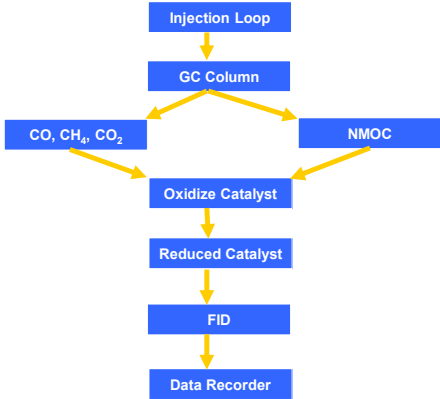

3 - 60

Method 25 Advantages

- Advantage
 - Gives constant results from source to source whether sample composition is known or not
 - Sample train does require heated probe and filter, but is less complicated than FRM 5 hardware advantage

3 - 61

Method 25 Disadvantages

- Disadvantage
 - Will not yield true mass emission rate nor instantaneous results
 - No real time data (sample must be returned to laboratory for analysis)
 - High moisture and CO₂ together can cause interference
 - (%CO₂)(%H₂O)>100 gives potential high bias (EPA Guidelines)


3 - 62

Method 25 Disadvantages

- Disadvantage
 - No on-site data
 - QA/QC of the sampling train is only done prior to testing
 - No final leak check
 - Results sent out for analysis
 - Has a synergistic effects in high moisture and CO₂ atmospheres
 - Detection limit 50 ppm as Carbon

3 - 63

Method 25A

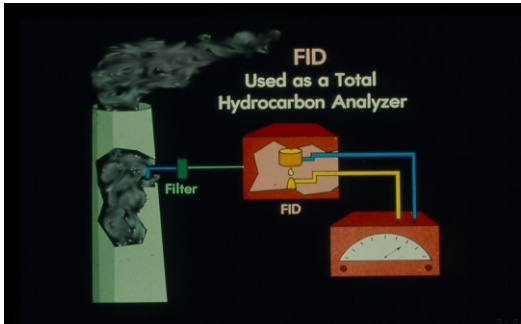

Method 25A

- Measures total organic concentration on a continuous, real-time basis using an FID
- Method is best applied to the measurement of vapors consisting primarily of alkanes, alkenes or aromatic hydrocarbons
- Gives reduced response to compounds that are highly substituted or chlorinated


3 - 65

Method 25A Basic Theory

- Sample is introduced into an ionization chamber and burned
- Process separates free ions
- Free ions are attracted to a collecting electrode
- Collection of the ions results in an increased current which is proportional to the concentration of the compound
- By-products are H₂O and CO₂

3 - 66

Method 25A Sampling Train

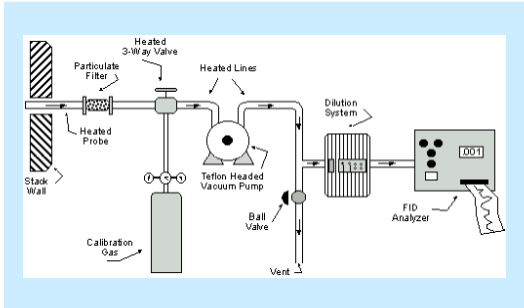

3 - 67

Method 25A Inlet/Outlet Testing At A Thermal Oxidizer Test



3 - 68

Method 25A

Advantages

- Wide dynamic and linear range (0-10,000 ppm)
- Highly sensitive to hydrocarbon vapors
- Very stable and repeatable
- Unaffected by ambient levels of CO, CO₂ and water vapor

3 - 69

Method 25A

- Disadvantages
 - Requires oxygen > 16% to operate
 - Total hydrocarbon detector - not specific
 - Value report in terms of calibration
 - Under estimates long chain, halogenated and oxygenated hydrocarbons

3 - 70

Method 25A


- The use of Method 25A usually must be justified to regulatory agencies instead of using Method 25.
- Key points would be:
 - Expected concentration < 50 ppm
 - VOCs known to consist of C and H

3 - 71

Applicability of Methods

	FRM 18	FRM 25	FRM 25A
Measures...	VOCs	TGNMO	THC
Principle...	GC/MD	GC/FID	FID
Carbon Resp...	1:1	1:1	Var.
Results Exp As..	VOC	As C	Cal Gas

3 - 72

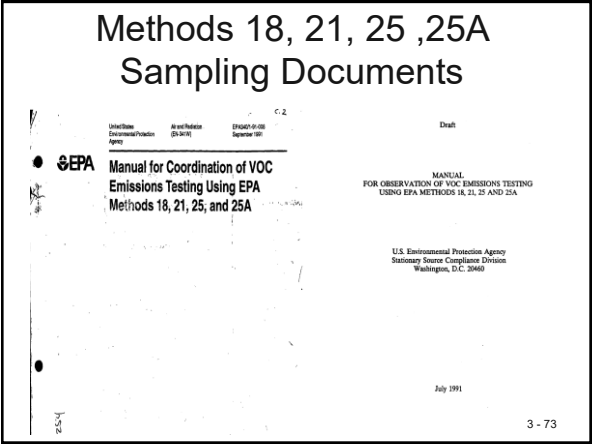

Example of NMOC Calculation For An Enclosed Flare

A control system designed and operated to reduce NMOC by 98 weight percent, or, when an enclosed combustion device is used for control, to either reduce NMOC by 98 weight percent or reduce the outlet NMOC concentration to less than 20 parts per million by volume, dry basis as hexane at 3 percent oxygen. The reduction efficiency or parts per million by volume must be established by an initial performance test to be completed no later than 180 days after the initial startup of the approved control system using the test methods specified in § 60.764(d).

3 - 74

Example

$\text{ppm}_{\text{corr}} = \text{ppm}_{\text{methane}} \times \frac{1 \text{ carbon in methane}}{6 \text{ carbons in hexane}}$

$\times (20.9 - 3 \% \text{ O}_2) \times \frac{1}{1 - \% \text{ Moisture}}$

Emission Rate (VOC ppm as Hexane @3% O₂)

VOC ppm as Hexane @3% O₂ = ((VOC ppmd * 3) / 6) * (20.9 - 3) / (20.9% O₂ - O₂%d)

VOC ppm as Hexane @3% O₂ = 6.205 * (20.9 - 3) / (20.9 - 13.78)


VOC ppm as Hexane @3% O₂ = 10.278

3 - 75

Method 320

- Sample is extracted from the gas stream
- IR absorption spectra determined by directing IR beam through sample cell to a detector
- Compounds determined by matching to known spectra
- Concentrations determined by reference samples


3 - 76

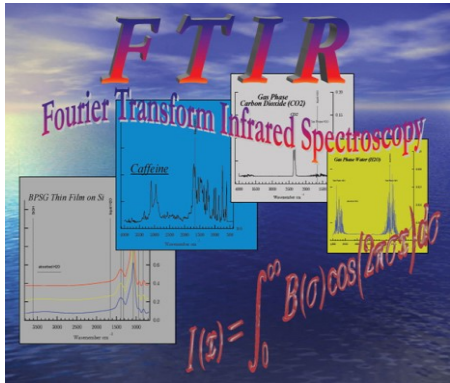

3 - 77

FTIR


- Wavelength of light absorbed is characteristic of the chemical bond
- FTIR spectra of pure compounds are generally so unique that they are like a molecular "fingerprint"



3 - 78

FTIR Theory and Instrumentation

- The heart of the system is the interferometer in which the light from the source is divided into two beams.
- Beams pass through the sample cell and then recombine resulting in a signal.
- All information required to identify and quantify the gases in the sample is present in the interferogram.
- Interferogram signal is converted to a frequency spectrum by a mathematical technique called Fourier Transformation.




79


FRM 320


- “...This method applies to the analysis of vapor phase organic or inorganic compounds which absorb energy in the mid-infrared spectral region, about 400 to 4000 cm⁻¹ (25 to 2.5 μm). This method is used to determine compound-specific concentrations in a multi-component vapor phase sample, which is contained in a closed-path cell. Spectra of samples are collected using double beam infrared absorption spectroscopy. A computer program is used to analyze spectra and report compound concentrations.”


3 - 80

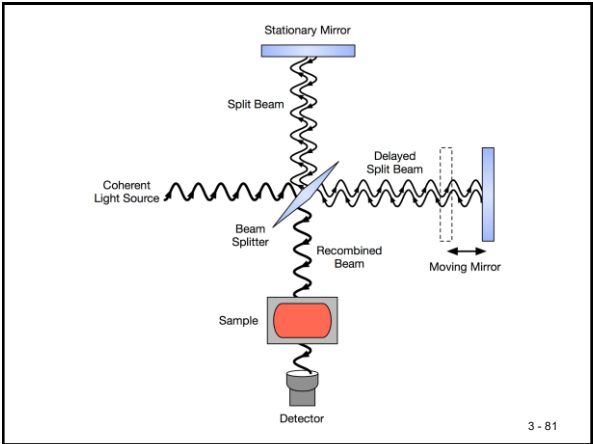



3 - 81

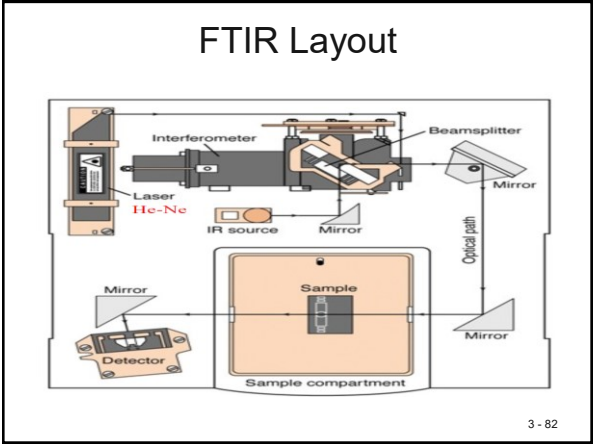

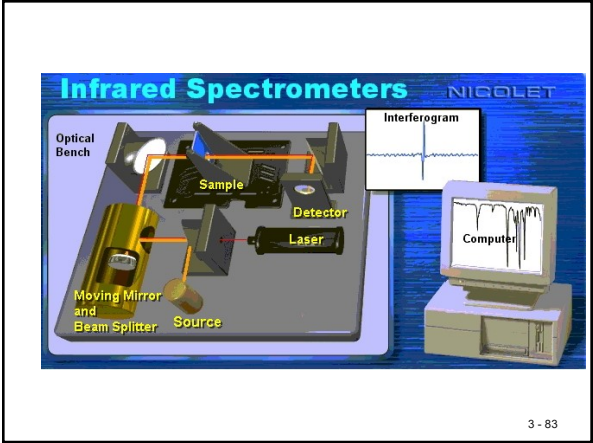

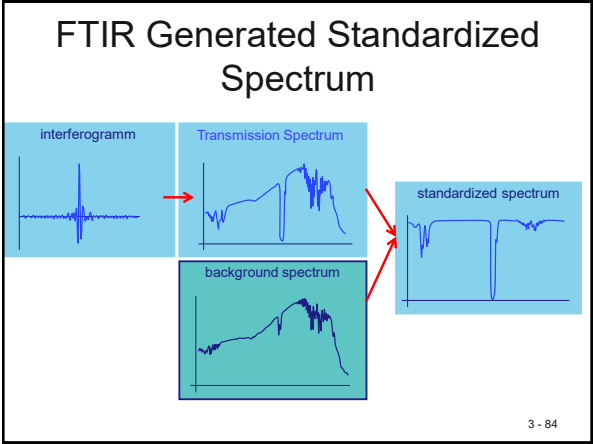

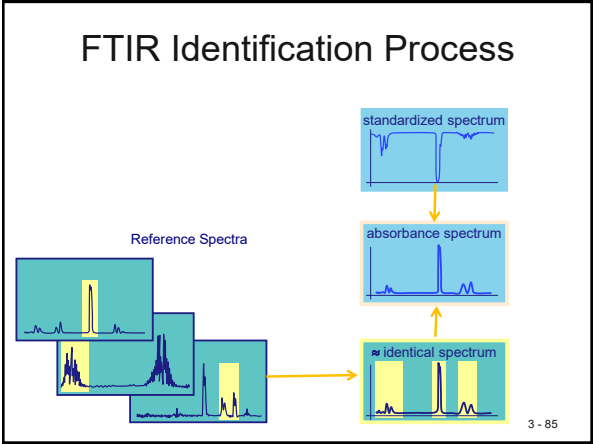

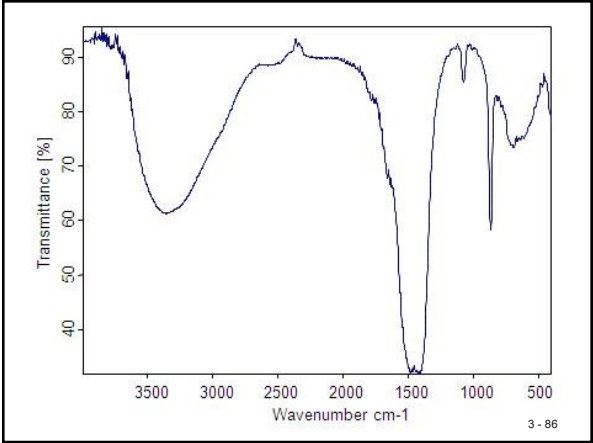

U.S. EPA APTI
 Compliance Test and Source
 Test Observation

FRM 204
 PTE/TTE Enclosures,
 Capture Efficiency /Calculations

3 - 87

USEPA Method 204

- Procedure used to determine whether a permanent or temporary enclosure meets the criteria for a total enclosure.
- An enclosure is evaluated against a set of criteria. If the criteria are met and if all the exhaust gases from the enclosure are ducted to a control device, then the volatile organic compounds (VOC) capture efficiency (CE) is assumed to be 100 percent, and CE need not be measured


3 - 88

THC/OHAP Control Techniques – Capture Systems

- General description
 - Two types of systems
 - Enclosures and local exhausts (hoods)
 - Two types of enclosures
 - Permanent total (M204 definition) – 100% capture efficiency
 - Non-total or partial – must measure capture efficiency via Method 204
- Total THC control efficiency is product of capture and control device efficiencies

3 - 89

THC/OHAP Control Techniques – Capture System

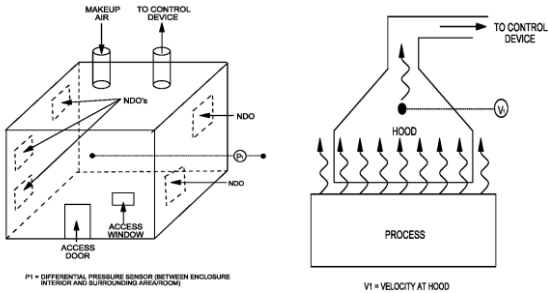

90

THC/OHAP Control Techniques – Capture Systems


- Compliance monitoring (parametric)
- Permanent total enclosures
 - Differential pressure (e.g., < -0.007 in. H₂O)
 - Daily inspections
- Local capture (design and work practice)
 - Conduct visible (smoke tubes during testing) and portable analyzer leak checks
 - Set spacing above process
 - Monitor exhaust flow rate/differential pressure in duct near hood

3 - 91

Methods 204A – F (See EMC)

Method 204A	Volatile Organic Compounds in Liquid Input Stream
Method 204B	Volatile Organic Compounds in Captured Stream
Method 204C	Volatile Organic Compounds in Captured Stream - Dilution Technique
Method 204D	Fugitive Volatile Organic Compounds From Temporary Total Enclosure (TTE)
Method 204E	Fugitive Volatile Organic Compounds From Building Enclosure
Method 204F	Fugitive Volatile Organic Compounds From Liquid Input Stream - Distillation

3 - 92

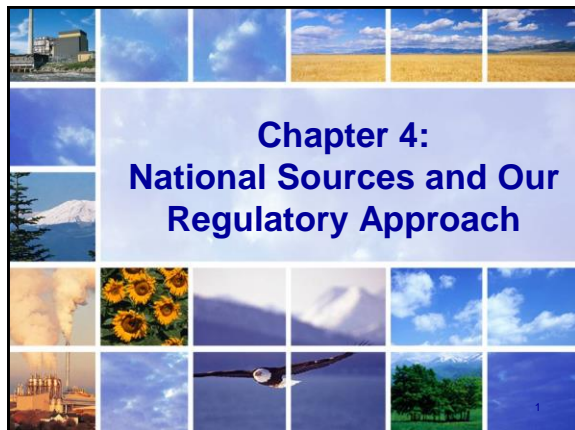

What is a VOC

- 40 CFR § 51.100(s): “*Volatile organic compounds (VOC)* means any **compound of carbon**, excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate, which participates in atmospheric photochemical reactions.
- (1) This includes any such organic compound other than the following, which have been **determined to have negligible photochemical reactivity**: methane; ethane;...etc.”
 - The following links continues the CFR list of exempt VOCs”
 - <https://www.law.cornell.edu/cfr/text/40/51.100>
- The following link is EPA’s list of exempt VOCs:
 - <https://www.epa.gov/ground-level-ozone-pollution/complete-list-voc-exemption-rules>
- Exemption from the EPA’s VOC definition does not exempt it from other regulation, such as due to its toxicity, greenhouse gas formation or other properties. CAA -2


Exempt VOCs

- Section 302(s) of the CAA requires the regulation of VOC. The Act specifies that **EPA has the authority to define the meaning of “VOC”** and, hence, **what compounds shall be treated as VOC**.
- The policy of excluding negligibly reactive compounds (from the definition of VOC) was first laid out in the “Recommended Policy on Control of Volatile Organic Compounds” (42 FR 35314, July 8, 1977).
- The EPA uses the reactivity of ethane as the threshold for determining whether a compound has negligible reactivity. Compounds that are less reactive than ethane may be deemed negligibly reactive. Compounds that are more reactive than ethane continue to be considered VOC.
- Source: (88 FR 8226 -Feb 8, 2023) CAA -3

VOC Sources and Effects of Ozone

- Effects of Ozone
- Ozone Formation
- VOC Emission Sources and Emission Trends

4-4

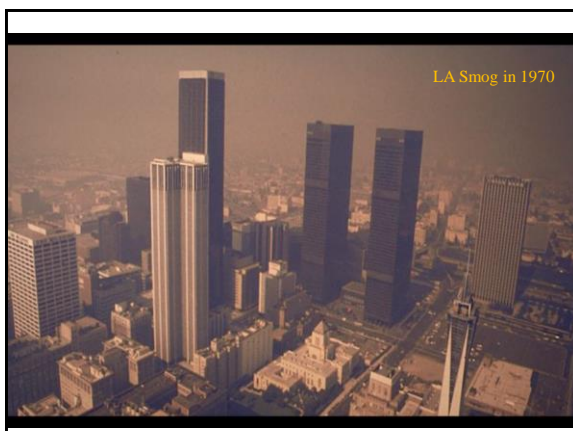

LA Smog Problem: a Hot Political Issue

- **In 1946**, LA addressed smudge pots to heat citrus groves.
 - Thought smog caused by SO_2 – like in other big cities
- **In 1947**, Cal governor Earl Warren signed first state Air Pollution Control Act, creating an AP Control District in every county.
- **1949 to early 1950's**: **Professor Haagen-Smit** of Caltech studied the causes & effects of smog. That a photochemical reaction was responsible for smog rather than particulates.




4-6

Ozone (O_3) Health Impacts

- ▶ VOCs react in the atmosphere to create ground-level ozone
- ▶ Human health impacts of ground-level ozone include:
 - ▶ Causing coughing and sore or scratchy throat
 - ▶ Making it more difficult to breathe deeply and vigorously and causing pain when taking a deep breath
 - ▶ Inflaming and damaging airways
 - ▶ Making the lungs more susceptible to infection
 - ▶ Aggravating lung diseases such as asthma, emphysema, and chronic bronchitis
 - ▶ Increasing the frequency of asthma attacks
- ▶ The following groups have the greatest risk of developing ozone related health problems:
 - ▶ Children
 - ▶ Older Adults
 - ▶ Individuals frequently active or working outdoors
 - ▶ Individuals with asthma

For more information visit:

- ▶ <https://www.epa.gov/ground-level-ozone-pollution/health-effects-ozone-pollution>
- ▶ <https://www.epa.gov/ozone-pollution-and-your-patients-health/health-effects-ozone-general-population>

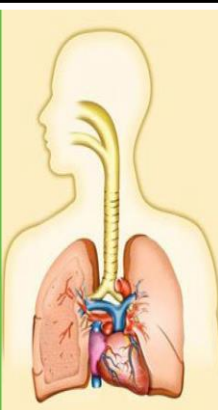

Environmental Effects of Ozone

- Scientific evidence shows that repeated exposure to ozone has harmful effects on plants and trees.
- These effects include visible injury to leaves, decreased photosynthesis, reduced vegetation growth, and reduced yield and quality of agricultural crops.


4-8

Sources of Ozone


- Ozone is not emitted directly into air, but is formed as a byproduct of the reaction of VOC and NO_x in the presence of sunlight.
- In order to reduce ambient ozone, VOC sources are studied and regulated.



4-9

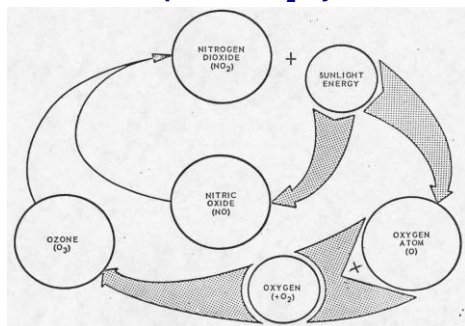
Atmospheric NO_2 Cycle

4-10

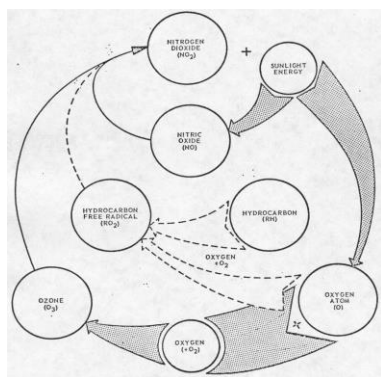Interaction of Hydrocarbons with Atmospheric NO_2 Cycle

There is a buildup of ozone & NO_2 , because NO has a stronger attraction to react with free radicals than with ozone.

4-11

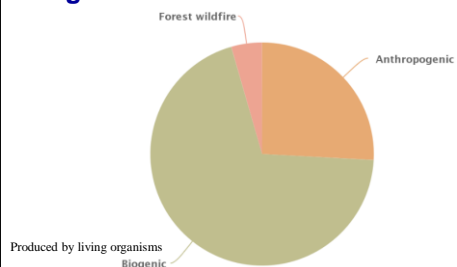
U.S. VOC Emissions from Anthropogenic, Biogenic & Forest Wildfire Sources: 2014

Source: EPA Report on the Environment web page; access 2024

4-12

Anthropogenic VOC Emissions by Source Category: 1990 - 2023


According to the 2002 VOC Manual, the greatest contributor to national industrial VOC emissions in 1998 was solvent utilization (with surface coating being the major contributor). The second largest contributor was the oil & natural gas industry. According to the EPA's Oil & Gas Industry web page, in 2023, the oil & Gas natural gas industry is the largest industrial source of emissions of VOC in the US.

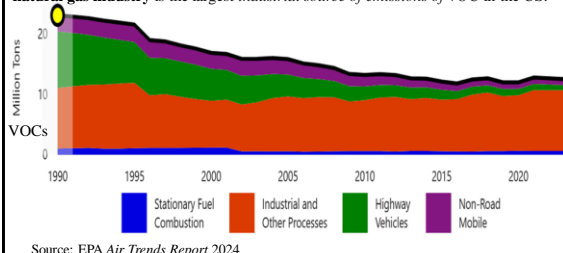

Volatile chemical products (VCPs) emerging as largest petrochemical source of urban organic emissions

“A detailed mass balance demonstrates that the use of volatile chemical products (VCPs)—including *pesticides, coatings, printing inks, adhesives, cleaning agents, and personal care products*—now constitutes half of fossil fuel VOC emissions in industrialized cities.”

– (Upstream Emissions: i.e. oil and natural gas extraction, oil refineries, and chemical manufacturing facilities)

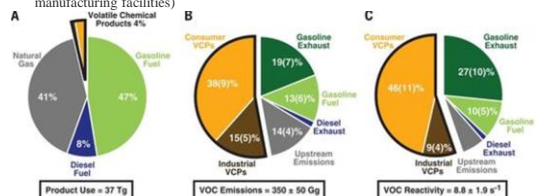

Regulatory Approach for Ozone Under the CAA

Donora Episode: Oct. 26, 1948

- Start of a 5-day temperature inversion
- City surrounded by mountains
- 50% of all residents sick (6,000 people)
 - Chest pains & labored breathing, etc.
- 20 people died
- Investigations resulted, but none could produce direct evidence of air pollution's harm. Surgeon General, Scheele, wrote in the foreword of a 1948 report studying the air pollution effects of the Donora episode: *"This study is the opening move ... in improving the nations health. We have realized during our growing impatience with the annoyance of smoke, that pollution from gases, fumes & microscopic particles was also a factor to be reckoned with."*



Federal Legislative Landmarks

- **1955 Air Poll. Control Act:** Fed research funding
- *Debates:* Fed or state responsibility
- **1963 CAA:** (compromise) Funding for state air programs
- **1965 CAAA:** Auto emission stds. (CO & HxCx)
- *Debates:* national stds. vs. regional stds.
ambient air stds. vs. emission stds.
- **1967 Air Quality Act:** States set regional air quality stds. based on federal air quality criteria
 - States failed to set stds., collect ambient air data & conduct emission inventories (21 SIPs submitted; none approved)
 - HEW (understaffed) failed to set air quality control regions
- **1970 CAAA:** (sharply increased fed authority)
 - Uniform NAAQS, SIP, NSPS, NESHAP, & mobile sources

4-17

Passage of the 1970 CAA

President Richard Nixon
signs the CAA on Dec 31,
1970



Senator Edmund Muskie:
Chairman of the
Subcommittee on Water and
Air Pollution



4-18

Federal Legislative Landmarks

- **1977 CAA Amendments:**
- Prevention of Significant Depreciation (PSD) program created
- Non-attainment provisions (added Part D to the CAA)
- Visibility impairment addressed for first time



4-19

Federal Legislative Landmarks


1990 CAA Amendments

- Revised HAP program
- Acid Rain & Ozone depletion
- Title V Operating Permits
- Strengthened enforcement provisions
- New classifications for non-attainment areas



Ozone Nonattainment Regions

Sub-classified on severity of non-attainment (under CAA Subpart II)



4-21

Regulatory Approach for Ozone Under the CAA

- NAAQS
- Ozone Nonattainment Classifications
- History of the Ozone NAAQS
- Nonattainment Area SIP Requirements
- HAP Program for Regulating VOC HAPs
- NSPS & NSR for VOC Sources
- Title V
- Interstate Transport of Ozone

4-22

NAAQS

- 6 criteria pollutants:
 - NO₂, CO, SO₂, Ozone, Lead, PM10 & PM2.5
 - <https://www.epa.gov/criteria-air-pollutants/naaqs-table>
- Primary standard: (public health)
 - “*adequate margin of safety*” to protect people regardless of age, health etc.
 - EPA cannot consider “costs” of implementation in setting the standard.
- Secondary standard: (public welfare)
- EPA to review NAAQS every 5 years

4-23

National Ambient Air Quality Standards


Pollutant	Averaging Time	Primary	Secondary
PM-2.5 (2024)	Annual	9 µg/m ³	None
PM-2.5 (2006)	Annual	None	15 µg/m ³
PM-2.5 (2006)	24-hour	35 µg/m ³	Same
PM-10 (1987)	24-hour	150 µg/m ³	Same
SO ₂ (2010)	1-hour	75 ppb	None
(1971)	3-hour	None	500 ppb
CO (1971)	8-hour	9 ppm	None
(1971)	1-hour	35 ppm	None
Ozone (2015)	8-hour/day	0.070 ppm	Same
NO ₂ (2010)	1-hour/day	100 ppb	None
(1971)	Annual	53 ppb	Same
Lead (2008)	3mo. average	0.15 µg/m ³	Same

CAA-24

History of Ozone NAAQS


- 1971: EPA set primary/secondary standards for “total photochemical oxidants” (VOCs) at 0.08ppm (1 hr.).
- 1979: EPA set primary/secondary standards for “ozone” at 0.12ppm (1 hr.).
- 1997: EPA set primary/secondary standards for “ozone” at 0.08ppm (8 hr.).
 - All nonattainment areas use classification scheme.
- 2008: EPA set primary/secondary standards for “ozone” at 0.075ppm (8 hr.).
- 2015: EPA set primary/secondary standards for ozone at 0.070ppm (8 hr.).

4-25

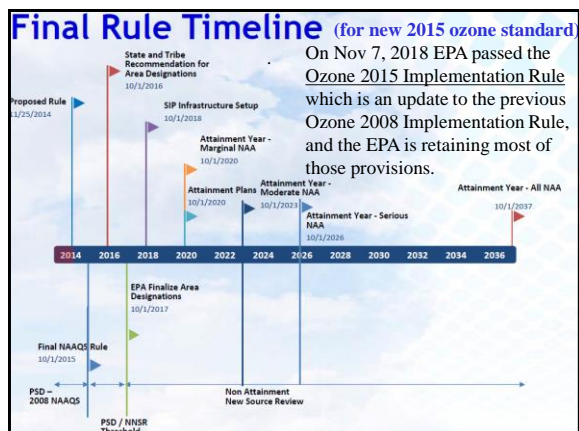

Ozone Air Quality, 1990 - 2023

Ozone 8-hour Concentration

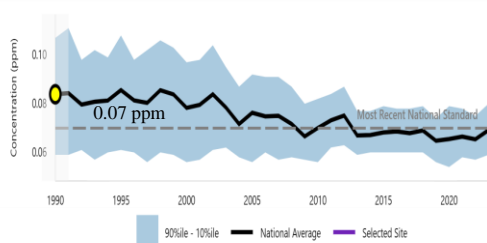

Source: EPA Trends Report 2024

4-27

Air Quality Control Regions (247 air quality control regions in USA)

- **Attainment:** Any area that meets the NAAQS
- **Nonattainment**
 - Any area that does not meet primary and secondary NAAQS for that pollutant
 - Any area that contributes to the ambient air quality in a nearby areas that does not meet primary and secondary NAAQS for that pollutant
- **Unclassifiable:** Any area with insufficient air quality data to determine the compliance status

4-28

Non-attainment Regions

- Sub-classified on severity of non-attainment (under CAA Subpart II)
- Ozone
 - Extreme
 - Severe (two levels)
 - Serious
 - Moderate
 - Marginal
- CO & and Particulate Matter (PM₁₀ & PM_{2.5})
 - Serious
 - Moderate


4-29

Non-attainment Classifications

- Extend compliance date
- Different substantive requirements: i.e. 1997 O₃

Requirement	Marginal	Moderate	Serious	Severe	Extreme
Compliance Date (8-hr, O ₃)	6/2007	6/2010	6/2013	6/2021	6/2024
Inspection & Maintenance	None	Basic I&M	Enhanced I&M	Enhanced I&M	Enhanced I&M
Reformulated Gas	None	None	None	Required	Required
NSR (Major)	100 TPY	100 TPY	50 TPY	25 TPY	10 TPY
NSR (Offsets)	1.1 to 1	1.15 to 1	1.2 to 1	1.3 to 1	1.5 to 1

CAA-30

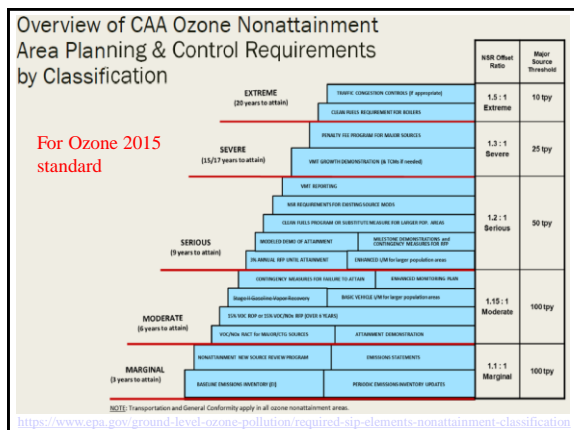

Non-attainment Classification



- Non-attainment classification is based on a criteria pollutant's "design value" falling in between a designated "design value" range established for the classification category.
 - Ozone: *design value ranges* shown in next slide.
 - Ozone *design value* is the 4th highest daily maximum 8-hour concentration averaged across the last 3 consecutive years.

4-32

Design Values Ranges for the 2015 Ozone Standard

Area Class	Design Value (PPM)	Attainment Date: 6/15
Marginal	0.071 to 0.081	2021 – 3yrs
Moderate	0.081 to 0.093	2024 - 6yrs
Serious	0.093 to 0.105	2027 - 9yrs
Severe-15	0.105 to 0.111	2033 - 15yrs
Severe-17	0.111 to 0.163	2035 - 17yrs
Extreme	0.163 and above	2038 - 20yrs

CAA-38

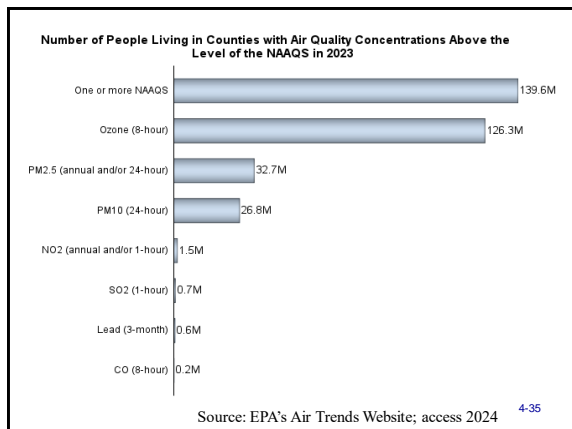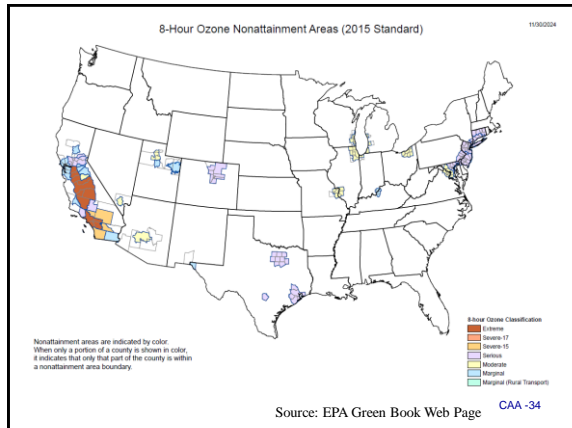

State Implementation Plan (SIP)

- A SIP is the air pollution measures & strategies adopted by a state for attaining and maintaining the NAAQS
 - i.e. new emission standards, emission inventories, monitoring, modeling, & enforcement program etc.
- A state SIP must be approved by the EPA
- If SIP is disapproved, EPA must promulgate a *Federal Implementation Plan (FIP)* & other sanctions:
 - FIP implemented 1.5 years after federal disapproval
 - Under CAA §179: Highway funding reduced &
 - New source offset at a 2 to 1 ratio

Nonattainment Area SIP Requirements

- CAA §172 requires that nonattainment area SIPs must implement “*Reasonable Available Control Measures*” (**RACM**). These include:
 - Existing major stationary sources must use (**RACT**) “*Reasonably Available Control Technology*” (considers economic and technological feasibility)
 - Transportation control measures
 - Novel alternatives (i.e. market emission trading)
- *Reasonable further progress* (annual increments) towards attaining NAAQS by the attainment date.

4-37

Control Technology Guidelines (CTGs)

- In order to provide the states guidance in setting RACT emission limits, EPA has published a series of documents referred to as *Control Technique Guidelines* (CTGs).
- These documents are not regulations, but serve only as an information base from which state and local agencies can develop their own regulations.
- Although the CTG process (including public review) has not been active since the mid-1990s, the *Alternative Control Technology* (ACT) documents were developed after 1990. These documents are issued without review; however, they contain only descriptions of alternative controls, with no recommended RACT emission limit.

4-38

Control Technology Guidelines (CTGs)

- *Control Techniques Guidelines* are used to define VOC RACT while *Alternative Control Techniques* (ACTs) describe available control technologies and their respective cost effectiveness.
- The following link is to EPA’s CTGs & ACTs:
 - <https://www.epa.gov/ground-level-ozone-pollution/control-techniques-guidelines-and-alternative-control-techniques>

4-39

The following is a limited list of stationary source categories for which a CTGs has been developed

Source Category	Reference No.
Surface coating operations	EPA 450/2-76-028
Surface coating of cans, coils, paper, fabrics, automobiles, and light-duty trucks	EPA 450/2-77-008
Surface coating of metal furniture	EPA 450/2-77-032
Surface coating of insulation of magnet wire	EPA 450/2-77-033
Surface coating of large appliances	EPA 450/2-77-034
Storage of petroleum liquids in fixed roof tanks	EPA 450/2-77-036
Bulk gasoline tanks	EPA 450/2-77-035
Solvent metal cleaning	EPA 450/2-77-022
Use of cutback asphalt	EPA 450/2-77-037
Refinery vacuum producing systems, wastewater separation, and process unit turnarounds	EPA 450/2-77-025
Hydrocarbons from tank truck gasoline loading terminals	EPA 450/2-77-026
Design criteria for Stage I vapor control systems--gasoline service stations	USEPA, OAQPS, November 1975 CAA -40


Re-designation

- **EPA re-designates an area from nonattainment to attainment**
 - Need 3 years of violation free data
 - State submits a request satisfying 5 requirements (CAA §107(d)(3)(e))(includes a “**maintenance plan**”)
- **Maintenance Plan** is a SIP revision to assure continued compliance
 - Specifies what you are going to do if the standard is violated after being re-designated attainment

4-41

Overlap Between HAPs and Criteria Pollutants

- Many HAPs are VOC:
 - Ozone formation



4-42

1970 CAAA Air Toxics Program Required EPA to:

- List chemicals they decide are hazardous:
 - Arsenic, asbestos, beryllium, mercury, benzene, vinyl chloride, radionuclides and coke oven emissions
- Set an emission limitation (NESHAP) in 1 year (after listing) with “ample margin of safety” protection.
 - 1976: EPA originally set NESHAP by:
 - 1st *Does it cause cancer?* Yes, then “shut it down.”
 - If shutting it down is impractical, then (2nd) take action to *reduce risk by considering cost & technical feasibility*.
- *NRDC v EPA* (1987): vinyl chloride case
 - NRDC contended: use zero emission when no safe level can be determined
 - Held: use 2 step process
 - Health based standard

400 - 1 - 43

Hazardous Air Pollutants: 1990 Amendments

- Congress lists 189 substances as HAP
 - EPA can add or delete
- EPA to list sources of HAP
 - 174 major and 8 area sources
- EPA to establish a control *technology - based emission standards* (MACT)
 - 25% in 2 yrs; 50% in 7 yrs; all in 10 yrs.
- Residual Risks program
 - 8 yrs. after MACT: EPA required to pass *health-based* emission standards if necessary

4 -44

Risk & Technology Review (RTR)

- EPA must conduct a risk & technology review on MACTs every 8 years.
 - **Technology review:** to determine if there are *new developments in practices or control technologies* that may be appropriate to incorporate into the standards.
 - **Risk review:** conduct a “risk assessment” for any remaining risks and then protect public health with an “ample margin safety.” (health-based standard)
- <http://www.epa.gov/ttn/atw/risk/rtrpg.html>

4 -45

Major Source under HAP

- **Major source:** a stationary source that has the potential to emit *more* than:
 - 10 tpy of a listed HAP, or
 - 25 tpy of a combination of listed HAP
- All HAP major sources must meet MACT (done in your Title V permit)
- **Area source:** a HAP stationary source that's PTE is less than major source requirements
- Many VOCs are also classified as volatile hazardous air pollutants (VHAP)

4 -46

MACT Standards for VHAP Sources (40CFR63)

Subpart	Source Category
F	Organic hazardous air pollutants from the SOCM
G	Organic hazardous air pollutants from the SOCM for process vents, storage vessels, transfer operations and wastewater
H	Organic hazardous air pollutants for equipment leaks
I	Organic hazardous air pollutants for certain processes subject to the negotiated regulation for equipment leaks
M	Perchloroethylene dry cleaning facilities
O	Ethylene oxide emissions from sterilization facilities
R	Gasoline distribution facilities
T	Halogenated solvent cleaning
U	Group I polymers and resins
W	Epoxy resins production and non-nylon polyamides production
Y	Marine tank vessel loading operations
CC	Petroleum refineries
DD	Off-site waste and recovery operations
EE	Magnetic tape manufacturing operations
GG	Aerospace manufacturing and re-work facilities
HH	Oil and natural gas production
II	Shipbuilding and ship repair (surface coating)
JJ	Wood furniture manufacturing operations
KK	Printing and publishing industry
GGG	Pharmaceuticals production
HHH	Natural gas transmission and storage

4 -47

MACT Standards for VHAP Sources (40CFR63) continued

Subpart	Source Category
III	Flexible polyurethane foam production
JJJ	Group IV polymers and resins
MMM	Pesticide active ingredient production
OOO	Group III polymers and resins
PPP	Polyether polyols production
CCCC	Manufacturing nutritional yeast
GGGG	Solvent extraction for vegetable oil production
VVV	Boat manufacturing

4 -48

New Source Permit Programs

- (NSPS) New Source Performance Std.
 - Applies in Attainment & Non-attainment areas
- **New Source Review:**
 - (PSD) Prevention of Significant Deterioration
 - Attainment areas or Unclassifiable areas
 - Non-attainment New Source Review
 - Non-attainment areas

4 -49

New Source Performance Stds (NSPS)

- EPA sets “NSPS” for new sources that “**contribute significantly to air pollution.**”
 - 85 industrial categories identified (40 CFR Part 60)
 - <https://www.epa.gov/stationary-sources-air-pollution/new-source-performance-standards>
 - Applies in **attainment and non-attainment areas**
- NSPS are emission or performance standards
 - **new sources must meet standard once promulgated**
- NSPS sets emission limits by application of the “**best system of emission reduction**” (BSER).
 - “**costs**” are considered
- NSPS to be reviewed every 8 years.

CAA -50

New Source Performance Stds (NSPS)

- Cannot use *bubble* concept to define “source”
 - NSR (entire facility) uses annual emissions (tons/yr.)
 - NSPS (individual emission units) hourly emission rate (#/hr.)
- Includes modifications to existing sources
 - No increase in hourly emission rate (no *significant levels* used)
 - Exemptions: *routine maintenance & repair*, etc.
 - EPA 1992: “what is common in the industry”^{CAA-51}

NSPS for VOC Sources (40CFR60)

Subpart	Source Category
K	Storage vessels for petroleum liquids (constructed after June 11, 1973)
Ka	Storage vessels for petroleum liquids (constructed after May 18, 1978)
Kb	Volatile organic liquid storage vessels (constructed after July 23, 1984)
EE	Surface coating of metal furniture
MM	Automobile and light-duty truck surface coating operations
QQ	Graphic arts industry: Publication rotogravure printing
RR	Pressure sensitive tape and label surface coating operations
SS	Industrial surface coating: Large appliances
TT	Metal coil surface coating
VV	Equipment leaks of VOC in the SOCM
WW	Beverage can surface coating industry
XX	Bulk gasoline terminals
BBB	Rubber tire manufacturing industry
DDD	VOC emissions from the polymer manufacturing industry
FFF	Flexible vinyl and urethane coating and printing
GGG	Equipment leaks of VOC in petroleum refineries
HHH	Synthetic fiber production facilities
III	VOC emissions from the SOCM air oxidation unit processes
JJJ	Petroleum dry cleaners
KKK	Equipment leaks of VOC from onshore natural gas processing plants

NSPS for VOC Sources (Continued) (40CFR60)

Subpart	Source Category
NNN	VOC emissions from SOCM distillation operations
QQQ	VOC emissions from petroleum refinery wastewater systems
RRR	VOC emissions from SOCM reactor processes
SSS	Magnetic tape coating facilities
TTT	Industrial surface coating: Plastic parts for business machines
VVV	Polymeric coating of supporting substrates facilities
WWW	Municipal Solid Waste Landfills

4-53

Prevention of Significant Deterioration (PSD)


Rule:

In **attainment areas**, major new stationary sources and major modifications to existing major sources are subject to PSD program requirements.

4-54

PSD: Source

- Use “bubble theory” to define source
 - Total emissions from the entire plant instead of individual components:

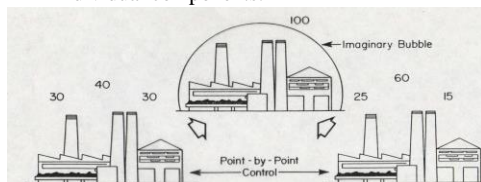

- entire plant includes:
 - Same SIC
 - Contiguous & adjacent property
 - Controlled by same person

CAA - 55

PSD: Major Source

- A PSD Major Source has the “potential to emit” a **regulated NSR pollutant** greater than or equal to:
 - 250 tons/year, or
 - 100 tons/year (if the source is one of the 28 source categories listed in CAA §169)

- | | |
|---|---|
| • 1. Fossil fuel-fired steam electric plants of more than 250 million Btu/hr heat input | • 15. Phosphate rock processing plants |
| • 2. Coal cleaning plants (with thermal dryers) | • 16. Coke oven batteries |
| • 3. Kraft pulp mills | • 17. Sulfur recovery plants |
| • 4. Portland cement plants | • 18. Carbon black plants (furnace plants) |
| • 5. Primary zinc smelters | • 19. Primary lead smelters |
| • 6. Iron and steel mill plants | • 20. Fuel conversion plants |
| • 7. Primary aluminum ore reduction plants | • 21. Sintering plants |
| • 8. Primary copper smelters | • 22. Secondary metal production plants |
| • 9. Municipal incinerators capable of charging more than 250 tons of refuse per day | • 23. Chemical process plants |
| • 10. Hydrofluoric acid plants | • 24. Fossil fuel boilers (or combinations thereof) totaling more than 250million Btu/hr heat input |
| • 11. Sulfuric acid plants | • 25. Petroleum storage and transfer units with a total storage capacity exceeding 300,000 barrels |
| • 12. Nitric acid plants | • 26. Taconite ore processing plants |
| • 13. Petroleum refineries | • 27. Glass fiber processing plants |
| • 14. Lime plants | • 28. Charcoal production plants |

4-56

Potential To Emit (PTE)

- PTE means the *maximum capacity* of a stationary source to emit any air pollutant under its physical and operational *design*.
 - Source operating 24 hours per day, 365 days per year, at maximum design and emission rates
- Can restrict PTE “*design limitation*” only if the limitation is “federally enforceable.” These include:
 - the use of air pollution control equipment
 - restrictions on hours of operation
 - restrictions on the type or amount of material combusted, stored, or processed

4-57

PSD: Major Modification

- **Major modification** ... is a change at an existing major source that causes a *“significant” emissions increase*.
 - “Significant” Emission increase for Ozone is a rate of emissions that would equal or exceed **40 tons/yr. of VOCs or NO_x**.
 - Add up all source emission increases & decreases 5 years before new construction begins (**Netting**).

4-58

PSD Permit Requirements

- Air Quality **Modeling**
 - Show that the background plus proposed source concentration does not exceed the Ozone NAAQS
- **BACT**: Best Available Control Technology
 - “Maximum degree of reduction achievable..”
 - “Costs” considered
 - More stringent than NSPS

4-59

BACT Determinations Steps

Step 1: Identify available pollution control options.

Step 2: Eliminate technically infeasible options.

Step 3: Rank controls by control effectiveness.

Step 4: Evaluate controls by cost and energy & environmental impacts.

Step 5: Make the BACT selection.

4-60

BACT Determination Example

- Control A: 60% efficient @ cost = \$50,000/yr.
- Control B: 90% efficient @ cost = \$60,000/yr.
- Control C: 94% efficient @ cost = \$90,000/yr.
- Control B would be BACT because it is the most *cost effective* for tons of pollutant removed.

4 -61

Non-attainment Preconstruction Review: *Rule*

In **non-attainment areas**, major new stationary sources and major modifications to *existing* major sources are subject to non-attainment new source review program requirements.

4 -62

Non-attainment Preconstruction:

- Source
 - Defined same as PSD
 - Use “bubble theory”
- Non-attainment area
 - Does not meet the NAAQS
 - Non-attainment “classification” changes:
 - What is a “major source”
 - What is a “major modification”

4 -63

Non-attainment: Major Source

- Potential to emit more than 100 tpy of any non-attainment (criteria or its precursors) pollutant, or
- Depends on non-attainment classification

Area Classification		PTE (tpy)
Ozone (either VOC or NO _x)	Marginal & Moderate	100
	Serious	50
	Severe	25
	Extreme	10

VOCs & NO_x are primary pollutant, precursors for the criteria pollutant, ozone, and therefore their emissions are regulated. 4-64

Non-attainment: Major Modification

Major modifications to existing major sources:

- An increase over “significant quantity”
- Depends on non-attainment classification:

Area Designation		Significant Quantity (tpy)
Ozone	Marginal & Moderate	40 (VOC or NO _x)
	Serious & Severe	25
	Extreme	0

4-65

Non-attainment Permit

- LAER: Lowest achievable emission rate
 - “Most stringent emission limitation .. achievable in practice” by similar sources
 - More stringent than “BACT”
- Company’s other sources must meet air regs
 - Same ownership and control
 - Same state
- Offset: take out more than you are putting in
 - Higher offsets as non-attainment classification increases.

4-66

Federal Offset Ratio

Area Classification		Offset Ratio
Ozone	Marginal	1.1 to 1
	Moderate	1.15 to 1
	Serious	1.2 to 1
	Severe	1.3 to 1
	Extreme	1.5 to 1

4-67

Title V

- 1990 CAAA created the Title V Operating Permit Program
- States (& locals) become the Title V permit authority upon approval by the EPA.
- Purpose of Title V Permit is to *specify all the CAA "applicable requirements" under one permit.*
- Major Stationary Sources are Required to Obtain a Title V Permit
 - Major sources are:
 - Any CAA air pollutant \geq 100 tons/yr. except GHGs
 - HAPs \geq 10 tons/yr (1 HAP) or 25 tons/yr (total HAPs)
 - NSR Permits: PSD & Nonattainment (including lower thresholds in nonattainment areas)

4-68

Title V Required Reporting

- **Deviation Reports:** Prompt reporting of any deviations from permit requirements (including upsets)
 - Must identify the cause of deviation & corrective actions and/ or preventive measures taken.
- **Semi-annual Reports** of any required monitoring
 - All deviations of permit requirements must be clearly identified (& certified by a "responsible official").
- **Annual Compliance Certification**
 - Statement of compliance from a "responsible official"
 - Must specify methods used to determine compliance (i.e. monitoring, recordkeeping, testing, etc.)

4-69

Interstate Transport of Pollution

- *Interstate transport of pollution can cause nonattainment of a NAAQS in a downwind state.*
- **CAA Section 184** established the “*Northeast Ozone Transport Commission*” (OTC) and to require states in the OTC to include in their SIPs regional planning measures to control VOC sources.
- **CAA Section 126** gives a state the authority to ask EPA to set emissions limits for specific sources of air pollution in other states that significantly contribute to nonattainment of NAAQS in the petitioning state.
 - This is another enforcement mechanism for EPA’s “Good Neighbor Provision”

4-70

Interstate Transport of Pollution

- **CAA Section 110(a)(D)(i)** establishes the “*Good Neighbor Provisions*” which requires a state SIP to include provisions that prevent their emission sources from “contribute significantly” to nonattainment of a NAAQS in a downwind state.
- On March 15, 2023, EPA issued its *Good Neighbor Plan*, which secures significant reductions in ozone-forming emissions of **NO_x** from power plants and industrial facilities from the 23 significantly contributing upwind states.
- On June 27, 2024, the U.S. Supreme Court granted a stay of the *Good Neighbor Plan* pending judicial review because EPA likely didn’t adequately respond to comments about the plan’s application.

4-71

Map of States Covered by the Final Good Neighbor Plan



4-72


Interstate Transport of Pollution

- 2005: EPA passed **Clean Air Interstate Rule (CAIR)** to limit the interstate transport of emissions of NO_x and SO_2 from power plants that contribute to fine particle matter ($\text{PM}_{2.5}$) and ozone in downwind states.
 - NO_x and SO_2 contributes to fine PM formation & NO_x contributes to O_3 formation.
- 2011 EPA replace CAIR with the **Cross State Air Pollution Rule (CSAPR)** to achieve emission reductions beyond those originally required by CAIR.
- Both rules required certain states to utilize **cap & trade programs** to limit annual NO_x and SO_2 emissions.
- Passed pursuant “*Good Neighbor Provision*” of CAA Section 110(a)(D)(i)

4-73

Cross State Air Pollution Rule States


CSAPR includes three separate cap and trade programs: the CSAPR SO_2 annual trading program, the CSAPR NO_x annual trading program, and the CSAPR NO_x ozone season trading program.

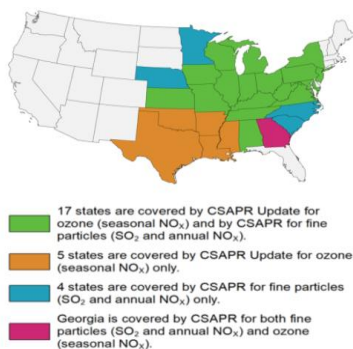

CSAPR States with Ozone Season NO_x Programs

Revised CSAPR Update for the 2008 Ozone NAAQS

On March 15, 2021, EPA finalized the Revised CSAPR. This rule will require additional emission reductions of NO_x from power plants in 12 states. It leaves unchanged the emission budget of the existing CSAPR NO_x Ozone Season Group 1 and Group 2 Trading Programs.

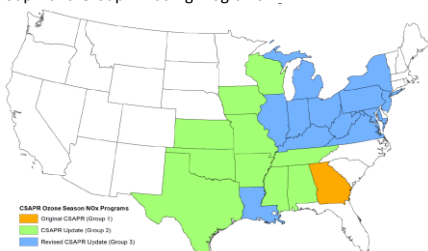

4-75

Chapter 5

Surface Coating

5 - 1

Surface Coating

The application of a wet or dry coating material to the surface of another material, either for decoration or for protection against damage or corrosion.

5 - 2

What is a Coating

- In general, coatings consist of:
 - Solids – include resins and pigments (color; metallics; corrosion protection, e.g., zinc chromate)
 - Water
 - VOCs
 - Exempt solvents
 - Other functional additives; e.g., UV inhibitors, drying agents
- Also, can be two-part coatings that form solids when mixed
 - Epoxies
 - Polyurethanes

5 - 3

Functions of Coatings

- Decorative
- Protective
 - Anti-scratch
 - Anti-corrosion
 - Anti-microbial
 - Waterproofing
- Magnetic
- Electrical
 - Conductive
 - Insulating
- Adhesive
- Change adhesion
- Optical
 - Reflective
 - Anti-reflective
 - UV-absorbent
 - Tinting
- Catalytic
- Light sensitive
- Scent

5 - 4

Coatings Composition

- Volatile Organic Compounds (VOCs) can be in coatings
 - Compounds with high vapor pressure
 - Many are human-made chemicals and used as industrial solvents
 - Some are chlorinated, e.g., trichloroethylene
 - Some are alcohols, e.g., isopropyl alcohol, methyl tert-butyl ether (MTBE)
 - Acetone, a common solvent, is exempt
 - Often products of petroleum refining, e.g., benzene, toluene, xylene
 - Many compounds containing fluorine and/or chlorine are exempt as minimally reactive
 - VOCs are emitted by a wide array of products, including:
 - paints and lacquers, paint strippers, cleaning supplies, pesticides, correction fluids, glues and adhesives, inks
 - Some VOCs are volatile organic hazardous air pollutants (VOHAPs) regulated under sections 112 and 129 of CAA^{5- 5}

Coating Composition

- Water
- Solvents exempt from the regulatory definition of VOC, include:
 - acetone
 - dimethyl carbonate
 - methyl acetate
 - parachlorobenzotrifluoride
 - tert-Butyl acetate
 - propylene carbonate
 - perchloroethylene

5 - 6

Process Description

- Surface preparation
- Coating application
- Drying or curing of coating

5 - 7

Surface Preparation

- Cleaning
- Acid etching
- Phosphate treatment
- Chromate conversion coating
- Drying

5 - 8

Types of Coatings

- Conventional
- High solids
- Waterborne
- Powder
- Radiation cured
- Plural

5 - 9

Conventional Coatings

- Use only organic solvents
- Coatings dry quickly
- Produce durable, high-quality surface
- Limited monomers and pre-polymers

5 - 10

Conventional Coatings Used in
Coil Coating

Coating	Volatile Content, Wt %
Acrylics	40% to 45%
Adhesives	70% to 80%
Alkyds	50% to 70%
Epoxies	45% to 70%
Fluorocarbons	55% to 60%
Phenolics	50% to 75%
Polyesters	45% to 50%
Silicones	35% to 50%
Vinyls	60% to 75%
Zincromet®	35% to 40%

5 - 11

Typical Solvent Content of
Conventional Coatings Used in
Various Industries

Industry	Coating	Volatile Content, vol %
Metal furniture	Not specified	65%
Automobile and light-duty truck	Enamel	67% to 76%
Automobile and light-duty truck	Lacquer	82% to 88%
Automobile refinishing	Enamel	72% to 76%
Automobile refinishing	Lacquer	87% to 91%
Large appliance	Not specified	70%
Traffic marking	Alkyd	50%

5 - 12

High-Solids Coatings

- Typically greater than 60% solids by volume
- Less drum handling
- Reduced freight costs
- Reduced solvent removal energy
- Increased viscosity

5 - 13

Emission Reductions for High-Solids Coatings

Coating	Emission Reduction %
60% solids by volume	61% to 62%
65% solids by volume	69%
70% solids by volume	75%
80% solids by volume	85%

5 - 14

Waterborne Coatings

- Contain 2-15% by volume organic solvent
- Types of waterborne coatings:
 - Water-soluble dispersions
 - Water-soluble polymers
 - Emulsions

5 - 15

Waterborne Coatings

- Wide range of formulations
- Can be used with high solids
- Easier clean up
- Increased drying energy
- Need better surface preparation
- Corrosion potential

5 - 16

Emission Reductions for Waterborne Coatings

Coating	Application Method	Emission Reduction, %
82/18 waterborne	Electrostatic spraying	80% to 82%
82/18 waterborne	Dip and flow coating	82%
82/18 waterborne	Electrodeposition	95%
67/33 waterborne	Electrostatic spraying	67%
67/33 waterborne	Dip and flow coating	67%

5 - 17

Powder Coatings

- Contain no solvent carrier
- Thermoplastic coatings melt when heated
- Thermosetting coatings polymerize
- Small quantities of VOC may be emitted during polymerization

5 - 18

Powder Coatings

- Better chemical and abrasion resistance
- Decreased curing energy
- Excess powder easily recovered
- Higher coating cost
- Limited number of formulations
- Higher capital equipment costs
- Higher temperatures required for curing
- Color mixing may occur during changes

5 - 19

Emission Reductions for Powder Coatings

Coating	Type	Emission Reduction, %
Epoxy	Thermosetting	97% to 99%
Acrylics	Thermosetting	99%
Urethane polyester	Thermosetting	96% to 98%
Polyester	Thermoplastic	99%
Acrylics	Thermoplastic	99%

5 - 20

Radiation-Cured Coatings

- Contain no solvent carrier
- Cures by polymerization with UV or electron beam radiation
- High line speeds
- Decreased operating cost
- Reduced floor space
- Higher coating cost
- Limited number of formulations
- Higher capital equipment costs
- Operational hazards

5 - 21

Coating Application

- Spray coating
- Dip coating
- Flow coating
- Roller coating
- Electrodeposition coating

5 - 22

Coating Application Methods
for Various Industries

Method	Coil Coating	Metal Furniture	Auto & Light Truck	Large Appliances
Air-atomized spray			X	X
Airless spray				X
Electrostatic spray		X	X	X
HVLP			X	
Electrostatic bell & disk				X
Dip		X		X
Flow		X		X
Roller	X			
Electrodeposition	X		X	X

5 - 23

Coating Application Methods
for Various Industries (cont'd)

Method	Can	Auto Refinish	Traffic Marking	Wood Bldg Products	Fabric
Air-atomized spray	X	X	X	X	X
Airless spray		X		X	X
Electrostatic spray		X		X	X
HVLP		X		X	X
Electrostatic bell & disk				X	X
Dip				X	X
Flow				X	
Roller	X			X	X
Electrodeposition					

5 - 24

Transfer Efficiency

Transfer efficiency = $\frac{\text{Solids applied to surface}}{\text{Total solids used}} \times 100$

5 - 25

Spray Coating

- Air atomized spray
- Airless spray
- Electrostatic spray
- High-volume, low-pressure (HVLP) spray
- Low-volume, low-pressure (LVLP) spray


5 - 26

Spray Coating

- Air atomized spray
- Airless spray
- Electrostatic spray
- High-volume, low-pressure (HVLP) spray
- Low-volume, low-pressure (LVLP) spray

5 - 27

Airless Spray Gun

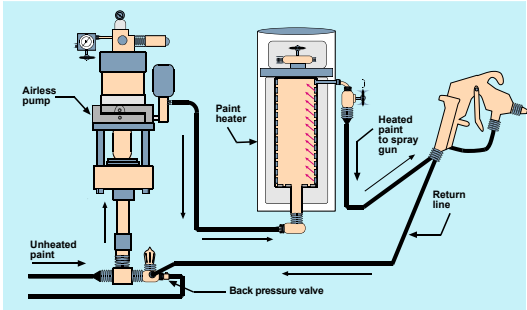


5 - 28

Spray Coating


- Air atomized spray
- Airless spray
- Electrostatic spray
- High-volume, low-pressure (HVLP) spray
- Low-volume, low-pressure (LVLP) spray

5 - 29


Electrostatic Bell

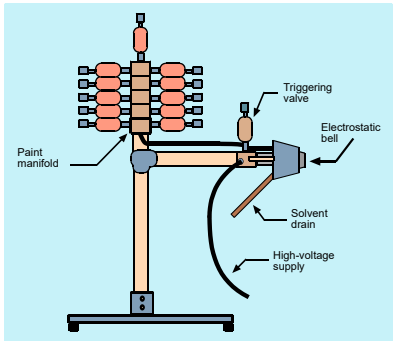


5 - 30

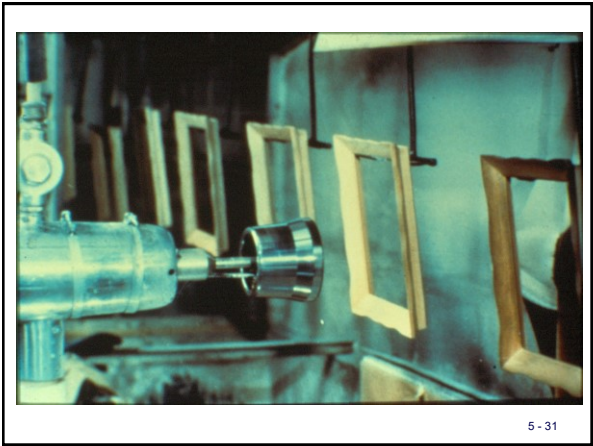

5 - 31

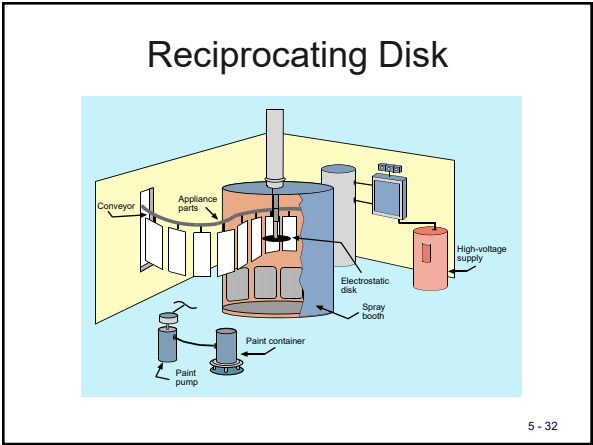

5 - 32

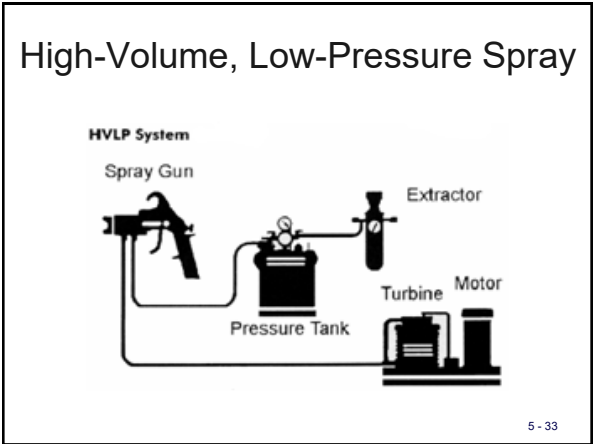

5 - 33

Spray Coating

- Air atomized spray
- Airless spray
- Electrostatic spray
- High-volume, low-pressure (HVLP) spray
- Low-volume, low-pressure (LVLP) spray

5 - 34

Transfer Efficiencies for Spray Application

Spraying Method	Flat Surface	Table-Leg Surface	Bird-Cage Surface
Air-atomized	50	15	10
Airless	75-80	10	10
Electrostatic air-atomized	75	65	65
Electrostatic airless	80	70	70
Electrostatic disk	95	90-95	90-95


5 - 35


DIP COATING




Transfer Efficiency 75% - 95%

5 - 36

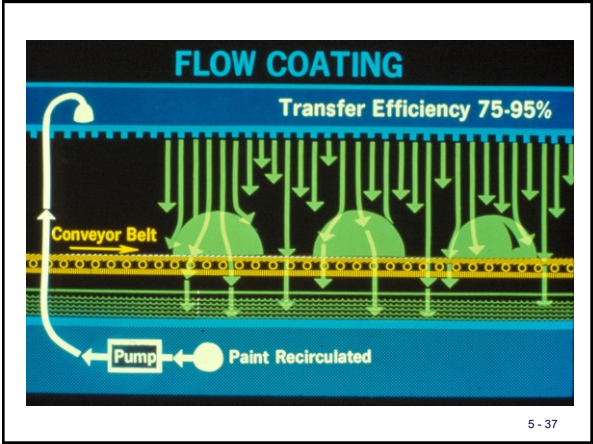

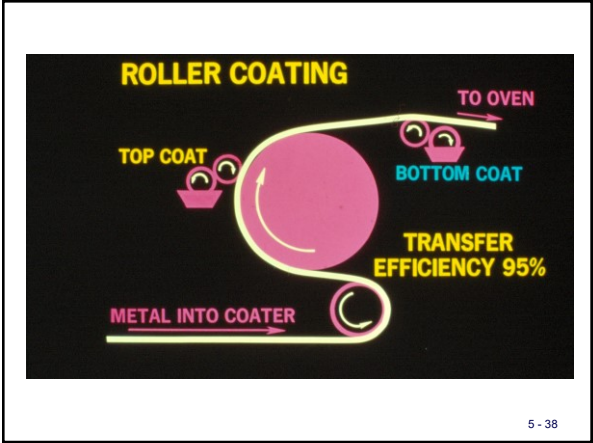

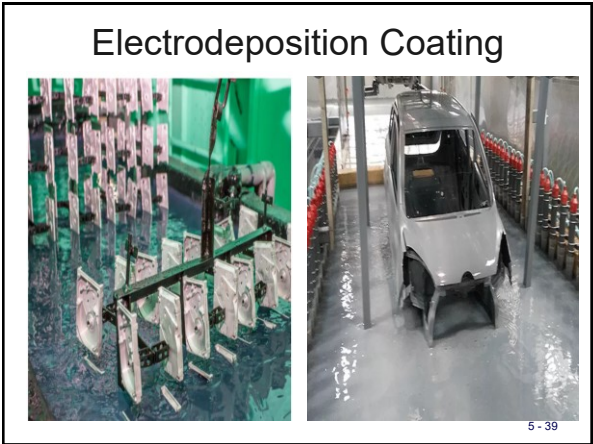

Curing

- Pre-drying
- Staged temperature ovens
- Explosion potential
- Cooling

5 - 40

Emission Control Techniques

- Reduced-VOC coating
- Higher transfer efficiency application
- Add-on control equipment

5 - 41

Percent of Total Emissions by Coating Step for Different Coating Methods

Coating Method	Application	Pre-Dry	Oven
Spray coating	30-50	10-30	20-40
Dip coating	5-10	10-30	50-70
Flow coating	30-50	20-40	10-30
Roller coating	0-5	10-20	60-80

5 - 42

Add-on Control Equipment

- It's generally assumed that all of the organic solvent in the coating will be emitted during the coating process.
- However, where in the coating process those solvents are evolved will depend on the application method.
- Based on these values, it is likely that a RACT level of control could be achieved for dip or roller coating by only controlling the oven.

5 - 43

Emission Regulations

5 - 44

Surface Coating of Large Appliances, Control Technique Guideline Document, EPA-450/2-77-034

Recommended standard:

An emission limit of 2.8 lbs of VOC

Standards of Performance for Industrial Surface Coating: Large Appliances, 40CFR60, Subpart SS

Applicability Date: December 24, 1980

Applicability Size: All

Standard:

An emission limit of 7.51 lbs of VOC per gallon of solids applied

5 - 45

Chapter 5: Surface Coating

Clean Air Act Guidelines and Standards for Solvent Use and Surface Coating Industry

The following are the stationary sources of air pollution for the solvent use and surface coating industries, and their corresponding air pollution regulations. To learn more about the regulations and guidelines for each industry, just click on the links below.

National Emission Standards for Hazardous Air Pollutants – NESHAP

New Source Performance Standards – NSPS

Control Techniques Guidelines - CTG

Alternative Control Techniques – ACT

National Volatile Organic Compound Emission Standards – 183(e) VOC Rule

Solvent Use and Surface Coating Stationary Sources Regulations

Industry	Regulations	Regulation/Guideline Type
Aerosol Coatings	National Volatile Organic Compound Emission Standards for Aerosol Coatings	Section 183(e) VOC Rules
Aerospace Surface Coating	Control of Volatile Organic Compound Emissions from Coating Operations at Aerospace Manufacturing and Rework Operations	CTG
Aerospace Surface Coating	Aerospace Manufacturing and Rework Facilities	NESHAP

Clean Air Act Guidelines and Standards for Solvent Use and Surface Coating Industry | US EPA 5 - 46

Process Inspection

- Review coating composition and consumption records
- Observe coating preparation
- Observe coating application
- Observe pre-drying area
- Observe curing area

5 - 47

Review Coating Composition and Consumption Records

- Composition data evaluated to determine compliance with permit and regulations
 - Solvent content
 - Solids content
 - Water content
 - Solvent density
 - Coating density
- Consumption data evaluated to determine compliance with permit

5 - 48

Observe Coating Preparation

- Determine if area is ventilated
- Note if drums are kept closed
- Determine if solvents have changed
- Observe spill cleanup
- Get sample of “as applied” coating

5 - 49

Observe Coating Application

- Determine if area is ventilated
- Note changes in application method
- Determine changes in application rate
- Determine if control system is adjusted
- Observe spill cleanup

5 - 50

Observe Pre-Drying Area

- Determine if area is ventilated
- Determine if control system is adjusted

5 - 51

Observe Curing Area

- Check physical integrity of oven
- Check oven temperatures
- Determine changes in line speed
- Determine if control system is adjusted

5 - 52

Chapter 6

Graphic Arts

6 - 1

Printing Operations

- Offset lithography
- Flexography
- Rotogravure
- Screen


6 - 2

Offset Lithography

- Uses a planographic printing surface
- Printing unit components:
 - Inking system
 - Dampening system
 - Plate cylinder
 - Blanket cylinder
 - Impression cylinder

6 - 3

Offset Lithography Printing Unit

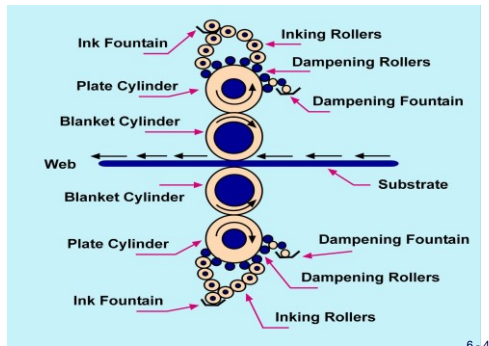

Offset Lithography Processes

- Non-heatset web printing
- Heatset web printing
- Sheetfed printing


6 - 5

Non-heatset Web Printing

- Prints on continuous web of paper
- Line speed 600-2100 fpm
- Uses semifluid inks
- Does not require heat for curing
- Fountain solution is >99.5% water and uses low volatility solvents

6 - 6

Non-heatset Web Printing Unit

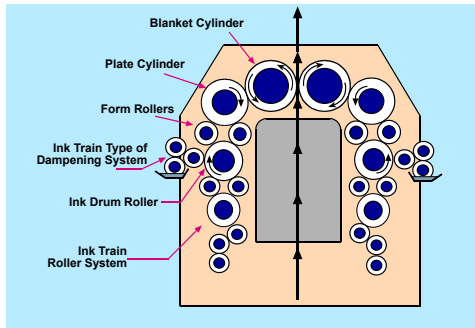


6 - 7

Heatset Web Printing

- Uses fluid inks that dry by evaporation
- Some inks cure by chemical reaction
- Typical dryer temperatures are 225-325°F
- 40-90% of ink solvent evaporates in dryer
- Fountain solution is 5-20% IPA or 2-5% low volatility solvents
- 0-5% of fountain solution solvent remains in web
- Automatic blanket washers evaporate solvent in dryer during wash cycle

6 - 8

Heatset Web Printing Press

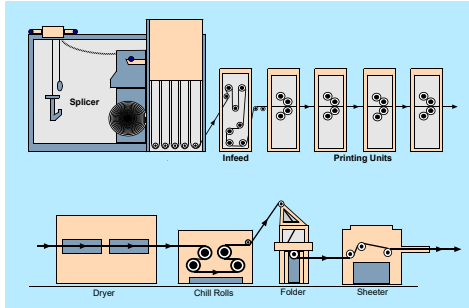

6 - 9

Sheetfed Printing

- Applies images to individual sheets
- Typically uses semifluid inks
- May use radiation curing inks
- Fountain solution is 5-20% IPA or 2-5% low volatility solvents
- Finishes are frequently applied

6 - 10



6 - 11

Emission Control Techniques

- Inks
- Fountain solution
- Press cleaning

6 - 12

Non-heatset Web Inks

- Formulated with low volatility solvents
- Guidelines suggest 5% of solvent emitted as fugitive emissions and 95% retained in paper
- Best control technique is ink reformulation

6 - 13

Heatset Web Inks

- Inks cure by evaporation in a dryer controlled with add-on equipment
- Guidelines suggest 80% of solvent is emitted in dryer and 20% retained in paper
- Control methods include incineration and condenser-droplet removal systems

6 - 14

Sheetfed Inks

- Formulated with low volatility solvents
- Guidelines suggest 5% of solvent emitted as fugitive emissions and 95% retained in paper
- Best control technique is ink reformulation

6 - 15

Fountain Solution

- Most volatile additive is IPA
- Use low volatility dampening agents
- Refrigerate fountain solution to 55-60°F
- For non-heatset and sheetfed printing, guidelines suggest 100% of solvent emitted as fugitive emissions
- For heatset printing, guidelines suggest 30% of solvent emitted as fugitive emissions and 70% emitted in dryer

6 - 16

Press Cleaning

- Reduce VOC content of cleaning solution
- Use less volatile solvents
- Add water and detergent to cleaning solution or use aqueous cleaner
- Put rags and wipes in sealed containers
- For heatset printers with automatic blanket washers, guidelines suggest 60% of solvent emitted as fugitive emissions and 40% emitted in dryer

6 - 17

Emission Regulations Draft
Recommendations

- Control of Volatile Organic Compound Emissions from Offset Lithographic Printing, Control Technique Guideline Document, EPA-453/D-95-001 Recommended standard:
- ☐ Reduce VOC emissions from the dryer of a heatset web press by 90%.
- ☐ Use fountain solutions in a nonheatset web press that contain less than 3% by volume of non-alcohol additives or alcohol substitutes.
- ☐ Use fountain solutions in a heatset web press that have VOC contents equivalent to less than 1.6% alcohol by volume.
- ☐ Use fountain solutions in a sheetfed press that have VOC contents equivalent to less than 5% alcohol by volume.
- ☐ Use cleaning solutions that have less than 30% by weight VOC.

6 - 18

Emission Regulations Draft Recommendations

- Additional Recommendations:
- ☐ An applicability cutoff of 15 pounds per day of actual VOC emissions without control devices for all printing activities (inks, coating, fountain solution and press cleaning).
- ☐ Use fountain solutions in all types of lithographic presses that contain less than 5% by volume of alcohol substitutes.
- ☐ Use blanket and ink roller cleaning solutions with a VOC composite partial vapor pressure less than 10 mm Hg at 20°C.
- ☐ Keep cleaning materials and used towels in closed containers


6 - 19

Flexography

- Uses raised image rubber printing plates
- Inks contain up to 75% solvent by weight
- Press designs:
 - Central impression
 - In-line
 - Stacked
 - Newspaper unit
 - Publication unit


6 - 20

Central Impression Press

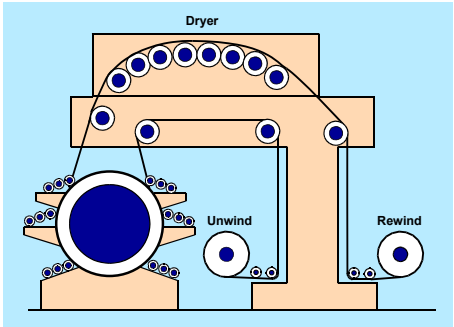

6 - 21


In-Line Press

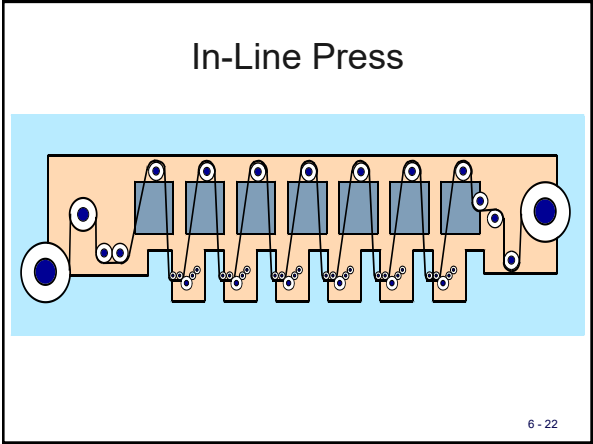

The diagram illustrates an in-line press printing unit. It features a horizontal arrangement of components. On the left, a large blue circle represents the ink supply. This is followed by a series of rollers and ink application mechanisms. The rollers are depicted as blue cylinders with white centers. The ink application mechanisms are shown as blue rectangular blocks with white circular openings. The entire unit is set against a light blue background.

6 - 22


Stack Press

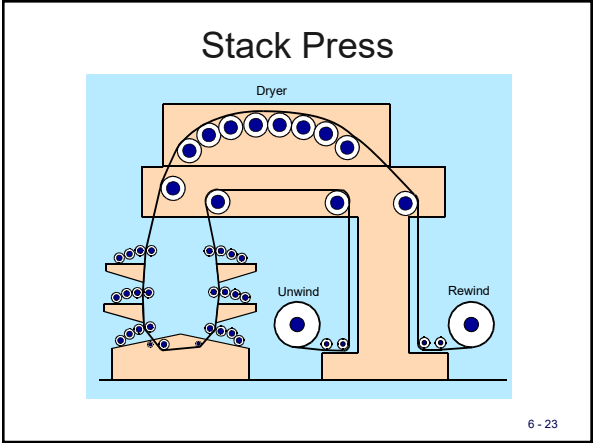

The diagram illustrates a stack press printing unit. It features a vertical arrangement of components. At the top, a blue circle represents the ink supply. Below it, a series of rollers and ink application mechanisms are shown. The rollers are depicted as blue cylinders with white centers. The ink application mechanisms are shown as blue rectangular blocks with white circular openings. The entire unit is set against a light blue background.

6 - 23


Newspaper Printing Unit

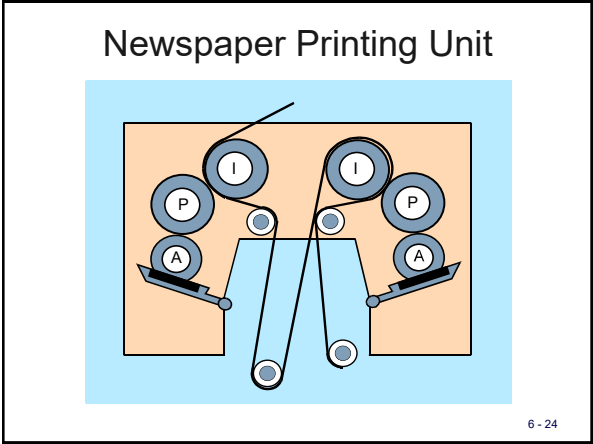

The diagram illustrates a newspaper printing unit. It features a complex arrangement of rollers and ink application mechanisms. The rollers are depicted as blue cylinders with white centers. The ink application mechanisms are shown as blue rectangular blocks with white circular openings. The entire unit is set against a light blue background.


6 - 24

Publication Printing Unit

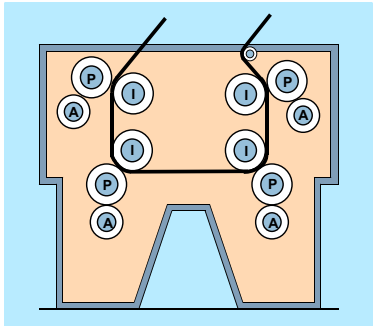


6 - 25

Fountain Roller Style
Printing Station

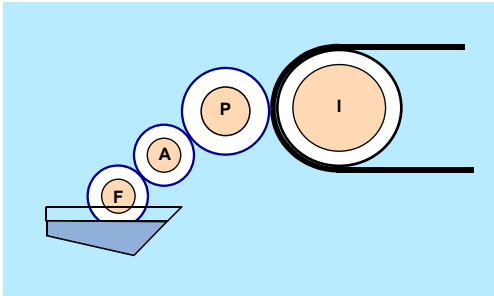



6 - 26


Single Doctor Blade Style
Printing Station

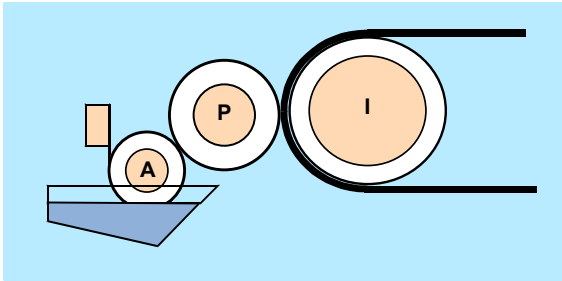

6 - 27

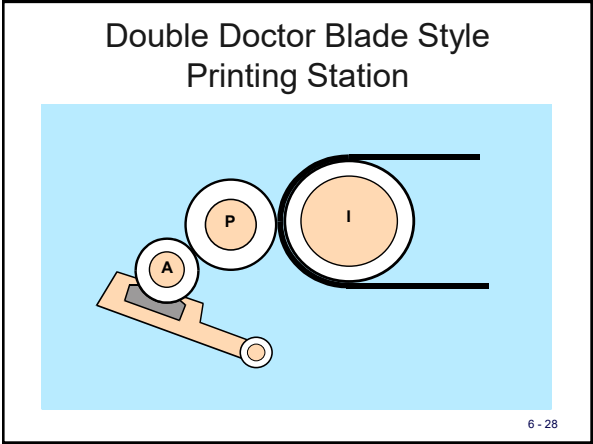

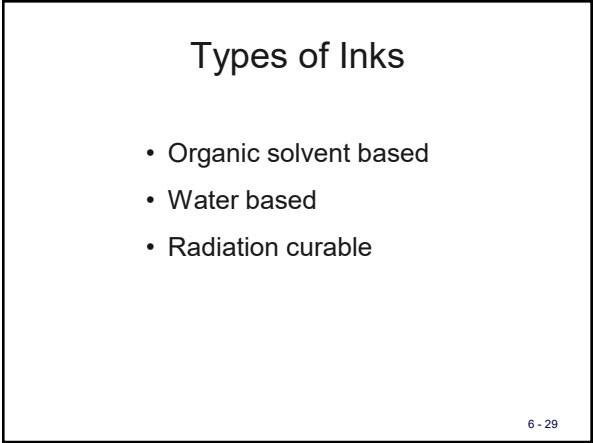

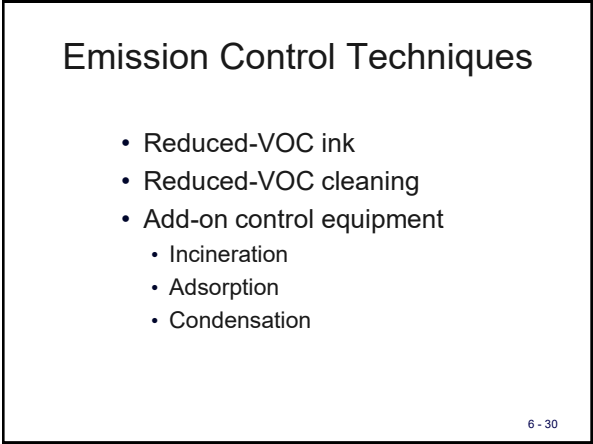

Emission Regulations Graphic Arts

- Control of Volatile Organic Emissions from Existing Stationary Sources-- Volume VIII: Graphic Arts--Rotogravure and Flexography, Control Technique Guideline Document, EPA-450/2-78-033 Recommended standard:
- ☐ Achieve an overall VOC reduction efficiency of 60%

6 - 31

Emission Regulations Graphic Arts

- National Emission Standards for the Printing and Publishing Industry, 40CFR63, Subpart KK Applicability: Each new and existing facility that is a major source of hazardous air pollutants (HAP) at which wide-web (>18 inches) flexographic printing presses are operated. Standard:
- ☐ Limit emissions to no more than 5% of the organic HAP applied for the month; or
- ☐ Limit emissions to no more than 4% of the total mass of inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, and other materials applied for the month; or
- ☐ Limit emissions to no more than 20% of the mass of solids applied for the month; or
- ☐ Limits emissions to a calculated equivalent allowable mass based on the organic HAP and solids contents of the inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, and other materials applied for the month.

6 - 32

Rotogravure

- Uses engraved chromium plated printing plates
- Inks contain up to 75% solvent by weight
- Industry branches:
 - Publication rotogravure
 - Packaging rotogravure
 - Product rotogravure

6 - 33

Rotogravure Press

6 - 34

Emission Control Techniques

- Reduced-VOC ink
- Reduced-VOC cleaning
- Add-on control equipment
 - Incineration
 - Adsorption
 - Condensation

6 - 35

Emission Regulations

- Control of Volatile Organic Emissions from Existing Stationary Sources-- Volume VIII: Graphic Arts-- Rotogravure and Flexography, Control Technique Guideline Document, EPA-450/2-78-033 Recommended standard:
 - ☐ Achieve an overall VOC reduction efficiency of 75% for publication rotogravure.
 - ☐ Achieve an overall VOC reduction efficiency of 65% for packaging rotogravure.
- Standards of Performance for the Graphic Arts Industry: Publication Rotogravure Printing, 40CFR60, Subpart QQ Applicability Date: October 28, 1980 Standard:
 - ☐ VOC emitted must be less than or equal to 16% of the total mass of VOC solvent and water used during any consecutive 30 day averaging period.

6 - 36


Emission Regulations

- National Emission Standards for the Printing and Publishing Industry, 40CFR63, Subpart KK Applicability: Each new and existing facility that is a major source of hazardous air pollutants (HAP) at which publication rotogravure or product and packaging rotogravure printing presses are operated. Standard: For publication rotogravure printing:
 - ☐ Limit emissions to no more than 8% of the total volatile matter used each month. For product and packaging rotogravure printing:
 - ☐ Limit emissions to no more than 5% of the organic HAP applied for the month; or
 - ☐ Limit emissions to no more than 4% of the total mass or inks, coatings, varnishes, adhesives, primers, solvents, reducers, thinners, and other materials applied for the month; or
 - ☐ Limit emissions to no more than 20% of the mass of solids applied for the month; or

Screen Printing

- Ink flows through screen with stencil bonded to it
- Types of inks:
 - Solvent based
 - Water based
 - UV curable
 - Plastisols

6 - 38

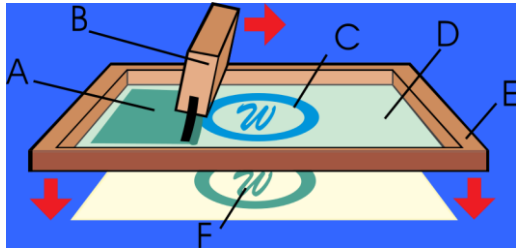

6 - 39

Drying Units

- Hot-air ovens
- Infrared radiation
- UV radiation

6 - 40

Screen Reclamation

- Ink residue removed
- Screen degreased
- Stencil remover applied
- Stencil removed with high-pressure wash
- Haze removers may be used

6 - 41

Emission Control Techniques

- Reduced-VOC ink
- Reduced-VOC cleaning
- Add-on control equipment
 - Incineration
 - Adsorption
 - Condensation

6 - 42

Process Inspection

- Review ink composition and consumption records
- Observe ink preparation
- Observe printing area
- Observe curing area

6 - 43

Review Ink Composition and Consumption Records

- Composition data evaluated to determine compliance with permit and regulations
 - Solvent content
 - Solids content
 - Water content
 - Solvent density
 - Ink density
- Consumption data evaluated to determine compliance with permit

6 - 44

Observe Ink Preparation

- Determine if area is ventilated
- Note if drums are kept closed
- Determine if solvents have changed
- Observe spill cleanup
- Get sample of “as applied” ink

6 - 45

Observe Printing Area

- Determine if area is ventilated
- Note changes in printing method
- Determine changes in application rate
- Determine if control system is adjusted
- Observe spill cleanup

6 - 46

Observe Curing Area

- Check physical integrity of oven
- Check oven temperatures
- Determine changes in line speed
- Determine if control system is adjusted

6 - 47

Chapter 7

Calculating the VOC
 Content of Coatings
 and Inks

7 - 1


VOC Calculations

Using the calculation method for
 determining VOC content of coatings and
 inks is more convenient, and often more
 reliable, than it is to measure VOC
 emission directly.

7 - 2

EPA Reference Methods 24 and 24A

- Properties and composition of coating or ink are needed to calculate surface coating VOC content for regulatory applicability or compliance determinations
- Data needed include:
 - Coating density
 - Solvent (VOC) density
 - VOC content, by weight or volume
 - Solids content, by weight or volume
 - Water content, by weight or volume



Calculation Information

- Form of emission limitation
- Data on the properties and compositions of coatings and inks
- Transfer efficiency and performance specifications
- Production rates and coating or ink usage

7 - 4

Forms of Emission Limitations
for Surface Coating

- Weight of VOC per volume of coating less water and exempt solvents
- Weight of VOC per area of surface covered
- Weight of VOC per volume of solids
- Weight of VOC per volume of applied solids

7 - 5

Forms of Emission Limitations
for Graphic Arts

- Volume percent VOC in volatile fraction
- Volume percent water in volatile fraction
- Volume percent solids in ink less water

7 - 6

Coating and Ink Data

- Standard methods
- Data sheets
- Material safety data sheets (MSDS)

7 - 7

Standard Methods

- Method 24
 - Weight fraction of volatile matter
 - Weight fraction of water
 - Volume fraction of solids
 - Coating density
- Method 24A
 - Weight fraction of VOC
 - Ink density
 - Solvent density

7 - 8

Method 24

- Method 24 is used to measure the volatile organic compound (VOC) content of coatings and inks and was developed for a variety of coating and printing source categories.
- Method 24 should only be applied to coating and printing type sources.
- Method does not provide step-by-step procedures for collection of the coating and ink samples; however, EPA does have a document entitled "Standard Procedure for Collection of Coating and Ink Samples for Analysis By Reference Method 24 and 24A" dated September 1991.

7 - 9

Method 24

- Method 24 references several American Society of Testing and Materials (ASTM) methods.
- The basic premise of Method 24 is an indirect measurement of the VOC content of Coatings. The non-volatile content of the coating is first determined by drying a known weight of coating and determining the amount of dry film left (this is the non-volatile portion).

7 - 10

Method 24

- The volatile fraction of sample (including water) is determined by subtracting the non-volatile portion from the initial weight of sample.
- Other ASTM methods are used to measure the amount of water and exempt solvents in the coating, and these values are subtracted from the volatile matter, leaving what is considered to be the amount of VOC's.
- Method 24 is conducted in the laboratory.

7 - 11

Method 24A

- This method is applicable for the determination of the VOC content and density of solvent-borne (solvent-reducible) publication rotogravure inks and related publication rotogravure coatings.
- Separate procedures are used to determine the VOC weight fraction and density of the ink or related coating and the density of the solvent in the ink or related coating.

7 - 12

Method 24A

- The VOC weight fraction is determined by measuring the weight loss of a known sample quantity which has been heated for a specified length of time at a specified temperature.
- The density of both the ink or related coating and solvent are measured by a standard procedure. From this information, the VOC volume fraction is calculated.

7 - 13

Material Safety Data Sheets

- The MSDS lists:
 - hazardous ingredients of a product
 - physical and chemical characteristics (e.g., flammability, explosive properties)
 - effect on human health
 - chemicals with which it can adversely react
 - handling precautions
 - types of measures used to control exposure
 - emergency and first aid procedures
 - methods to contain a spill.

7 - 14

Manufacturer Data Sheet

Coating Manufacturer _____
Coating Identification _____
Batch Identification _____
Supplied to _____

A. Coating Density (Dc) _____ Lbs/gal of coating

ASTM D 1475

Other

{ }

B. Total Volatile Content (Wv) _____ Lbs/lb of coating

ASTM D 2369

Other

{ }

C. Water Content (Ww) _____ Lbs/lb of coating

ASTM D 3792

ASTM D 4017

Other

{ }

Water Content (Vw) _____ Gals/gal of coating

Calculated

Other

{ }

D. Organic Volatiles (Wo) _____ Lbs/lb coating
E. Nonvolatiles Content (Vn) _____ Gals/gal of coating
F. VOC Content (VOC) _____ Lbs/gal less water

Lbs/gal of solids


Signed: _____ Date: _____

7 - 15

User Data Sheet

Coating Manufacturer	_____	
Coating Identification	_____	
Batch Identification	_____	
User	_____	
User's Coating Identification	_____	
A. Coating Density (Dc)	_____ Lbs/gal of coating	
	ASTM D 1475	{ }
	Other	{ }
B. Total Volatile Content (Wv)a	_____ Lbs/lb of coating	
	ASTM D 2369	{ }
	Other	{ }
C. Water Content (Ww)a	_____ Lbs/lb of coating	
	ASTM D 3752	{ }
	ASTM D 4017	{ }
	Other	{ }
Water Content (Vw)a	_____ Gal/gal of coating	
	Calculated	{ }
	Other	{ }
D. Dilution Solvent Density (Dd)	_____ Lbs/gal solvent	
(Weighted Average)	ASTM D 1475	
	Handbook	
	Formulation	
E. Dilution Solvent Ratio (Rd)	_____ Gal solvent/gal coating	
F. Organic Volatiles (Wvo)	_____ Lbs/lb coating	
G. Nonvolatiles Content (Vw)b	_____ Gal/gal of coating	
H. VOC Content (VOC)a	_____ Lbs/gal less water	
	_____ Lbs/gal of solids	
Signed: _____	Date: _____	

16

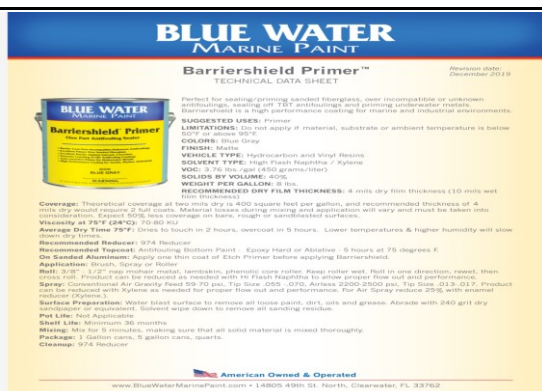

TDS-BW-BarrierShield-Primer-11-20-19.pdf

7.17

Environmental Data Sheets

ENVIRONMENTAL DATA SHEET (Certified Product Data Sheet)						Date of Preparation Oct. 16, 2001
PRODUCT NUMBER CERAT 1004						
PRODUCT NAME Cerata 1004 Resin Product						
MANUFACTURER'S NAME THE DREWS-WEAVER COMPANY 101 W. Prospect Avenue Cincinnati, OH 45216						
This document discloses all data required by all CERAT 80-1004 for a Certified Product Data Sheet under claims identified in all CERAT 80-1004. All data shown herein are MAXIMUM THEORETICAL VALUES based on the product AS SUPPLIED TO THE OPERATOR and not on intermediate values. MAXIMUM THEORETICAL VALUES are defined values. If provided, or the target value required for your supplier. Additionally, all data shown herein are MAXIMUM THEORETICAL VALUES and are not to be construed as unconditional guarantees or warranties. Statements shown herein are based on the best information available at the time of preparation of this document.						
Product Grouping (See SARAs 31-1-31-2)						
Chemical Weight 8.98 (g/ml) / Pounds (Ounces) 1.5 (lb) / 3.75 (oz)		Specific Gravity 1.2		FLAME POINT 17 °C (63 °F)		
Volatiles Ingredients						
Acetone Impurities	SARA 30-1-30-2	GERMOL	SARA 31-1-31-2	SARA 11-2	% by Weight	% by Volume
n-Butyl Acetate	N/A	N/A	N/A	N/A	0.0	0.0
n-Propyl Acetate	N/A	N/A	N/A	N/A	0.0	0.0
Volatile Organic Compounds - U.S. EPA / Canada						
Chemical Class						
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1004	1004	1004
Solvent Grouping	VOC	HAP	1004	1		

Coating and Ink Data

- Standard methods
- Data sheets
- Material safety data sheets (MSDS) (SDS)

7 - 19

What data is needed from the EDS or Technical Data Sheet?

Product Weight or Material Density: This is how much one gallon of the material weighs - it is not the VOC content.

Specific gravity: Sometimes used in place of material density for liquids, this dimensionless number compares the material's density to the density of water. A specific gravity less than 1.0 means the material is less dense (lighter) than water; greater than 1.0 means the material is more dense (heavier) than water.

Product Weight 9.75 lb/gal	Specific Gravity 1.17	FLASH POINT 103 °F PMOC
Hazard Category (for SARA 311,312) (Acute Chronic Fire)		
Volatile Ingredients		
Chemical Compound	SARA 302 EHS	CERCLA
Mineral Spirits 64742-88-7	N	N
Ethylbenzene 100-41-4	Y	Y

CAS number, unique to each

This column identifies ingredients that are HAPs, per Section 112 of the Clean Air Act, and shows ethylbenzene is a HAP, while mineral spirits is not.

7 - 20

Physical/Chemical Properties Section of the EDS contains

Exempt solvents: Listed are any compounds that are excluded from the definition of VOC. Water is not organic and is the only exempt solvent in this formulation.

Total Volatiles: This number, typically expressed as % by weight or % by volume, represents how much of the material evaporates. It typically includes water; all VOCs, and exempt solvents combined.

Volatile Organic Compounds (follows U.S. EPA VOC Data Sheet)			
A. Coating Density	9.75 lb/gal	1168 g/l	
B. Total Volatiles	28.1 % by wt.	42.2 % by vol.	
C. Federally exempt solvents	Water	0.3 % by wt.	0.4 % by vol.
D. Organic Volatiles		27.8 % by wt.	41.9 % by vol.
E. Percent Non-Volatile		71.9 % by wt.	57.8 % by vol.
F. VOC Content	2.71 lb/gal 325 g/l	less exempt solvents	
1. 2.72 lb/gal 326 g/l		of solids	
2. 4.60 lb/gal 562 g/l		of solids	
3. 0.38 lb/lb 0.38 kg/kg		of solids	

VOC content, total: Typically expressed as pounds of VOC per gallon (lb VOC/gal) or grams per liter (g/l). This is the number needed for VOC emission calculations.

VOC content, less exempt solvents: This is the value needed to determine if the coating complies with a regulatory formulation limit, e.g., 3.5 lb VOC/gallon. It is not used for emission calculations.

7 - 21

Transfer Efficiency

- Baseline transfer efficiencies are specified in some CTG documents and NSPS
- Enhanced transfer efficiencies are determined under actual operating conditions

7 - 22

Capture and Control Efficiencies

- Claimed efficiencies can be determined from manufacturer's information
- Actual efficiencies are determined by performance testing on the specific source

7 - 23

Process Records

- Coating formulation and analytical data
- Coating consumption data
- Capture and control equipment performance data
- Transfer efficiency data
- Process information

7 - 24

Emission Calculations

Consider the following coating:

Solids content	35% by weight
Water content	10% by weight
Solids density	29.7 lbs/gal
Solvent content	83.3% xylene
(by volume)	16.7% MEK

7 - 25

How much coating is needed to do a particular job?

- The same volume of coating solids must be deposited on an object to coat it to a desired film thickness regardless of the type of coating or volatile organic compound content of the coating used. Solids make the film. Volatiles (VOC, water, and non-photochemically reactive solvents) evaporate.

7 - 26

How much coating is needed to do a particular job?

- Four gallons of a 25 percent by volume (v/o) solids coating must be used to get one gallon of coating solids.



7 - 27

- But, only two gallons of a 50 v/o solids coating must be used to get one gallon of coating solids.

VOC
Solids

- This means that twice as much work can be done with a gallon of 50 v/o solids coating than with a gallon of 25 v/o solids coating. Twice as many gallons of 25 percent solids coating are needed than gallons of 50 percent solids coating to do the same job.

7 - 28

- Comparisons of the percent difference in emissions between two, coatings, or between a coating and an emission limit, must be done on a solids basis.
- Each gallon of the 25 v/o solids coating contains 5.5 pounds of VOC.

5.5 lbs VOC
Solids

7 - 29

- So, for each gallon of coating solids, 22.0 pounds of VOC are emitted.
- $\frac{5.5 \text{ pounds VOC}}{\text{gallon coating}} \times \frac{4 \text{ gallons coating}}{\text{gallon of solids}}$
- Each gallon of the 50 v/o solids coating contains 3.7 pound of VOC

3.7 lbs VOC
Solids

7 - 30

- So, for each gallon of coating solids, 7.4 pounds of VOC are emitted.
- $\frac{3.7 \text{ pounds VOC}}{\text{gallon coating}} \times \frac{2 \text{ gallons coating}}{\text{gallon of solids}}$
- Thus, emissions from the 50 v/o solids coatings are 66 percent less than from the 25 v/o solids coating when providing an equal amount of solids to the process.

7 - 31

- $\frac{22.0 - 7.4}{22.0} = 0.66$
- 22.0
- What emission reduction is needed to meet an emission limit?
- This calculation, which must also be done on a solids basis, is the same as that used above to compare emissions, from two different coatings.
- A coater who uses a 25 v/o solids coating containing 5.5 pounds of VOC per gallon, less water, must reduce emissions by 66 percent to meet an emission limit of 3.7 pounds of VOC per gallon, less water.

7 - 32

How much do improvements in transfer efficiency help a source to comply?

- The coater may want to use a coating that does not comply with a regulation and compensate by improvements in the transfer efficiency with which the coating is applied to meet an equivalent emission level. In order to calculate credit for VOC reductions which result from improvements in transfer efficiency, calculations should be done using units of:
- 1b VOC/gallon solids deposited.

7 - 33

Transfer Efficiency Calculations

- These units are determined by dividing 1b VOC/gallon solids by the transfer efficiency expressed as a decimal fraction. For example, if the starting transfer efficiency is 60 percent, the units would be:
- $$\frac{\text{lb VOC}}{\text{gal solids deposited (with the old system)}} = \frac{\text{lbs VOC}}{\text{gallon Solids (in coating used)}} \times \frac{1 \text{ gal. solids in coating used}}{0.6 \text{ gal solids deposited}}$$

7 - 34

Transfer Efficiency Calculations

- If the same paint were now to be sprayed with 90 percent transfer efficiency, the new value
- $$\frac{\text{lb VOC}}{\text{gal solids deposited (with new system)}} = \frac{\text{lbs VOC}}{\text{gallon Solids (in new coating used)}} \times \frac{1 \text{ gal. solids in coating used}}{0.9 \text{ gal solids deposited}}$$

7 - 35

Transfer Efficiency Calculations

- If both the sol vent content of the coating and the transfer efficiency are changed, the situation becomes:
- $$\frac{\text{lb VOC}}{\text{gal solids deposited (with new paint and new transfer efficiency)}} = \frac{\text{lb VOC}}{\text{gal solids in new coating used}} \times \frac{1.0 \text{ gal solids in new coating used}}{T \times \text{gallon solids deposited}}$$
- where T the new transfer efficiency expressed as a decimal

7 - 36

Calculation of Mixed Solvent Density

A coating that is 35 weight percent solids and 10 weight percent water. The solids density is 29.7 lbs/gal, and the density of water is 8.34 lbs/gal. The composition of the organic solvent is 83.3 volume percent xylene and 16.7 volume percent MEK.

$$\left(7.5 \frac{\text{lbs xylene}}{\text{gal xylene}}\right) \left(0.833 \frac{\text{gal xylene}}{\text{gal solvent}}\right) = 6.25 \frac{\text{lbs xylene}}{\text{gal solvent}}$$

$$\left(6.7 \frac{\text{lbs MEK}}{\text{gal MEK}}\right) \left(0.167 \frac{\text{gal MEK}}{\text{gal solvent}}\right) = 1.11 \frac{\text{lbs MEK}}{\text{gal solvent}}$$

$$\begin{aligned} \text{Solvent density} &= 6.25 \frac{\text{lbs xylene}}{\text{gal solvent}} + 1.11 \frac{\text{lbs MEK}}{\text{gal solvent}} \\ &= 7.36 \frac{\text{lbs solvent}}{\text{gal solvent}} \end{aligned}$$

7 - 37

Calculation of Coating Density

Solvent content = 100 lbs coating - 35 lbs solids - 10 lbs water = 55 lbs

$$\frac{35 \text{ lbs solids}}{29.7 \frac{\text{lbs solids}}{\text{gal solids}}} = 1.18 \text{ gal solids}$$

$$\frac{10 \text{ lbs water}}{8.34 \frac{\text{lbs water}}{\text{gal water}}} = 1.20 \text{ gal water}$$

$$\frac{55 \text{ lbs solvent}}{7.36 \frac{\text{lbs solvent}}{\text{gal solvent}}} = 7.47 \text{ gal solvent}$$

7 - 38

**Calculation of Coating Density
 (Continued)**

1.18 gal solids + 1.20 gal water + 7.47 gal solvent = 9.85 gal coating

$$\text{Coating density} = \frac{100 \text{ lbs coating}}{9.85 \text{ gal coating}} = 10.15 \frac{\text{lbs coating}}{\text{gal coating}}$$

Coating composition by volume:

Solids	12.0%
Water	12.2%
Solvent	75.8%

7 - 39

Calculation of VOC Emissions
 on the Basis of Coating Volume

$$\text{Emissions} = \left(7.36 \frac{\text{lbs solvent}}{\text{gal solvent}} \right) \left(0.758 \frac{\text{gal solvent}}{\text{gal coating}} \right) = 5.58 \frac{\text{lbs solvent}}{\text{gal coating}}$$

$$\text{Emissions} = \left(0.55 \frac{\text{lbs solvent}}{\text{lb coating}} \right) \left(10.15 \frac{\text{lbs coating}}{\text{gal coating}} \right) = 5.58 \frac{\text{lbs solvent}}{\text{gal coating}}$$

7 - 40

Calculation of VOC Emissions
 on the Basis of Coating Volume
 (Continued)

$$1 \frac{\text{gal coating}}{\text{gal coating}} - 0.122 \frac{\text{gal water}}{\text{gal coating}}$$

$$\frac{1 \text{ gal coating} - 0.122 \text{ gal water}}{\text{gal coating}}$$

$$\frac{(1 - 0.122) \text{ gal coating less water}}{\text{gal coating}}$$

7 - 41

Calculation of VOC Emissions
 on the Basis of Coating Volume
 (Continued)

$$\text{Emissions} = \frac{\left(7.36 \frac{\text{lbs solvent}}{\text{gal solvent}} \right) \left(0.758 \frac{\text{gal solvent}}{\text{gal coating}} \right)}{\frac{(1 - 0.122) \text{ gal coating less water}}{\text{gal coating}}} = 6.35 \frac{\text{lbs solvent}}{\text{gal coating less water}}$$

7 - 42

Calculation of VOC Emissions
on the Basis of Solids Volume

$$\text{Emissions} = \frac{\left(7.36 \frac{\text{lbs solvent}}{\text{gal solvent}}\right) \left(0.758 \frac{\text{gal solvent}}{\text{gal coating}}\right)}{0.12 \frac{\text{gal solids}}{\text{gal coating}}} = 46.49 \frac{\text{lbs solvent}}{\text{gal solids}}$$

or

$$\text{Emissions} = \frac{\left(0.55 \frac{\text{lbs solvent}}{\text{lb coating}}\right) \left(10.15 \frac{\text{lbs coating}}{\text{gal coating}}\right)}{0.12 \frac{\text{gal solids}}{\text{gal coating}}} = 46.52 \frac{\text{lbs solvent}}{\text{gal solids}}$$

7 - 43

Calculation of VOC Emissions
on the Basis of Solids Volume
(Continued)

Assume a transfer efficiency of 75%:

$$\text{Emissions} = \frac{46.49 \frac{\text{lbs solvent}}{\text{gal solids}}}{0.75 \frac{\text{gal solids applied}}{\text{gal solids}}} = 61.99 \frac{\text{lbs solvent}}{\text{gal solids applied}}$$

7 - 44

Graphic Arts Calculations

Consider the following ink:

- Solids content 10% by volume
- Water content 70% by volume
- Solvent content 20% by volume

45

Volume Percent VOC
 in the Volatile Fraction

$$\text{VOC content} = \frac{0.20 \frac{\text{gal solvent}}{\text{gal ink}}}{(1 - 0.10) \frac{\text{gal volatiles}}{\text{gal ink}}} = 0.222 \frac{\text{gal solvent}}{\text{gal volatiles}} \text{ or } 22.2\% \text{ of the volatiles}$$

7 - 46

Volume Percent Water
 in the Volatile Fraction

$$\text{Water content} = \frac{0.70 \frac{\text{gal water}}{\text{gal ink}}}{(1 - 0.10) \frac{\text{gal volatiles}}{\text{gal ink}}} = 0.778 \frac{\text{gal water}}{\text{gal volatiles}} \text{ or } 77.8\% \text{ of the volatiles}$$

7 - 47

Volume Percent Solids
 in the Ink Less Water

$$\text{VOC content} = \frac{0.10 \frac{\text{gal solids}}{\text{gal ink}}}{(1 - 0.70) \frac{\text{gal ink less water}}{\text{gal ink}}} = 0.333 \frac{\text{gal solids}}{\text{gal ink less water}} \text{ or } 33.3\%$$

7 - 48

Calculating emissions (lbs/hr) of individual HAP's

- Data needed:
- 1) topcoat: product density = 8.5 lbs/gal, 5% wt xylene, 8% wt MIBK from EDS
- 2) reducer: product density = 7.5 lbs/gal, 10% wt xylene, 20% wt toluene from EDS
- 3) mix ratio = 4 gallons topcoat to 1 gallon reducer
- 4) mixed coating application rate = 2.5 gallons/hour
-

7 - 49

Calculating emissions (lbs/hr) of individual HAP's

Xylene content of mixed coating:

$$\frac{(8.5 \text{ lbs/gal} \times 0.05 \times 4 \text{ gal}) + (7.5 \text{ lbs/gal} \times 0.10 \times 1 \text{ gal})}{4 \text{ gal} + 1 \text{ gal}} = 0.49 \text{ lb xylene/gal}$$

Toluene content of mixed coating:

$$\frac{(7.5 \text{ lbs/gal} \times 0.20 \times 1 \text{ gal})}{4 \text{ gal} + 1 \text{ gal}} = 0.30 \text{ lb toluene/gal}$$

MIBK content of mixed coating:

$$\frac{(8.5 \text{ lbs/gal} \times 0.08 \times 4 \text{ gal})}{4 \text{ gal} + 1 \text{ gal}} = 0.54 \text{ lb MIBK/gal}$$

7 - 50

Calculating emissions (lbs/hr) of individual HAP's

Xylene emissions: $0.49 \text{ lbs/gal} \times 2.5 \text{ gal/hr} = 1.23 \text{ lbs/hr xylene}$

Toluene emissions: $0.30 \text{ lbs/gal} \times 2.5 \text{ gal/hr} = 0.75 \text{ lb/hr toluene}$

MIBK emissions: $0.54 \text{ lbs/gal} \times 2.5 \text{ gal/hr} = 1.35 \text{ lbs/hr MIBK}$

7 - 51

Large Appliance Coating Line Using Several Types of Spray Equipment

- A large appliance manufacturer has a coating operation that employs electrostatic and manual spray coating equipment. The following data are available regarding operation. Determine the compliance status and what percent reduction is required to achieve compliance.

7 - 52

Large Appliance Coating Line Using Several Types of Spray Equipment

	(A) Electrostatic coating	(B) Manual coating
Transfer efficiency, percent	90	40
Average volume percent of solids in coating	39	39
VOC content, lb VOC/gal coating less water	4.5	4.5
Gallons of coating used per day	30.4	47.1
Emission limit, lb/gallon less water	2.8	2.8
Baseline transfer efficiency for large appliances, percent	60	60

The baseline transfer efficiency is 60 percent for a large appliance coater. Table 3 is a tabulation of the available data and calculation results. The actual calculations follow.

7 - 53

Large Appliance Coating Line Using Several Types of Spray Equipment

TABLE 3. LARGE APPLIANCE MULTITRANSFER EFFICIENCY CALCULATION.

Spray type	Gallons of coating/day	Solids, vol. %	Lb VOC/gallon coating	Lb VOC/gallon solids	% TE	Lb VOC/gallon solids applied	Gallons of solids applied/day	Pounds of VOC/day
Actual emissions								
A	30.4	39	4.5	11.5	90	12.8	10.7	136.8
B	47.1	39	4.5	11.5	40	28.8	7.3	212.0
Total								348.8
Allowed emissions								
A	28.8	62	2.8	4.5	60	7.5	10.7	80.6
B	19.6	62	2.8	4.5	60	7.5	7.3	54.9
Total								135.5

7 - 54

Large Appliance Coating Line Using Several Types of Spray Equipment

Under the actual emissions category, the following calculations can be made.

For A and B, the mass of VOC per volume of solids is:

$$\frac{4.5 \text{ lb VOC}}{\text{gal coating}} \times \frac{1 \text{ gal coating}}{0.39 \text{ gal solids}} = \frac{11.5 \text{ lb VOC}}{\text{gal solids}}$$

For A, the mass of VOC per volume of solids applied is:

$$\frac{4.5 \text{ lb VOC}}{\text{gal coating}} \times \frac{1 \text{ gal coating}}{0.39 \text{ gal solids}} \times \frac{1 \text{ gal solids}}{0.90 \text{ gal solids applied}} = \frac{12.82 \text{ lb VOC}}{\text{gal solids applied}}$$

For B, the mass of VOC per volume of solids applied is:

$$\frac{4.5 \text{ lb VOC}}{\text{gal coating}} \times \frac{1 \text{ gal coating}}{0.39 \text{ gal solids}} \times \frac{1 \text{ gal solids}}{0.40 \text{ gal solids applied}} = \frac{28.85 \text{ lb VOC}}{\text{gal solids applied}}$$

7 - 55

Large Appliance Coating Line Using Several Types of Spray Equipment

For A, the volume of solids applied per day is:

$$\frac{30.4 \text{ gal coating}}{\text{day}} \times \frac{0.39 \text{ gal solids}}{\text{gal coating}} \times \frac{0.90 \text{ gal solids applied}}{\text{gal solids used}} = \frac{10.7 \text{ gal solids applied}}{\text{day}}$$

For B, the volume of solids applied per day is:

$$\frac{47.1 \text{ gal coating}}{\text{day}} \times \frac{0.39 \text{ gal solids}}{\text{gal coating}} \times \frac{0.40 \text{ gal solids applied}}{\text{gal solids used}} = \frac{7.3 \text{ gal solids applied}}{\text{day}}$$

7 - 56

Large Appliance Coating Line Using Several Types of Spray Equipment

For A, the mass of VOC emissions per day is:

$$\frac{4.5 \text{ lb VOC}}{\text{gal coating}} \times \frac{30.4 \text{ gal coating}}{\text{day}} = \frac{136.8 \text{ lb VOC}}{\text{day}}$$

For B, the mass of VOC emissions per day is:

$$\frac{4.5 \text{ lb VOC}}{\text{gal coating}} \times \frac{47.1 \text{ gal coating}}{\text{day}} = \frac{212.0 \text{ lb VOC}}{\text{day}}$$

Under the allowed emissions category, the following calculations can be made

For A and B, the volume fraction of VOC in the baseline coating is:

$$\frac{2.8 \text{ lb VOC}}{\text{gal coating}} \times \frac{1 \text{ gal VOC}}{7.36 \text{ lb VOC}} = \frac{0.38 \text{ gal VOC}}{\text{gal coating}}$$

7 - 57

Large Appliance Coating Line Using Several Types of Spray Equipment

The volume fraction solids in the coating is:

$$1 - \frac{0.38 \text{ gal VOC}}{\text{gal coating}} = \frac{0.62 \text{ gal solids}}{\text{gal coating}}$$

The baseline mass of VOC per volume solids is:

$$\frac{2.8 \text{ lb VOC}}{\text{gal coating}} \times \frac{1 \text{ gal coating}}{0.62 \text{ gal solids}} = \frac{4.5 \text{ lb VOC}}{\text{gal solids}}$$

For A and B, the maximum allowable emissions are:

$$\frac{2.8 \text{ lb VOC}}{\text{gal coating}} \times \frac{1 \text{ gal coating}}{0.62 \text{ gal solids}} \times \frac{1 \text{ gal solids used}}{0.60 \text{ gal solids applied}} = \frac{7.5 \text{ lb VOC}}{\text{gal solids applied}}$$

7 - 58

Large Appliance Coating Line Using Several Types of Spray Equipment

The volume of solids applied remains the same. Therefore, for A, the gallons of complying coating used per day would be:

$$\frac{10.7 \text{ gal solids applied}}{\text{day}} \times \frac{1 \text{ gal coating}}{0.62 \text{ gal solids}} \times \frac{1 \text{ gal solids used}}{0.6 \text{ gal solids applied}} = \frac{28.8 \text{ gal coating}}{\text{day}}$$

For B, the gallons of complying coating used per day would be:

$$\frac{7.3 \text{ gal solids}}{\text{day}} \times \frac{1 \text{ gal coating}}{0.62 \text{ gal solids}} \times \frac{1 \text{ gal solids used}}{0.6 \text{ gal solids applied}} = \frac{19.6 \text{ gal coating}}{\text{day}}$$

7 - 59

Large Appliance Coating Line Using Several Types of Spray Equipment

For A, the mass of VOC emissions allowed per day is:

$$\frac{2.8 \text{ lb VOC}}{\text{gal coating}} \times \frac{28.8 \text{ gal coating}}{\text{day}} = \frac{80.6 \text{ lb VOC}}{\text{day}}$$

For B, the mass of VOC emissions allowed per day is:

$$\frac{2.8 \text{ lb VOC}}{\text{gal coating}} \times \frac{19.6 \text{ gal coating}}{\text{day}} = \frac{54.9 \text{ lb VOC}}{\text{day}}$$

The total actual VOC emissions from A and B are 348.8 lb VOC per day. The total allowable VOC emissions are 135.5 lb VOC per day. Therefore, the operation is out of compliance. To achieve compliance, the required reduction in emissions is:

$$\frac{348.8 - 135.5}{348.8} \times 100 = 61 \text{ percent}$$


7 - 60


Chapter 8

Petroleum Refining

Wellhead Pump



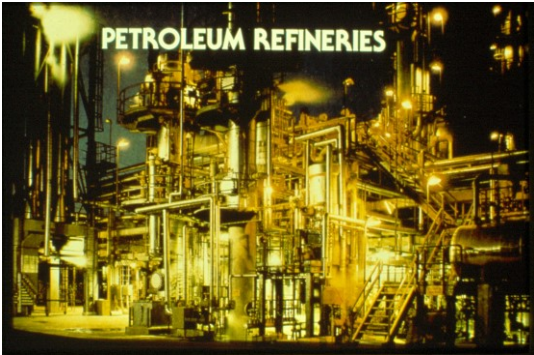

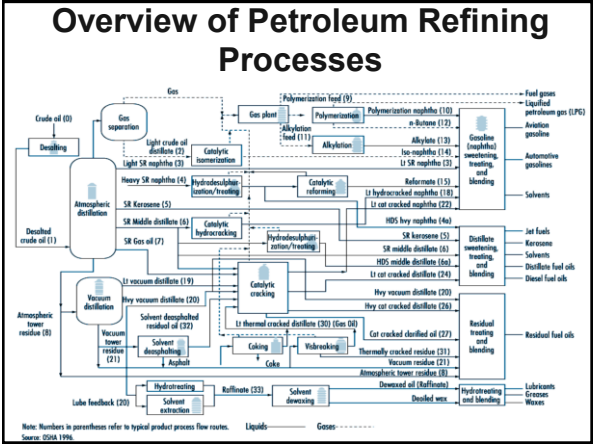




Categories of Refining Operations


- Separation processes
- Conversion processes
- Treatment processes
- Formulating and Blending
- Auxiliary processes

Chapter 8: Petroleum Refining

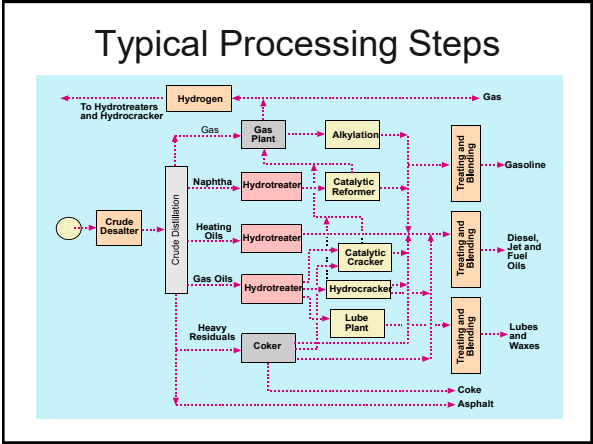


Separation Processes

- Desalting
- Distillation
- Deasphalting

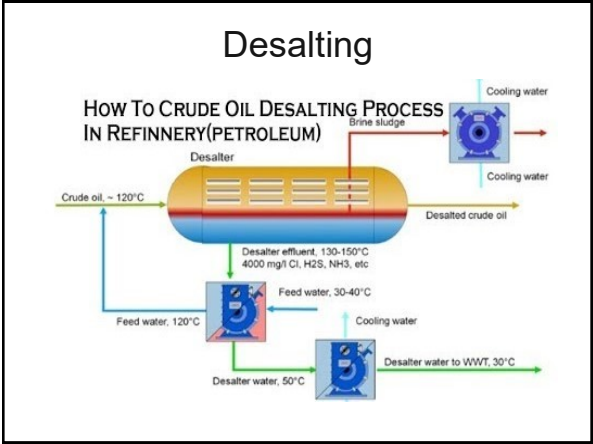

Electrostatic Dehydrator and Desalter

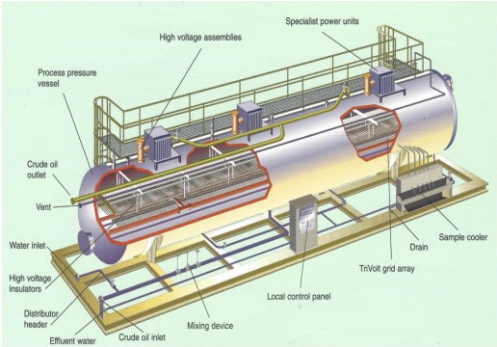


<https://howe-baker.com/oil-treatment/>

Distillation


- Atmospheric distillation
- Vacuum distillation

Atmospheric Distillation Unit

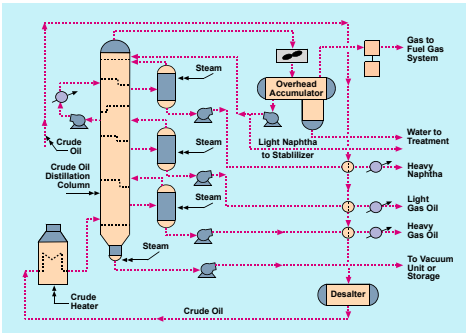


Chapter 8: Petroleum Refining


Vacuum Distillation

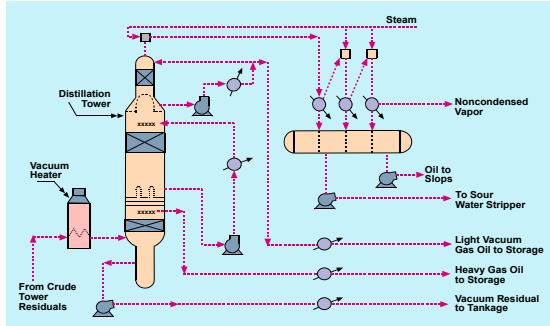

Petroleum Distillation Tower and Fractionation Information

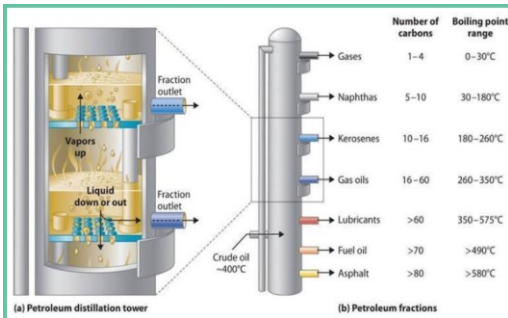

Hydrotreating

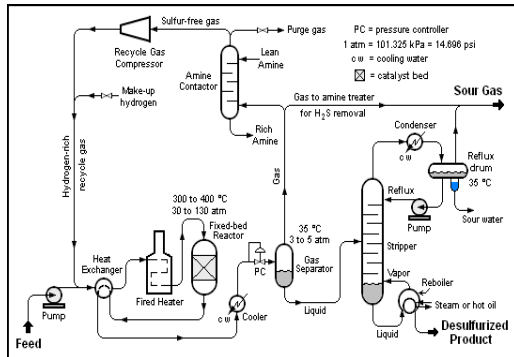


Deasphalting

Separates asphaltic compounds using liquid-liquid extraction with liquid propane

Conversion Processes


- Coking
- Visbreaking
- Catalytic cracking
- Polymerization
- Alkylation
- Isomerization
- Reforming

Delayed Coking Unit

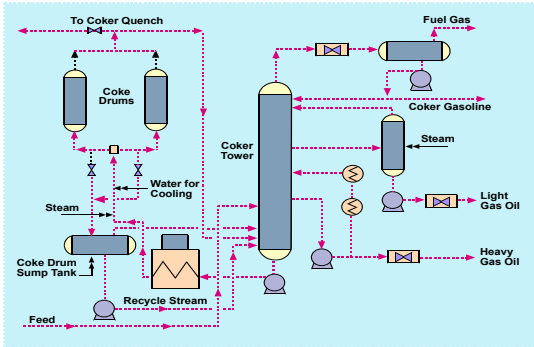

Chapter 8: Petroleum Refining


Delayed Coking Unit Schematic Flow Diagram

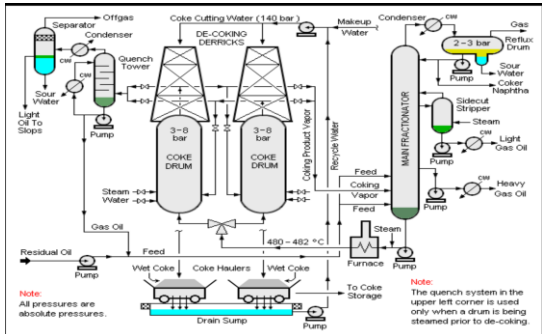


Visbreaking

- Milder form of cracking than coking
- Residues from atmospheric and vacuum distillation fed to process heater
- Thermal cracking produces residual tars, gas oils, gasoline and light gases
- Used to reduce viscosity of residual fractions for blending into fuel oils

Catalytic Cracking Unit

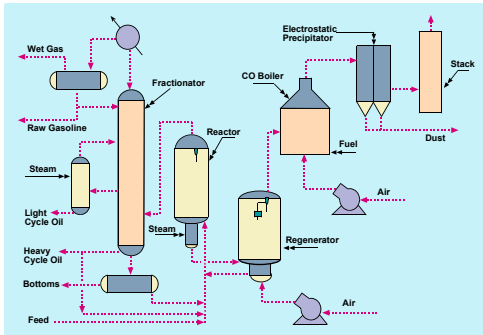

Chapter 8: Petroleum Refining

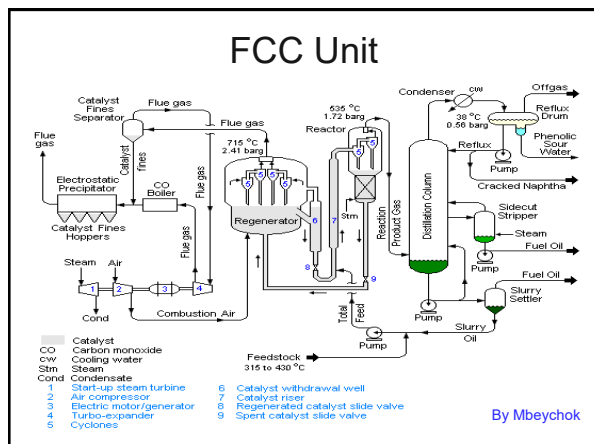

FCC Internal Cyclones



Polymerization

- Catalytic conversion of olefin gases to liquid condensation products
- Provided a gasoline blending stock when octane level were low
- Rarely used today
- Polymers are valuable as additives for motor oil

Alkylation

- Branched hydrocarbons are synthesized by the catalytic addition of a paraffinic or aromatic hydrocarbon to an olefin
- The product, alkylate, is used as an antiknock additive

Isomerization

- Rearranges feedstock molecular structure to produce branched-chain compounds from straight-chain compounds
- Process is usually applied to butane or mixtures of pentane and hexane

Reforming

- Converts straight-chain naphtha compounds to ring or branched structures
- Predominate use is the dehydrogenation of naphthenes to form aromatics

Treatment Processes

- Hydrotreating
- Amine treating
- Chemical sweetening
- Asphalt blowing

Hydrotreating

- Removes sulfur, nitrogen and metal compounds from intermediate fractions
- In hydrodesulfurization, the petroleum stream is mixed with hydrogen and passed over a fixed-bed catalyst
- Reactor effluent is separated to recover the hydrogen and the hydrogen sulfide and ammonia


Amine Treating

- Removes acid impurities, mainly hydrogen sulfide and carbon dioxide, from intermediate fractions
- Petroleum stream is contacted with an aqueous amine solution in a tray or packed tower
- Spent amine solution is processed to regenerate the scrubbing solution and producing a concentrated acid-gas stream

Chemical Sweetening

- Sweetens distillates by extraction or conversion of mercaptans
- In conversion process, sour feed is sparged with air and passed over a fixed-bed catalyst wetted by caustic solution
- In extraction process, sour feed is contacted with caustic solution in a packed tower. Spent caustic is regenerated and mercaptans recovered as alkyl disulfides

Asphalt Blowing

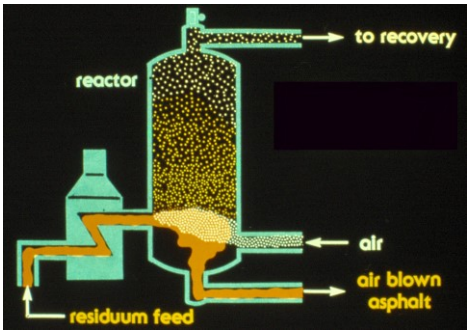

Auxiliary Processes

- Sulfur recovery
- Wastewater treatment
- Fuel gas recovery
- Blowdown systems

Sulfur Recovery

- Sulfur compounds in petroleum fractions are converted into hydrogen sulfide by treatment processes
- Hydrogen sulfide is collected and converted to elemental sulfur, usually with a Claus process

Wastewater Treatment

- Specific design of system varies
- Systems generally include:
 - Drain systems
 - Oil-water separators
 - Air flotation units
- Additional treatment may involve secondary and tertiary processes

Fuel Gas Recovery

- Recovers hydrocarbon vapors from various refinery processes
- Collected gases are compressed, condensed and separated into constant vapor pressure mixtures
- Recovered mixtures used as refinery fuel or feedstock or sold

Blowdown Systems

- Provides for safe disposal of liquid and gaseous hydrocarbons from pressure-relief devices
- Blowdown is separated into liquid and vapor fractions and recycled or flared

Emission Control Techniques

- Flares
- Incinerators
- Process heaters
- Covers
- Fugitive emission control

Flares

There several different types of flares, but the most common is the elevated steam-assisted flare. They are designed and operated to handle large fluctuations in flow rate and VOC content are



Well Operating Flare - High Combustion Efficiency



Poorly Operating Over Steam Flare - Low Combustion Efficiency

Enclosed Refinery Flare



Flare Efficiency Alert



EPA Enforcement Targets Flaring Efficiency Violations

Comment

Purpose

EPA is drawing significant environmental resources to carrying regulatory responsibilities at this time. This study is intended to reflect on the current state of control of air pollution and to identify those areas in proper EPA operation. EPA hopes this will allow an improvement of the operating strategy, including better control and monitoring of superemission gas, acid, and nitrate, and thereby harmful conditions in the environment. Better EPA operation will have the potential to reduce the following:

- (1) Reducing emissions of toxic air pollutants that may pose a health risk;
- (2) Reducing visible organic compound emissions which will in turn reduce the formation of ozone which is potentially harmful in vulnerable populations including the young, elderly, and those with respiratory problems. Moreover, improving their combustion efficiency can result in cost savings that can be reduced state usage.

Industrial

Chemical and petroleum facilities generate waste gases that need to be controlled safely, economically, and in a manner that protects the public health and the environment. The last major facilities to be gridded in pollution control prediction to minimize the emission of waste gases, such as EPA's October 2008 Enforcement Alert, <http://www.epa.gov/gap/combinedemissions/combinedemissions101008letter.html>.

Because not all waste gases can be prevented or minimized, some control technologies are used to reduce the impact of these waste streams on the environment. One such technology is flaring. A flare is a mechanical device used to control and destroy atmospheric emissions of toxic compounds and other pollutants to reduce and/or other industrial uses.

- Tested and operated with no visible emissions under 1500 ft. Modified aircraft for periods not to exceed 7 minutes to 1 hour.
- Operated with a flame spread at all times, confirmed by a flame spread test.
- Used only where the accelerating velocity of the gas is not considered to be 100 ft./min. per standard cubic foot (111 ft./min. for the 1500 ft. test) or less.
- Used only where the flame is non-luminous.
- Designed and operated with an air velocity, less than 50 ft. per second (167 ft./min.) and air velocity not greater than 50 ft./min. but less than 400 ft./min. and must be used if the hot burning velocity of the gas being tested is less than 400 ft./min.

Flow Diagram Characteristics

Flares are specifically designed to combust gases. Most flares employ steam or air to promote mixing of oxygen with the inert gas to ensure combustion occurs without smoke.

There are many parameters that affect the combustion efficiency of a flare. One important parameter is the heating value of the gases that are to be combusted, often measured in BTU/lb. The heating value is a measure of the combustibility of the gas. Generally, it is easier to maintain a stable flame and achieve high efficiency for gas streams with higher heat values.

Parameters for

Properly Designed and Operated Flares

Report for Flare Review Panel
April 2012

Prepared by
U.S. EPA Office of Air Quality Planning and Standards (OAQPS)

This information is distributed solely for the purpose of pre-dissemination peer review under applicable information quality guidelines. It has not been formally disseminated by EPA. It does not represent and should not be construed to represent any Agency determination or policy.

Incinerators – Thermal Oxidizers

- Thermal and Catalytic Incinerators – TO's
- Destruction Efficiencies up to 95% - 99%
- Not well suited to streams with highly variable flow
- Supplementary fuel typically required
- Fuel requirements may be reduced by energy recovery

Process Heaters

- Can be used to control emission streams if gas stream > 150 Btu/SCF
- Typically can oxidize VOC's > 98%
- Gas stream must not reduce the heaters performance or reliability
- Not suitable for gas streams with varying flows or heating value (high or low)
- Not suitable for corrosive gas streams


Covers

- Emissions from wastewater drains can be reduced 40% to 50% by either a physical cover at ground level or a U-tube water seal in the drain pipe.
- Junction boxes can also be controlled with covers, equipped with a vent pipe.
- Fixed or floating roof covers on oil-water separators can control emissions ranging from 85% to 98% efficiency.
- Covering components in the wastewater system, can be enclosed and vented to a control device.

Fugitive Emission Control

- Control with preventive maintenance and housekeeping.
- Having an effective inspection and training program
- Have an effective (timely repair) Leak Detection and Repair LDAR program (typically mandatory)

Chapter 8: Petroleum Refining

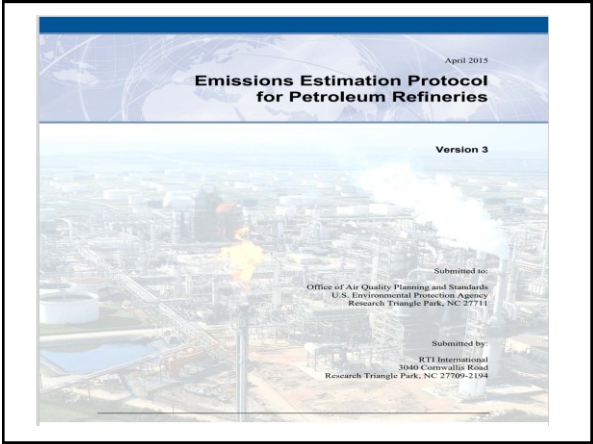

Example from Refinery Emissions Protocol

Example 4-2: Calculation of Fuel-Specific F Factor

The CEMS measures SO₂ and O₂ content on a dry basis, so in lieu of using a default F factor, the facility can use fuel analysis results and Equation 4-2 to calculate an F₄ factor (scf/MMBtu). The F₄ factor is calculated at standard conditions of 20°C (68°F) and 29.92 inches of mercury.

The fuel analysis revealed the following mole fractions:

Methane	0.44	Propene	0.03
Ethane	0.04	Butane	0.17
Hydrogen	0.06	Butene	0.01
Ethene	0.01	Inerts	0.04
Propane	0.2		

Equation 4-2 is used to calculate F₄ as follows:

$$F_4 = K \times [(X_{CH_4} \times MEV_{CH_4}) + (X_{C_2H_6} \times MEV_{C_2H_6}) + (X_{H_2} \times MEV_{H_2}) + (X_{C_3H_8} \times MEV_{C_3H_8}) + (X_{C_4H_{10}} \times MEV_{C_4H_{10}}) + (X_{C_2H_4} \times MEV_{C_2H_4}) + (X_{C_3H_6} \times MEV_{C_3H_6}) + (X_{C_4H_8} \times MEV_{C_4H_8}) + (X_{C_4H_{10}} \times MEV_{C_4H_{10}})] + [(X_{CH_4} \times MHC_{CH_4}) + (X_{C_2H_6} \times MHC_{C_2H_6}) + (X_{H_2} \times MHC_{H_2}) + (X_{C_3H_8} \times MHC_{C_3H_8}) + (X_{C_4H_{10}} \times MHC_{C_4H_{10}}) + (X_{C_2H_4} \times MHC_{C_2H_4}) + (X_{C_3H_6} \times MHC_{C_3H_6}) + (X_{C_4H_8} \times MHC_{C_4H_8}) + (X_{inerts} \times MHC_{inerts})]$$
$$F_4 = 10^6 \times [(0.44 \times 7.28) + (0.04 \times 12.94) + (0.06 \times 1.61) + (0.01 \times 11.34) + (0.2 \times 18.61) + (0.03 \times 17.01) + (0.17 \times 24.28) + (0.01 \times 22.67) + (0.04 \times 0.85)] + [(0.44 \times 842) + (0.04 \times 1475) + (0.06 \times 269) + (0.01 \times 1335) + (0.2 \times 2100) + (0.03 \times 1947) + (0.17 \times 2717) + (0.01 \times 2558) + (0.04 \times 0)]$$
$$= 10^6 \times 12.55 = 1425$$
$$= 8,809 \text{ dscf/MMBtu}$$

Process Inspection



Petroleum Refinery Sector Rule (Risk and Technology Review and New Source Performance Standards)

On this page:

- [Rule Summary](#)
- [Rule History](#)
- [Additional Resources](#)
- [Compliance](#)

Rule Summary

In December 2015, the EPA issued a final rule that will further control toxic air emissions from petroleum refineries and provide important information about refinery emissions to the public and neighboring communities. This rule will virtually eliminate smoking flare emissions and upset emission events, and will require refineries to monitor emissions at key emission sources within their facilities and around their fence lines. When fully implemented in 2018, this rule will result in a reduction of 5,200 tons per year of toxic air pollutants, and 50,000 tons per year of volatile organic compounds (VOC).

July 3, 2018 - EPA proposed to extend the compliance dates finalized in July 13, 2016, for maintenance vent standards that apply during periods of startup, shutdown, maintenance or inspection for sources constructed or reconstructed on or before June 30, 2014. The compliance date would change from August 1, 2017 to January 30, 2019. This proposed compliance date extension would provide petroleum refinery owners and operators with an additional 18 months to achieve compliance.

<https://www.epa.gov/stationary-sources-air-pollution/petroleum-refinery-sector-rule-risk-and-technology-review-and-new>

Basic Information

Federal Register Citations:

- [81 FR 70550](#)
- [81 FR 71861](#)
- [81 FR 65332](#)
- [81 FR 6814](#)
- [80 FR 75178](#)
- [79 FR 30880](#)

Code of Federal Regulations Citations

- [40 CFR Part 61 Subpart J](#)
- [40 CFR Part 61 Subpart Ja](#)
- [40 CFR Part 61 Subpart Cc](#)
- [40 CFR Part 61 Subpart UUu](#)

Docket Number

- [EPA-HQ-OAR-2016-0982](#)

Petroleum Refinery Fenceline Monitoring Requirement Schedule

Milestones	Dates
Refineries install fenceline monitoring systems	Present – January 29, 2018
Refineries begin collecting data <ul style="list-style-type: none">Collect 12 months of data to calculate annual average	January 30, 2018
Refineries report data to EPA's emissions data system <ul style="list-style-type: none">Refineries continue to report data on quarterly basisRefineries compare annual average to 9 micrograms per cubic meter	Spring 2019
EPA public release of benzene data on web page 30 days after quarterly reporting period ends <ul style="list-style-type: none">Data will be refreshed quarterly on EPA's public web page	Summer 2019

Fenceline Monitoring – Monitor Siting

- ▶ 12-24 monitors (based on size of facility) are required around the perimeter of each refinery
- ▶ Additional monitors required if sources are near fenceline
- ▶ Monitors will be placed following requirements in EPA Method 325A
- ▶ Geographic coordinates for each monitoring location will be reported

Fenceline Monitoring – Data Collection

- ▶ At least one sample collected from each individual monitoring location every two weeks
 - ▶ Samples analyzed for benzene following requirements in EPA Method 325B
 - ▶ The highest and lowest benzene concentration is identified for each biweekly sampling period
 - ▶ The “delta C (ΔC)” for that monitoring period is calculated as the difference of these two concentrations
 - ▶ 26 consecutive bi-week ΔC values are averaged to calculate an annual average ΔC value
 - ▶ Collect benzene data for one year to develop first annual average ΔC value

Fenceline Monitoring – Data Reporting

- ▶ Upon completion of the first year of monitoring, benzene data are reported to EPA through EPA’s data management system
- ▶ Includes actual measurements for each 2 week period for each monitoring station
- ▶ Refinery owners must maintain the annual average ΔC value at or below 9 micrograms per cubic meter, $\mu\text{g}/\text{m}^3$ (2.8 parts per billion by volume, ppbv)

Method 325A

Air Emission Measurement Center (EMC)

[CONTACT US](#) [SHARE](#)

- EMC Home
- Test Methods
 - Promulgated Methods
 - Approved Alternatives
 - Conditional Methods
 - Other Methods
- Monitoring
 - Performance Specifications
 - QA Procedures
 - Continuous Emission Monitoring
 - Metals and Hg Emissions Monitoring
- Instructional Material
 - Guideline Documents
 - Information Documents

Method 325A – Volatile Organic Compounds from Fugitive and Area Sources: Sampler Deployment and VOC Sample Collection

Do you have questions about a Test Method, Performance Specification or Source Category? Find the EMC contact for your question in the [EMC Directory](#).

You may need a PDF reader to view some of the files on this page. See EPA’s [about PDF page](#) to learn more.

- [Method 325A Volatile Organic Compounds from Fugitive and Area Sources: Sampler Deployment and VOC Sample Collection 1-14-2019 \(PDF\)](#) (16 pp, 441 K)

Method 325B

Air Emission Measurement Center (EMC)

CONTACT US

SHARE

EMC Home

Test Methods

Promulgated Methods

Approved Alternatives

Conditional Methods

Other Methods

Monitoring

Performance Specifications

QA Procedures

Continuous Emission Monitoring

Metals and Hg Emissions Monitoring

Instructional Material

Guideline Documents

Information Documents

Technical Support

Method 325B - Volatile Organic Compounds from Fugitive and Area Sources: Sampler Preparation and Analysis

Do you have questions about a Test Method, Performance Specification or Source Category? Find the EMC contact for your question in the [EMC Directory](#).


You may need a PDF reader to view some of the files on this page. See EPA's [about PDF page](#) to learn more.

Method 325B - Volatile Organic Compounds from Fugitive and Area Sources: Sampler Preparation and Analysis 1-14-2012

[\(PDF\)](#) (47 pp, 615 K)

[Contact Us](#) to ask a question, provide feedback, or report a problem.

Remote Sensing for Measurement and Monitoring of Emissions Flux of Gases and Particulate Matter

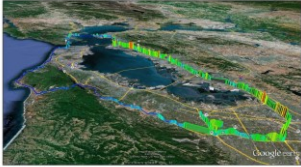

Informational Document

This informational document describes the emerging technologies that can measure and/or identify pollutants using state of the science techniques

EPA 454/B-18-008 August 2018

United States Environmental Protection Agency

Environmental Topics

Laws & Regulations

About EPA

Search EPA.gov

Related Topics: Stationary Sources of Air Pollution

CONTACT US

SHARE

Comprehensive Data Collected from the Petroleum Refining Sector

On This Page

Overview

Information Collection Request (ICR) Component 1 Data - Questionnaire on Processes and Controls

Information Collection Request (ICR) Component 2 Data - Emission Inventory

Information Collection Request (ICR) Component 3 Data

Information Collection Request (ICR) Component 4 - Emission Source Testing

Information Collection Request (ICR) Components 1-4 Raw Data

Overview


On April 1, 2011 the EPA sent a comprehensive industry-wide information collection request (ICR) to all facilities in the U.S. petroleum refining industry. The ICR was designed to collect information on processing characteristics, crude slate, emission inventories, and limited source testing to fill known data gaps. The template for the ICR letter sent to the refineries and the general instructions for the ICR are available [here](#), in the [docket folder](#), at [regulations.epa](#) or at [https://efsa.epa.gov/icr2011](#).

The ICR consists of four components: 1) a questionnaire to be completed by all petroleum refineries and submitted by May 31, 2011; 2) an emissions inventory to be developed by all petroleum refineries and submitted by June 30, 2011; 3) distillation feed sampling and analysis to be conducted by all petroleum refineries and submitted by August 31, 2011; and 4) emissions testing, to be completed in accordance with an EPA-approved protocol, for 88 selected emission sources located at specific refineries by August 31, 2011.

The EPA has received this ICR data and compiled these data into databases and spreadsheets. A number of different public parties have requested the ICR data; therefore, as a way to continue our commitment to transparency, the EPA is making the following non-CBI data files available to the public. These datasets will be used to inform development of rulemakings related to the petroleum refining sector. Some of

8-19

Chapter 8: Petroleum Refining

United States
Environmental Protection
Agency

Environmental TopicsLaws & RegulationsAbout EPA

Search EPA.gov

Related Topics: Stationary Sources of Air PollutionCONTACT USSHARE

Clean Air Act Standards and Guidelines for Petroleum Refineries and Distribution Industry

The following are the stationary sources of air pollution for the petroleum refineries and distribution industries, and their corresponding air pollution regulations. To learn more about the regulations and guidelines for each industry, just click on the links below.

National Emission Standards for Hazardous Air Pollutants - NESHAP

New Source Performance Standards - NSPS

Control Techniques Guidelines - CTG

Alternative Means of Emission Limitation - AMEL

Announcements


October 6, 2016 - EPA announces decision to grant reconsideration and take comment on specific issues raised by petitioners. [Learn more](#)


Petroleum Refineries and Distribution Industry Stationary Sources Regulations


Industry	Regulations	Regulation/Guideline Type
Petroleum Product Distribution	Gasoline Distribution MACT and GACT for Bulk Terminals, Bulk Plants and Pipeline Facilities & Gasoline Dispensing Facilities	NESHAP

Crude Oil Distillation Video on Youtube

https://www.youtube.com/watch?v=2xzYf8IL_FE

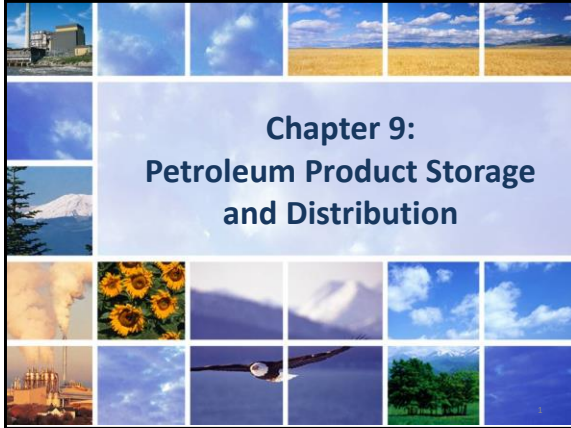


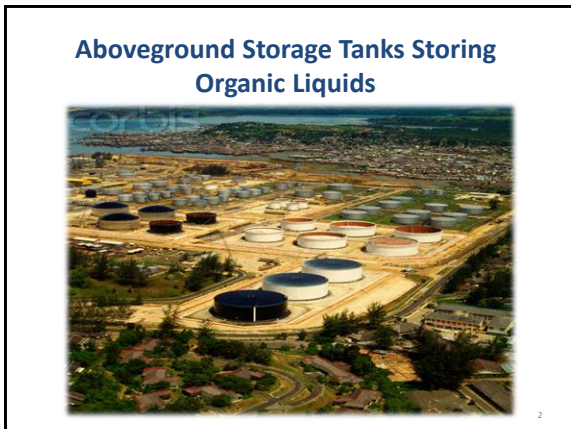

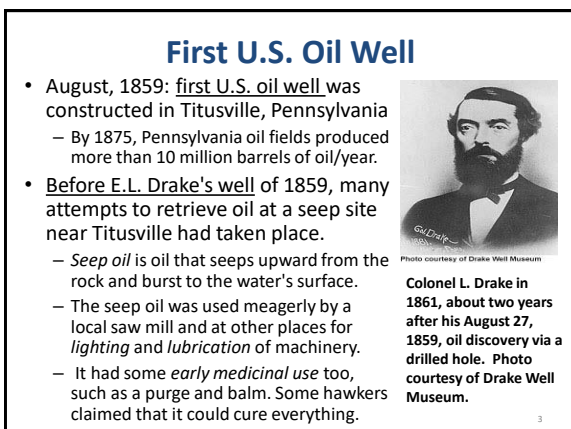

First U.S. Oil Well

- Seep oil on Oil Creek was being exploited by a farm owner, Hamilton McClintock, since the early 1800's.
 - He trapped some of it in a ring of timbers around the main seep.
 - Produced only 20 to 30 barrels/yr.
 - This was the largest oil operation on Oil Creek prior to Drake's well.
- Around 1854, an oil investor, Seneca Oil Company, bought 100 acres near Titusville for \$5,000 which later became Drakes Well.



4

First U.S. Oil Well


- In 1858, Edwin Drake went to Titusville, as an agent of the Seneca. He found that by collecting seep oil it would only produce about 4 gallons a day.
- After that Drake dug a shaft, but water entered in such quantity that the work couldn't continue.
- Next, he tried drilling a well, but the hole was only 16 feet deep and kept caving in.
- Drake then conceived the idea of a drive pipe.
 - The drive pipe consisted of joints ten feet long and was made of cast-iron. The tools could be safely lowered through the pipe which protected the upper hole.

5

First U.S. Oil Well

- Drake ran out of company money, and was abandoned by Seneca.
- He used his own money, ran out of that, and then borrowed \$ 500 from 2 friends.
- It was called "Drake's Folly" until August 27, 1859; the day he found the reservoir of the seep oil at a dept of 69.5 ft.
- The oil was brought to the surface by a hand pitcher pump, the type used for farm water wells and sinks.
 - The well averaged about 10 barrels daily for a year or more.
 - The drive pipe was his greatest invention which he unfortunately did not think to patent and died penniless.

6

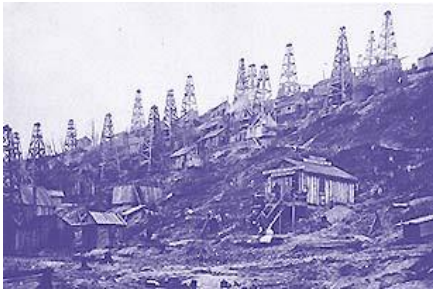

Like the 1849 gold rush which saw multitudes of would-be miners arrive in the frontier regions of California, a similar phenomenon took place a decade later in 1859 in America's eastern wilderness, but that time the beacon was crude oil and the place was Oil Creek at Titusville in Northwest Pennsylvania.

7



Engine house of the Drake Well in Titusville in 1861. Drake with top hat, standing (right). Photo from Drake Well Museum.



Replica of engine house and derrick at the Drake Well Site. It was dedicated in 1946. It now contains a working replica of the original boiler and engine.

8

U.S. Oil Refinery & John D. Rockefeller

- In 1863, Rockefeller (24 yrs old) started a refinery in Cleveland with 3 other partners. One year later, he bought out 2 partners (kept the refinery expert partner).
- In 1870, Rockefeller bought out all other refiners & formed Standard Oil (at that time Standard controlled 10% of all US refining – by 1877, Standard controlled 90%).
- After 1900, Standard acquired oil fields, tankers, refineries & gas stations to control prices (supply & demand).
- In 1914, Standard was ruled a monopoly & broken up to smaller companies (Exxon & Mobil).

9

Original Uses for Oil

- In the 1700's, whale oil was used as an illuminant in lamps and as candle wax.
 - The whale was sought for its oil when the petroleum industry opened in 1859.
- Lighting, created the original use for oil (kerosene).
 - This led to drilling oil wells along Oil Creek & elsewhere. Other uses soon increased the overall demand.
- In early 1880's Edison discovered electricity, replacing the need for kerosene lamps. Around the same time the development of the 4-stroke engine to power a buggy increased the demand for lubricating oil & gasoline.
 - 1903 first Model A; 1908 first Model T (and was the first mass produced vehicle); By 1913 over one million cars in U.S.

10

Coal as King of Energy

- Coal became king of energy (over wood) in 1712 when Thomas Newcomen invented a coal-fired device that could pump water from a flooded mineshaft 160 ft below ground in England.
 - Deep mineshafts became flooded. This extremely limited the amount of coal that could be mined.
 - One of these new devices replaced the alternative of using 50 horses for pumping operations.
 - Made coal abundant and cheap.
- This saved the industrial revolution from collapse.
 - Running out of forests; and
 - 1 lb of coal (when burned) releases 5 times more energy than 1 lb of wood.

11

Oil Replaced Coal as King of Energy

- The coal age ended on January 10, 1901 in Beaumont, TX on a small hill called Spindletop.
 - Al & Curt Hammil drilled 1,100 feet below ground when a plume of oil erupted (it could be seen 4 miles away).
 - For the first time a “rotary drill” was used allowing them to drill deeper (& pierce hard limestone rock) than the old “jackhammer” type drill (rarely went deeper than 300 ft).
- Before Spindletop, world oil production was only a trickle (causing oil to be very expensive).
 - Most early oil wells only delivered 50 to 100 barrels a day.
- After Spindletop, oil became abundant & inexpensive; becoming the king of energy supply.
 - Spindletop delivered 100,000 barrels a day. (They started on 5 new wells each delivering the same amount of oil.)
 - Can now replace coal use in “industry” & “home heating.” ¹²

12

Early US wells used old wooden whisky barrels for oil storage.

Had serious leakage problems: wood did not swell like it does with aqueous products.



Photo courtesy of Drake Well Museum

Wooden barrels and stock tanks were a common sight around oil wells in the 1860's-70's. This photograph is at Oil Creek Valley, 1864.

13



Mather Photograph


Flat boats loaded with wooden barrels of oil at the mouth of Oil Creek and the Allegheny River, Oil City, Pa., 1864. The oil barrels were shipped on barges towed by steamboats to Pittsburgh.

14



Stacked oil barrels (foreground) and barrels on railway loading platform at Shaffer Farm, Oil Creek Valley, 1860's. Shaffer was a boom town, a post office and R.R. station, now a ghost town.


15

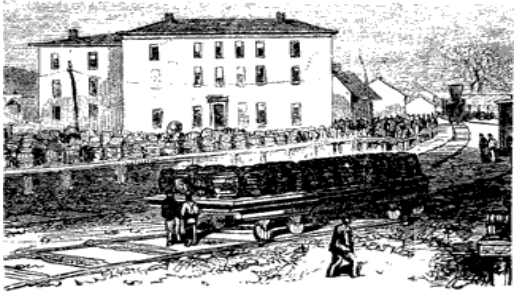

Drawing from Giddens, 1948

The first railroad transportation of oil in barrels was via flat car as shown in this sketch of the Titusville yards, 1862. In the early 1860's the loaded flat car was the best means to get the oil to eastern centers.

16



From a Mather photograph, 1880

A new iron boiler-type tank car coming out of the shops of the Titusville Iron Works in 1880.





17

Early History of AST

- The first metal oil storage tanks were built in the early 1900s made of wrought iron. In the 1920s, the first welded steel storage tanks were built, and replaced wrought iron tanks.
- In 1923, Chicago Bridge & Iron designed the first floating roof tank for the oil industry (to conserve vapors and eliminate fire hazards).



18



Above Ground Storage Tanks Today

VOL Storage Vessels

- Storage Vessels that emit VOCs include tanks, reservoirs and containers
- Process tanks, subsurface caverns, and porous rock reservoirs are not VOL storage vessels
- There are three main types of tanks discussed in the VOL storage vessel rules
 - Fixed Roof Tank
 - Internal Floating Roof (IFR)
 - External Floating Roof (EFR)

19

Common Types of Storage Tanks for Organic Liquid Storage


- Fixed roof tanks**
 - Fixed roof at top of shell: no floating roof
- Internal floating roof tanks**
 - Has both: fixed roof & a light duty floating roof
- External floating roof tanks**
 - Open top (no fixed roof), but has a heavyweight floating roof
- Domed external (or covered) floating roof tanks**
 - An external type floating roof & a fixed roof
- Pressure tanks: (> 2.5 psig)**
 - Used for organic liquids with high vapor pressures.
 - Tanks are horizontal or spherical shape.

20

Tanks Categorized by Product

Product	Volatility	Vapor Pressure	Tank Type
Crude, Lube Oils	Low	< 1.5 psia	Fixed Roof
Kerosene, Gasoline, & Fuel Oil	Moderate	1.5 – 11.1 psia	Floating Roof
Butane, Propane	High	> 11.1 psia	Pressure


Source: APTI 482 Student Manual "Sources and Controls of Volatile Organic Compounds"₂₁

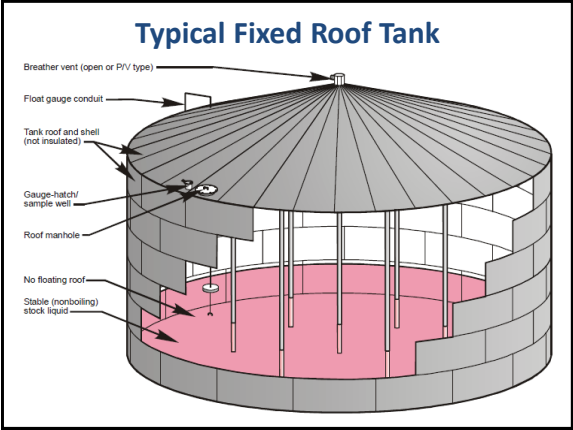

Fixed Roof Tank

- No floating roof: VOCs are free to evaporate into the headspace.
- Vented: either *freely* through open vents or *through a pressure/vacuum vent*.
- Least expensive to construct
 - Older tanks: riveted or bolted construction (not vapor tight)
 - Newer tanks: welded construction (vapor tight)
- Generally considered the minimum acceptable equipment for storing VOLs

23

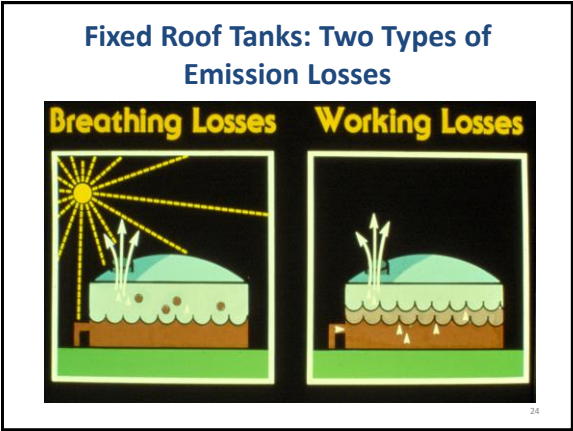

Fixed Roof Tanks: Two Types of Emission Losses

- **Breathing loss** is the expulsion of vapor from a tank through *vapor expansion (evaporation)* as a result of changes in temperature and barometric pressure.
 - This loss occurs without any liquid level change in the tank.
- **Working loss** is the evaporative losses during *filling and emptying* operations.
 - No emissions are attributed to emptying because the flow through the vents would be into the tank


25

Floating Roof Storage Vessels

- Floating Roof
 - Sits on the liquid surface
 - Reduces vapor space in storage vessel above the liquid
- Floating Roof Components include:
 - Floating Roof Deck
 - Rim Seal Systems
 - Deck Fittings
- Two Types of Floating Roofs
 - External
 - Internal

26

Internal Floating Roof Tank

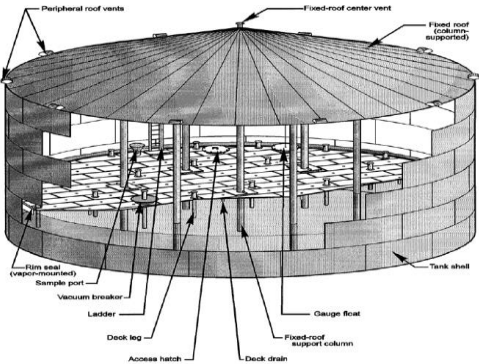

7

Internal Floating Roof Tank

- Has both a permanent fixed roof & a light floating roof inside.
- Internal floating decks are equipped with a rim seal system, which is attached to the deck perimeter and contacts the tank wall.
- The floating deck is also equipped with deck fittings that penetrate the deck and serve operational functions.
- Floating roof covers liquid surface, and the fixed roof is freely vented to atmosphere.
- Floating roof deck is lightweight (aluminum construction)
- Two types of roof decks:
 - Roof that floats on liquid surface (contact roof)
 - Roof that is supported by pontoons (noncontact roof)
 - Pontoons on & around deck top (above the liquid surface)
 - Pontoons on bottom of deck

28

Internal Floating Roof:
Aluminum Deck Supported by Pontoons



29

Contact Aluminum Floating Roof with
Bolted Deck Seams




30

External Floating Roof Tanks

- An external floating roof tank (EFRT) consists of an open-top cylindrical steel shell equipped with a roof that floats on the surface of the stored liquid.
- Floating roof deck is heavyweight & made of welded steel construction (seams are “welded”).
- Two types of floating roofs:
 - *Pontoon* (has increased buoyancy & stability):
 - Pontoons occupy 20% to 40% of roof area.
 - *Double deck* is made up of upper & lower decks separated by trusses & bulkheads.
 - Lower deck floats on liquid & the space between decks is separated into liquid-tight compartments.



31

External Floating Roof (Pontoons)

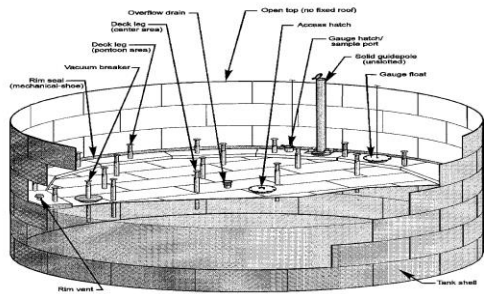

32

Pontoon Steel Floating Roof




33


Pontoon Steel Floating Roof




External Floating Roof Tank (Double Deck)

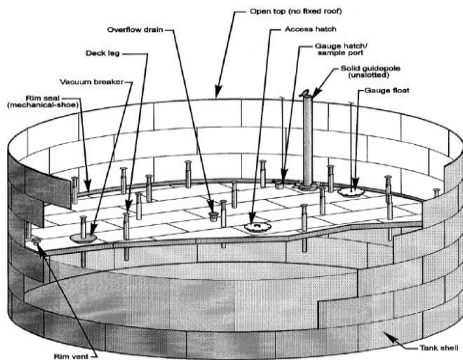

Double Deck Floating Roof

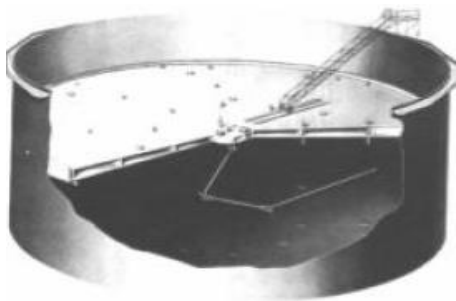

Domed External Floating Roof Tank

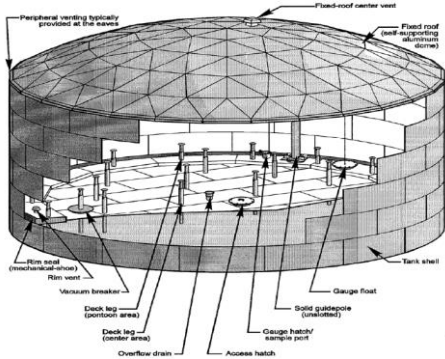


37

Domed External Floating Roof Tank

- An external-type floating roof & a fixed roof
 - Floating roof deck is heavyweight – same as the “external floating roof tank”
 - If floating roof deck is lightweight – tank would then become an “internal floating roof tank.”
- Except for weight of floating roof, the “domed external floating roof tank” will have all the same features as an “internal floating roof tank.”

38


Internal Floating Roof Tank: Deck Fittings

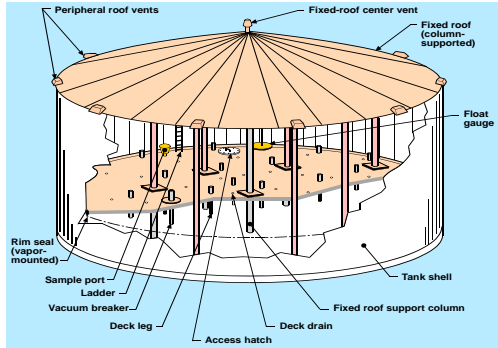


39

Deck Fittings

Access Hatch: used for construction and servicing




Gauge Float: to indicate the level of liquid within the tank




Deck Fittings

Deck Drains: to remove rainwater from an open deck




Vacuum Breakers: used to relieve pressure when deck is landed




Deck Fittings

Deck Leg: to prevent the deck from reaching the tank bottom (when the deck lands)




Fixed Roof Support Column: columns used to support fixed roof to tank bottom (passes through floating deck)




Deck Fittings

Ladder Well




Guide-Poles: attached at top & bottom of tank – used to prevent adverse movement of deck (prevents damaged seals) (slotted & non-slotted)

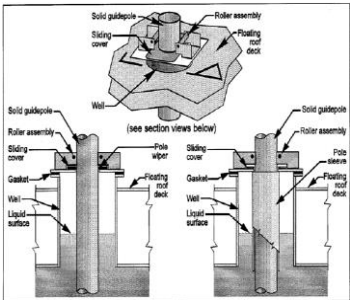


Rim Seal System & Deck Fittings

Rim Vent: used to release any excess pressure caused by seal



Sample Ports: to allow for sampling of the liquid



Rim Seal System

- The rim seal system slides against the tank wall as the roof is raised and lowered. *It fills the space between the rim and the tank shell to minimize evaporative losses from this area.*
- Two types of rim seal systems:
 - Primary seal or
 - Secondary seal with a primary seal system.


Types of Primary Rim Seals

- **Vapor-mounted:** Highest emissions – fair service history
 - Bottom is not in contact with the liquid surface, therefore there is a vapor space beneath rim seal.
 - Two types: *Flexible-wiper (blade)* type and a *resilient-filled* type (foam within a fabric envelope) (or water-filled)
- **Liquid-mounted:** lowest emissions – poorest service history
 - Bottom is in contact with liquid surface.
 - *Resilient-filled design* (or water-filled)
- **Mechanical-shoe:** fairly low emissions – best service history
 - Metallic shoe slides against tank shell;
 - Mechanical device (spring) pushes shoe outward; and
 - Primary seal fabric closes the space between shoe and the rim of the deck


46

Examples of Primary Seals

Vapor-Mounted Primary Seal



Liquid-Mounted Primary Seal




47

Examples of Primary Seals

Vapor-Mounted Wiper Primary Seal



Mechanical-Shoe Primary Seal



48


Types of Secondary Rim Seals

- A secondary seal may be used to provide additional evaporative loss control over that achieved by the primary seal alone.
- Mounted above the primary seal & may be added to any type of primary seal.
- Types of secondary seals are the same as primary seals.


49

Examples of Secondary/Primary Seals

Rim-Mounted Secondary Seal (Flexible-wiper Type) over a Mechanical-Shoe Primary Seal




Shoe-Mounted Secondary Seal (Flexible-Wiper Type) over a Mechanical-Shoe Primary Seal




50

Examples of Secondary/Primary Seals

Rim-Mounted Secondary Seal (Flexible-wiper Type) over a Resilient-Filled (Vapor-Mounted) Primary Seal



Rim-Mounted Secondary Seal (Flexible-Wiper Type) over a Resilient-Filled (Liquid-Mounted) Primary Seal



51

Internal Floating Roof Rim Seal System Control Efficiency

Seal System Description	Efficiency Relative to Baseline
Vapor mounted primary seal only	Baseline
Mechanical shoe or liquid mounted primary seal only	55%
Vapor mounted primary seal with secondary seal	63%
Mechanical shoe or liquid mounted primary seal with secondary seal	76%

Source: "Alternative Control Techniques Document: Volatile Organic Liquid Storage in Floating and Fixed Roof Tanks" EPA-453/R-94-001 (1994)

External Floating Roof Rim Seal System Control Efficiency

Seal System Description	Efficiency Relative to Baseline
Vapor mounted primary seal only	Baseline
Vapor mounted primary seal with secondary seal	66%
Mechanical shoe primary seal only	84%
Mechanical shoe primary seal with shoe mounted secondary seal	95%
Liquid mounted primary seal only	95%
Mechanical shoe primary seal with rim mounted secondary seal	99%
Liquid mounted primary seal with rim mounted secondary seal	99%

Source: "Alternative Control Techniques Document: Volatile Organic Liquid Storage in Floating and Fixed Roof Tanks" EPA-453/R-94-001 (1994)

External Floating Roof Tanks

- Emission sources:
 - Rim seals,
 - Deck fittings, &
 - Exposed liquid on tank walls
- Floating roof is subject to wind action.
 - Wind action increases rim seal & deck fitting losses.

Internal Floating Roof Tanks

- Emission Sources
 - Rim seals,
 - Deck fittings,
 - Deck seams, (because aluminum deck seams cannot be welded, they must be bolted causing emission leaks)
 - Exposed liquid on tank walls
- Wind is not a factor in emissions.
- Converting a *fixed* roof tank to an *internal* floating roof tank reduces emissions by 69% to 98%.

55


Floating Roof Tanks Emissions

- **There Are Two Situations For Estimating Emissions**
 1. During **normal operations**
 - Sum of withdrawal losses and standing storage losses
 2. During **roof landing operations**: when the tank is emptied to the point that the roof lands on deck legs, (*the roof is not floating*) and other mechanisms must be used to estimate emissions.
 - Sum of “standing idle losses” and “filling losses”

56


Standing Idle Losses: Floating Roof Tanks

- Daily breathing expels vapors from under the floating roof (*same as “breathing” losses*).
- The headspace above the floating roof is either:
 - Open to the atmosphere (for EFRT) or
 - Freely vented to the atmosphere (for IFRT)



57

Filling Losses: Floating Roof Tanks
(same as “working” losses)

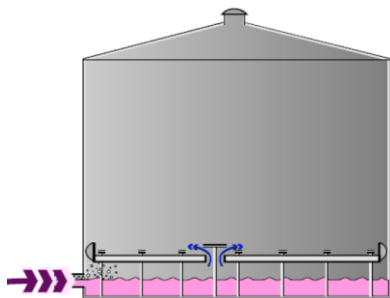

When the tank is refilled, the incoming liquid displaces vapors from under the floating roof.

Floating Roof Tanks Emissions:
Normal Operations

- The *emissions* are a *sum* of withdrawal losses and standing storage losses.
- Withdrawal losses result from the evaporation of the *liquid that clings to the tank wall* when the floating roof is lowered.
- Standing storage losses are a result of evaporative losses through *rim seals, deck fittings, and deck seams*.

59

Floating Roof: Standing Storage Losses

- Deck seams losses from *internal floating roof tanks* with *bolted* decks only. (None from a *welded* deck.)
- Deck fitting losses are the vapor losses from numerous *fittings that pass through floating roof decks* to accommodate structural support or allow for operational functions.

60

Emission Losses from Floating Roofs

- External Floating Roof VOC emission losses
 - Withdrawal: 4%
 - Rim Seals: 68%
 - Deck Fittings: 28%
- Internal Floating Roof VOC emission losses
 - Withdrawal: 12%
 - Rim Seals: 35%
 - Deck Fittings: 35%
 - Deck Seam losses: 18%
- Note: These % will vary as a function of tank diameter, equipment type (i.e. seals used), & equipment throughput.
- Source: "Alternative Control Techniques Document: Volatile Organic Liquid Storage in Floating and Fixed Roof Tanks" EPA-453/R-94-001 (1994)

61

Control Techniques for AST

- Fixed Roof Tanks
 - Converting fixed roof tank to an internal floating roof tank, or
 - Installing a closed vent system routed to a control device at a prescribed efficiency [i.e., for "Hazardous Organic NESHAP (HON) its 95%].
- Floating Roof Tanks
 - Applying controls to deck fittings (i.e., equip the covers of certain deck fittings with gaskets)
 - Employing certain types of seals (i.e., use liquid-mounted seals instead of vapor-mounted seals)
 - Employing certain work practices (i.e., keep all deck fitting covers closed at all times except for access)

62

Safety devices for low-pressure storage tanks

- Vent valves: These allow for the controlled release of vapors and gases into the atmosphere to maintain internal pressure within safe limits, preventing tank collapse due to vacuum or rupture due to excessive pressure.
- Emergency relief valve: Automatically activated to release excess pressure if other control systems fail, they provide safety against excessive pressurization.
- Flame arrestors: Installed on vent lines, these prevent an external flame from entering the tank, protecting against explosions.
- Level indicator: These devices monitor and control the liquid level inside the tank and prevent overfilling or excessive emptying, both scenarios that could lead to hazardous situations.
- Automatic leak detection: Designed to detect the presence of vapors or liquids outside the tanks and alert personnel to take corrective measures.
- Secondary Containment barriers: Surrounding structures around the tank to contain the spread of spills or leaks.

63

Venting for Floating Roof Tanks -When Landed

(To prevent a vacuum that would collapse deck)

Just before the "deck support leg" touches the tank bottom, the "leg-actuated vacuum breaker" will contact the bottom first & lift the lid of the vacuum breaker

The breather vent remains open until the roof is again floated, so whenever the roof is landed, vapor can be lost through this vent. These losses are called "standing idle losses."

Venting of Fixed-Roof Tanks

- Tank “out-breathing” causes a *positive pressure* within tank. It occurs:
 - From liquid filling operations
 - When heated gases in tank expand, raising the pressure (i.e. caused by the sun).
- Tank “in-breathing” causes a *negative pressure* within tank when liquid is withdrawn from tank.

Venting for Atmospheric Tanks

Vents are necessary: 1. To prevent excess pressure & 2. To prevent excess vacuum


94160 PRESSURE RELIEF VENT

94200 EMERGENCY VENT-MANHOLE COVER

Pressure-Vacuum Vent

L & J Technologies
Open Vent Model: Weight loaded

Vents Closed: Tank at Operating Pressure (Normal Operation)

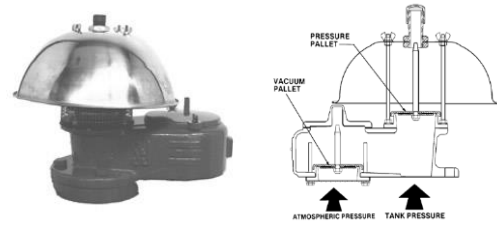


Vents should not leak (< 500ppm from 40 CFR 61 subpart V "Equipment Leaks" sect. 242.11 – standard for closed vent systems).

67

Pressure-Vacuum Vent

Tank Pressure ≥ Relieving Pressure
Exhaust Vent Open


Tank Vacuum ≥ Vacuum Relieving Pressure
Vacuum Vent Open

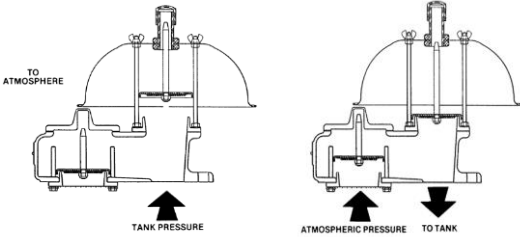

68

Typical Vent Air Flow Curve

Relieving pressure is the pressure at which the vent is sufficiently open to achieve the required flow capacity.

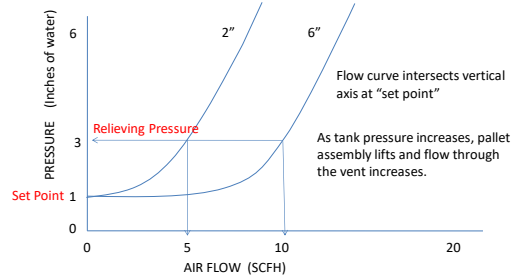

Set pressure is the pressure at which a vent begins to open.

69



Summary of CAA's AST Regulations


- *New Source Performance Standards (NSPS)*
 - Volatile Organic Liquid Storage Vessels and Bulk Terminals (40 CFR 60, Subparts K, K_a, K_b, K_c, XX)
- *Reasonably Available Control Technology (RACT)*
 - Existing "major sources" in a non-attainment area must use RACT
- *PSD & NSR programs*: BACT & LAER requirements
- *National Emission Standards for Hazardous Air Pollutants (NESHAP)*
- *Accidental Releases (40 CFR 68.10)*
 - Facilities having specific chemicals over threshold amount will have to develop risk management plans

71

AST Subject to Control Requirements

Regulation	Source	10K to 20K gal	20K to 40K gal	> 40,000 gal
NSPS subpart K	Tanks built 1973 to 1978	Exempt	Exempt	> 1.5 psia
NSPS subpart Ka	Tanks built 1978 to 1984	Exempt	Exempt	> 1.5 psia
NSPS subpart Kb	Tanks built since 1984	Exempt	>4.0 psia	> 0.75 psia
Part 61 subpart Y	Benzene tanks	>10,000 gal	Same	Same
MACT subpart F, G, H	SOCMI tanks	New Source >1.9 psia	Existing Source > 1.9 psia	New Source > 0.75 psia
MACT subpart R	Gasoline Distrib.	Exempt	Gasoline only >1.9 psia	Gasoline only
MACT subpart CC	Petro. Refining	Exempt	New Source >11 psia	Existing source > 1.5 psia
MACT sub. EEEE (non-gasoline)	Organic liquid Storage Tanks	>5000 gal >4 psi	Same	>50,000 gal >11.1 psia

72

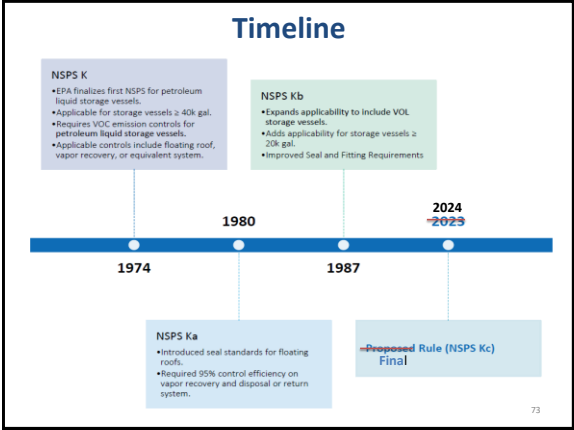

Existing Organic Liquid Storage Tanks

- Existing major sources in an ozone nonattainment area may have organic liquid storage tanks.
- RACT will apply to these organic liquid storage tanks.
- States use Control Technology Guidelines (CTG) & Alternative Control Techniques (ACT) as basis for their RACT determination:
 - 1977 CTG recommended RACT to be like NSPS subpart K
 - 1978 CTG recommended RACT to be like NSPS subpart Ka
 - 1994 ACT recommended RACT to be like NSPS subpart Kb

76

Subpart K Control Requirements for Storage Vessels > 40,000 Gallons

Vapor Pressure (psia)	Fixed Roof Tank	Floating Roof Tank
≥ 1.5 but ≤ 11.1	Install a floating roof	No change required
> 11.1	Vapor recovery or a control system	Vapor recovery or a control system

77

Subpart Ka Control Requirements for Storage Vessels > 40,000 Gallons

Vapor Pressure (psia)	Internal Floating Roof Tank	External Floating Roof Tank	Fixed Roof Tank
> 1.5 but < 11.1	A Primary seal alone	Primary & secondary seal required; & Pan-type deck is eliminated	Install floating roof with seals or control system that is 95% efficient
> 11.1	Control system that is 95% efficient	Control system that is 95% efficient	Control system that is 95% efficient

78

Subpart Kb: Standard (TVP<11.1 psia)

- Tank capacity ≥ 75 m³ but < 151 m³ &
 - TVP ≥4.0 psia but <11.1 psia
- Tank capacity ≥ 151 m³ &
 - TVP ≥ 0.75 psia but <11.1 psia
- For both of the above, the vessel shall have:
 - A pontoon-type or double-deck-type external floating roof that floats on the surface of the liquid and is equipped with a *mechanical shoe or liquid mounted primary seal* and with a *secondary seal* (additional requirements);
 - A fixed roof with an internal floating roof equipped with a *mechanical shoe or liquid mounted primary seal* or with *both primary and secondary seals* (additional requirements); or
 - A closed vent system and control device (95% efficient)
 - no emissions > 500 ppm from closed vent

79

Subpart Kb: Standard (TVP>11.1 psia)

- Tank capacity > 75 m³ & the TVP is >11.1 psia:
- Requires a closed vent system and control device (95% efficient)
 - no emissions > 500 ppm from closed vent
- 75 m³ = 19,813 gallons
- 151 m³ = 39,890 gallons

80

Kb Restricts the Use of Vapor-Mounted Rim Seals

Primary Rim Seal Type	Internal Floating Roof Tank	External Floating Roof Tank
Vapor-Mounted	Acceptable only with a secondary seal	Not Acceptable
Liquid-Mounted	Acceptable alone	Acceptable only with a secondary seal
Mechanical-Shoe	Acceptable alone	Acceptable only with a secondary seal

81

**(Subtitle Kb) External Floating Roof:
Additional Requirements**

- Gaps between the tank wall and the mechanical shoe or liquid mounted primary seal shall not exceed 1.5 inches and the accumulated area shall not exceed 10.0 square inches per foot of tank diameter.
- One leg of a mechanical shoe primary seal must extend into the liquid and the other end must be at least 24 inches above the liquid surface.
- Gaps between the tank wall and the secondary seal shall not exceed 0.5 inches and the accumulated area shall not exceed 1.0 square inch per foot of tank diameter.
- There shall be no holes, tears or other openings in the primary and secondary seals.

82

**(Subtitle Kb) External Floating Roof:
Additional Requirements**

- Openings in a non-contact roof, except for vacuum breaker vents and rim space vents, must have projections below the liquid surface.
- Openings in the roof, except for vacuum breaker vents, rim space vents, roof drains and leg sleeves, must be equipped with gasket covers, seals or lids.
- Vacuum breaker vents and rim space vents are to have gaskets and must be closed when the roof is floating.
- Emergency roof drains must have a slotted membrane fabric cover that covers at least 90% of the area of the opening.

83

**(Subtitle Kb) Internal Floating Roof:
Additional Requirements**

- Openings in a non-contact roof, except for vacuum breaker vents and rim space vents, must have projections below the liquid surface.
- Openings in the roof, except for vacuum breaker vents, rim space vents, stub drains, leg sleeves, column wells, ladder wells and sample wells, must be equipped with gasket covers or lids.
- Covers on access hatches and gauge-float wells must be bolted except when they are in use.
- Vacuum breaker vents and rim space vents are to have gaskets and must be closed when the roof is floating.

84

(Subtitle Kb) Internal Floating Roof:
Additional Requirements

- Openings in the roof for sampling must be a sample well with a slit fabric cover that covers at least 90% of the opening.
- Openings in the roof for columns supporting the fixed roof must have a flexible fabric seal or a gasketed sliding cover.
- Openings in the roof for ladders must have a gasketed sliding cover.

85

Inspection for Gaps & Holes in Tank
Primary and Secondary Seals



86

NSPS Subtitle Kc

- **On Oct 15, 2024**, EPA finalized 40 CFR **Subtitle Kc**.
- Subpart Kc applies to facilities that begin construction, or modification after October 4, 2023.
- Subpart Kc, finalized requirements to:
 - reduce the vapor pressure applicability thresholds and
 - revise the (VOC) standards to reflect the best system of emission reduction (BSER) for affected storage vessels.
- In addition, the EPA is finalizing degassing emission controls; clarification of startup, shutdown, and malfunction (SSM) requirements; additional monitoring requirements; and other technical improvements.

87

Subtitle Kc: Storage Vessels Required to Control

Capacity (gal)	NSPS Kb		NSPS Kc (Proposal)	
	Lower VP Boundary (psia)	Chemical Applicability	Lower VP Boundary (psia)	Added Chemical Applicability
≥ 20k & < 40k	≥ 4	Gasoline	≥ 1.5	+Benzene +Hexane
≥ 40k	≥ 0.75	Heptane Ethyl Alcohol Benzene Hexane Gasoline	≥ 0.5	+Toluene

88

Kc Standards For Floating Roofs

- Internal Floating Roof Tanks
 - 98% Control Efficiency
 - Improved Seal Requirements
 - Liquid Mounted or Mechanical Shoe Primary Seal
 - Rim-Mounted Secondary Seal
 - Improved Fitting Controls
 - Access Hatch and Guide poles
 - New LEL Monitoring Requirements
- External Floating Roof Tans
 - Designed to be equivalent control standard, 98% control efficiency
 - More Restrictive Guide pole Requirements
 - Welded Deck Seams

89

(Kc) Closed Vent System Requirements

- 98% Control Efficiency Standard
- Requirements on Vents, Pressure Relief Devices, and Bypass Lines to prevent emissions venting to the atmosphere
- Annual leak detection monitoring using Method 21
- Quarterly visible, audible, and olfactory inspections
- Performance testing for control devices
- Continuous Monitoring System (CMS) requirements

90

(Kc) DeGassing Emission Controls

- Degassing emissions occur when storage vessels are emptied.
- Degassing emission control standard:
 - Applicable to storage vessels:
 - $\geq 1,000,000$ gallons
 - With vapor pressure ≥ 1.5 psi
 - Requires 98% control efficiency for emission controls

91

(Kc) Monitoring, Recordkeeping, & Reporting Requirements

Internal Floating Roofs

- Annual Roof Top Visual Inspections
- Annual Lower Explosive Limit (LEL) Monitoring
- 10-Year Out-of-Service Inspection
- Alarm System for Monitoring Landing Events

External Floating Roofs

- Gap Measurements
- Annually for Secondary Seal
- Every five years for Primary Seal
- Alarm System for Monitoring Landing Events

Closed Vent Systems

- Requirements on Conservation Vents, Pressure Relief Devices, and Bypass Lines to prevent emissions venting to the atmosphere
- Annual leak detection monitoring using Method 21
- Quarterly visible, audible, and olfactory inspections
- Performance Testing for Control Devices
- Continuous Monitoring System (CMS)

92

Gasoline Distribution MACT



93

Gasoline Distribution Facilities MACT
40 CFR Part 63 Subpart R

- §63.420 - **Applicability:** Applies to Bulk Gasoline Terminals (BGT) or Pipeline Breakout Stations (PBS) that are a HAP major source.
 - BGT & PBS are then “screen tested” for applicability.
- §63.421 – **Definitions:** PBS means any facility along a pipeline containing *storage vessels* used ... to store gasoline from the pipeline... and continue transport...
- §63.422 – **Standards:** *loading racks* – [this MACT regulates the *loading racks* from only the BGT]
 - Meet the NSPS for Bulk Gasoline Terminals &
 - Install a vapor collection system with emissions < 10 mg VOC/liter gasoline

400 – 2 - 94


Gasoline Distribution Facilities MACT

- §63.423 – **Standards:** *storage vessels* – [this MACT regulates the storage vessels from both PBS & BGT]. For gasoline storage vessels having a capacity $\geq 75 \text{ m}^3$ (19,813 gallons).
 - New sources (built after 2/8/94): Subject to all control provisions under NSPS subpart Kb (§60.110(b))
 - Existing sources: Install Kb floating deck rim seals or a control device on all storage vessels: and install Kb deck fitting on all external floating roof tanks
- §63.424 **Standards:** *Equipment leaks* - during loading (for both BGT and PBS) shall perform a monthly *leak inspection (& repair)* of all equipment.


400 – 2 - 95

Gasoline Distribution Area Source NESHAP
(40 CFR Part 63 Subpart BBBBBB)

- This rule applies to area source bulk gasoline terminals, pipeline breakout stations, pipeline pumping stations, and bulk gasoline plants.
- *Bulk gasoline plant* (throughput < 20,000 gal/day) with tanks ≥ 250 gal.
 - Use submerged fill when loading the cargo tank, or
 - Use bottom filling with a permanent fill pipe attached to the cargo tank bottom.
- June, 2024: EPA *final rule* will tighten emission limits, etc. for Subpart R (major sources) & Subpart BBBBBB (area sources).



NSPS for Bulk Gasoline Terminals
40CFR60, Subpart XX

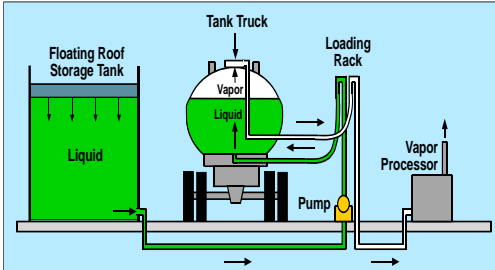

As gasoline is pumped from the storage tank into the tank truck, the vapors are displaced through a vapor-collection system of pipes and hoses to a vapor processor for either recovery or destruction. (June, 2024 final rule will tighten emission limits, etc.)

97

Control Technology Guidelines (CTG) for
RACT Determinations for Existing Sources

- Control of VOCs from Bulk Gasoline Plants, CTG Document, EPA-450/2-77-035
- Control of VOCs from Tank Truck Gasoline Loading Terminals, CTG Document, EPA-450/2-77-026
- Control of VOC Leaks from Gasoline Tank Trucks and Vapor Collection Systems, CTG Guideline Document, EPA-450/2-78-051


98

Gasoline Service Station:
Stage 1 and Stage 2 Controls



99


Stage I Control

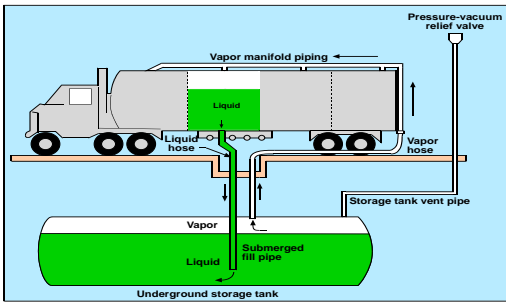

EPA CTG: "Design Criteria for Stage I Vapor Control Systems—Gasoline Service Stations" (November 1975, EPA 450/R-75-102)

100

Stage II Control

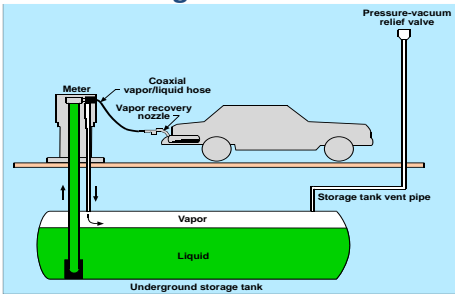

In the 1990 CAAA, Congress provided Stage II VOC emission reductions in ozone nonattainment areas and in certain areas of the Ozone Transport Region. Congress also provided authority for EPA to allow states to remove Stage II vapor recovery programs from their SIPs upon EPA making a finding that cars on-board vapor recovery system is in "widespread use." In 2012, EPA made this "widespread use" finding.

101

Chapter 10

Degreasing



10 - 1

Federal NESHAPS/MACT For
Halogenated Compounds
(40 CFR 63 Subpart T)

- Applicability
- Exemptions
- Standards
- Tests, Recordkeeping & Reporting

10 - 2

Halogenated Solvents,
NESHAP Degreasing

- Sources (regardless of annual emissions) using:
 - Batch Cold Cleaning Machines
 - Batch Vapor Cleaning Machines
 - In-line Vapor Cleaning Machines Using:
 - Methyl Chloride
 - Trichloroethylene
 - Carbon Tetrachloride
 - n-Propyl Bromide
 - Perchloroethylene
 - 1,1,1-trichloroethane
 - Chloroform


10 - 3

**Hal. Sol. NESHAP -
Degreasing**

- Total concentration of one or more of the six solvents must exceed five percent by weight for the rule to apply
- Does not apply to hand wiping
- Contains 2 gallons or Less


10 - 4

Used to clean . . .

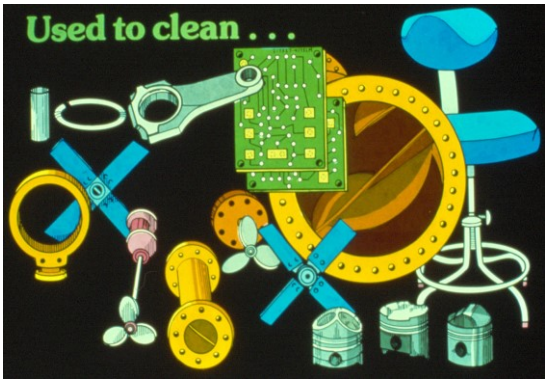

10 - 5

Soiling on Surfaces

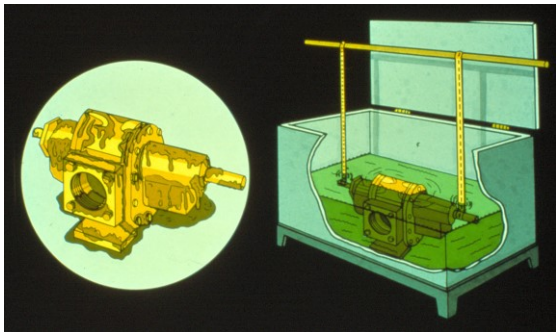

10 - 6

Soil Categories

- Organics
 - rosins, glycols, oils, greases, waxes
- Water Soluble Inorganic Salts
 - chlorides, sulfates, etc.
- Insoluble Particles
 - dirt, dust, metal fines, etc.

10 - 7

Types of Degreasing Equipment

- Cold cleaners
- Open top vapor cleaners
- In-line cleaners
- Non-air vapor interface

10 - 8

Degreasing Solvents

- Mineral spirits
- Stoddard solvents
- Alcohols
- Halogenated solvents
- N-propyl bromide *
- Hydrofluoroether
- Proprietary blends

10 - 9

Halogenated Solvents

- Methylene chloride
- Perchloroethylene
- Trichloroethylene
- Hydrochlorofluorocarbons


10 - 10

Cold Cleaners




10 - 11

Carburetor Cleaner




10 - 12

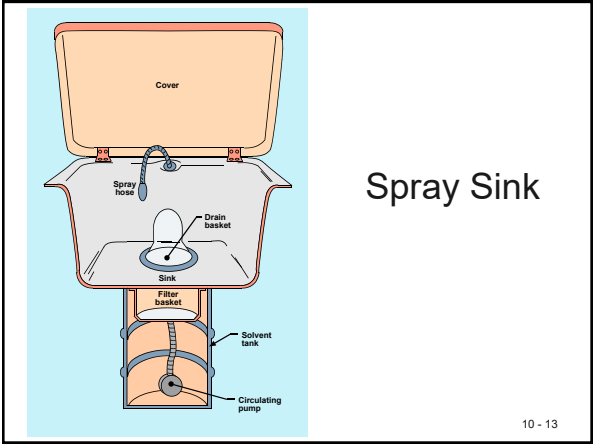






Dip Tank Cold Cleaner

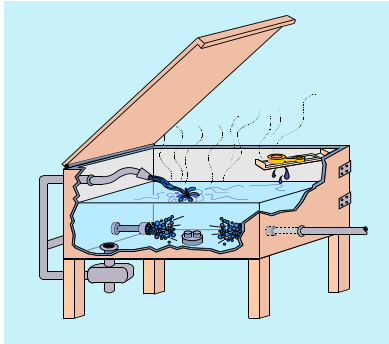

10 - 16

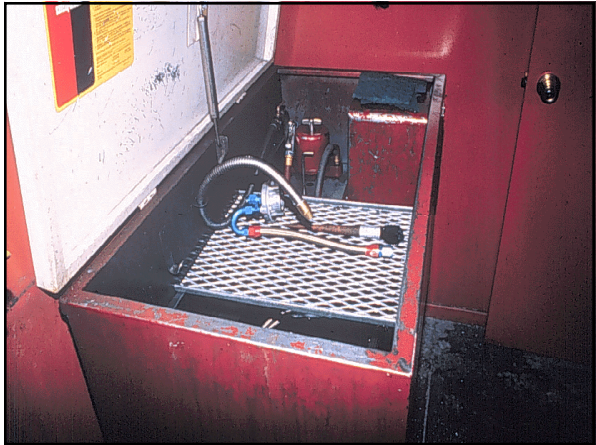

Batch Cold Cleaning Machine Standards

- National Emission Standards for Halogenated Solvent Cleaning, 40 CFR 63, Subpart T
Applicability: Batch vapor, in-line vapor, in-line cold and batch cold cleaning machines that contain methylene chloride, perchloroethylene, trichloroethylene, 1,1,1-trichloroethane
- RACT guidelines for degreasers are divided into two levels of control. Control System A consists of operating practices and simple, inexpensive control equipment. Control System B consists of System A plus additional requirements to improve control effectiveness. Facilities emitting less than 100 tons per year are expected to apply System A. Facilities emitting more than 100 tons per year or that are located in urban non-attainment areas greater than 200,000 population are expected to apply System B.

10 - 18

Potential Sources of Emissions


- Waste solvent disposal
- Solvent carryout
- Bath evaporation

10 - 19

Open Top Vapor Cleaners

10 - 20


Open Top Vapor Cleaner

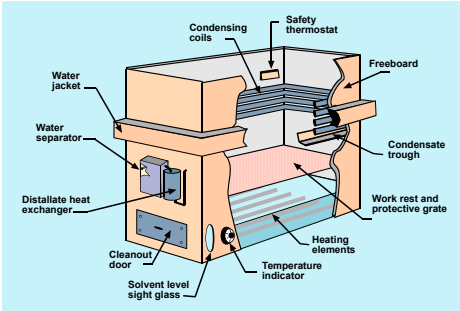

10 - 21

Chapter 10: Degreasing



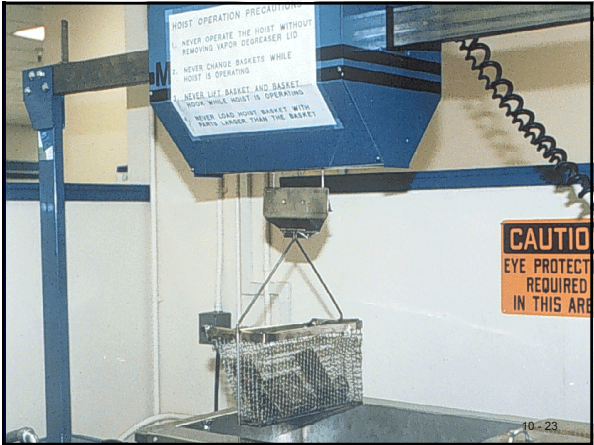



Open Top Vapor Cleaners




- Important Elements:
- Condenser Coils
 - Freeboard
 - Water Separators
 - Covers

10 - 25

Cooling Coils

- Located On Inside Walls Of Cleaner
- Contains Vapor Zone With Cool Air Blanket Cover
- Usually Has Water As The Coolant

10 - 26

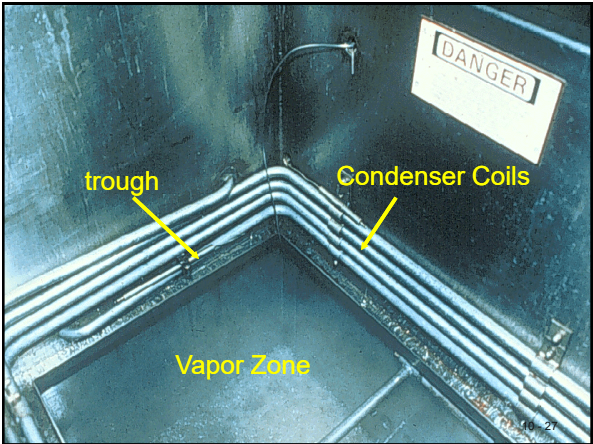



Freeboard

- Protects The Solvent Vapor Zone From Disturbance Caused By Air Movement Around The Equipment
- Generally Established By The Location Of The Condenser Coils


10 - 29



Measuring
Freeboard

10 - 30

Chapter 10: Degreasing

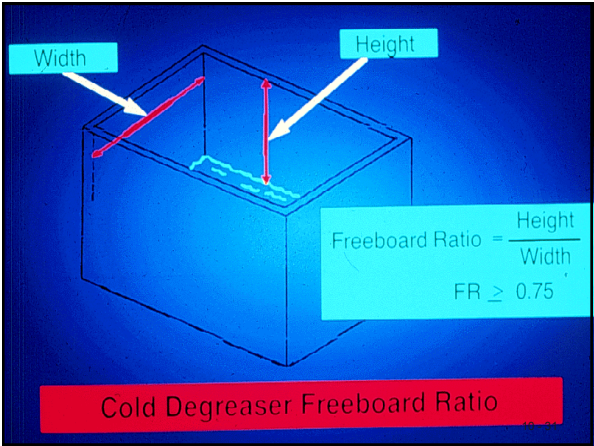

High Freeboard

- Distance From The Top Of The Solvent To The Top Of The Tank Reduces Draft Near Air/Solvent interface
- Minimum Recommended Ratio = 0.75
- Ratio Of 1.0 - In the Subpart T Regulation Control Combination Tables
- OSHA Requires at Least 6" For Cold Cleaners



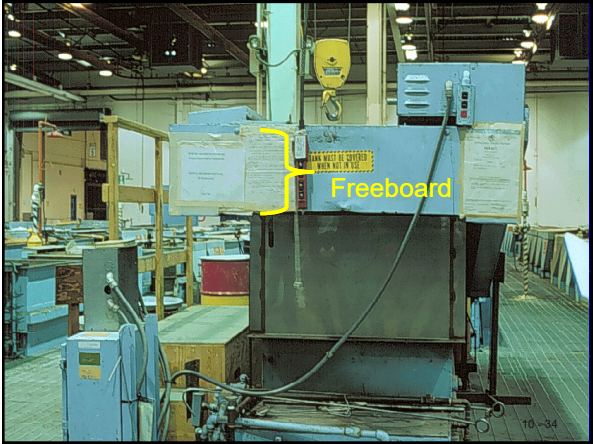


TABLE 1—CONTROL COMBINATIONS FOR BATCH VAPOR SOLVENT CLEANING MACHINES WITH A SOLVENT/AIR INTERFACE AREA OF 1.21 SQUARE METERS (13 SQUARE FEET) OR LESS

- Option Control combinations
 - 1 Working-mode cover, freeboard ratio of 1.0, superheated vapor.
 - 2 Freeboard refrigeration device, superheated vapor.
 - 3 Working-mode cover, freeboard refrigeration device.
 - 4 Reduced room draft, freeboard ratio of 1.0, superheated vapor.
 - 5 Freeboard refrigeration device, reduced room draft.
 - 6 Freeboard refrigeration device, freeboard ratio of 1.0.
 - 7 Freeboard refrigeration device, dwell.
 - 8 Reduced room draft, dwell, freeboard ratio of 1.0.
 - 9 Freeboard refrigeration device, carbon adsorber.
 - 10 Freeboard ratio of 1.0, superheated vapor, carbon adsorber.
-
- (2) Each cleaning machine shall have a freeboard ratio of 0.75 or greater.
 - (3) Each cleaning machine shall have an automated parts handling system capable of moving parts or parts baskets at a speed of 3.4 meters per minute (11 feet per minute) or less from the initial loading of parts through removal of cleaned

Control Combinations for Batch Vapor Machines Greater Than 13 ft² in Area


Option	Control Combination
1	Freeboard refrigeration device, freeboard ratio of 1.0, superheated vapor
2	Dwell, freeboard refrigeration device, reduced room draft
3	Working-mode cover, freeboard refrigeration device, superheated vapor
4	Freeboard ratio of 1.0, reduced room draft, superheated vapor
5	Freeboard refrigeration device, reduced room draft, superheated vapor
6	Freeboard refrigeration device, reduced room draft, freeboard ratio of 1.0
7	Freeboard refrigeration device, superheated vapor, carbon adsorber

Water Separators

- 1. Nearly All Vapor Cleaners Have Water Separators
- 2. These Allow The Water That Condenses On The Coils To Separate From The Solvent Before The Solvent Is Reintroduced In The System


10 - 37

WATER SEPARATOR

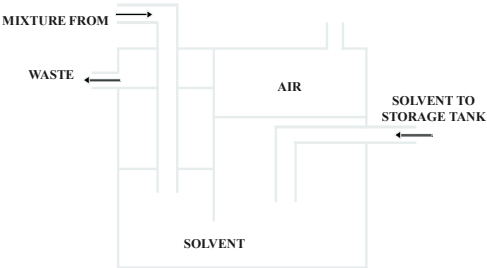


10 - 38

Details of Vapor Degreaser Design

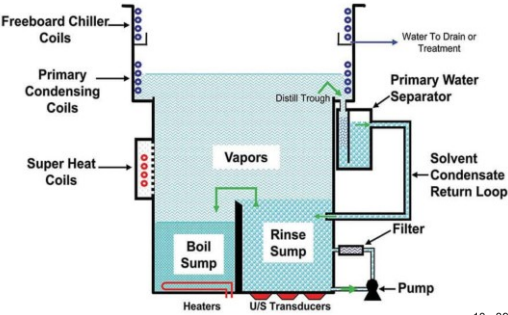


10 - 39

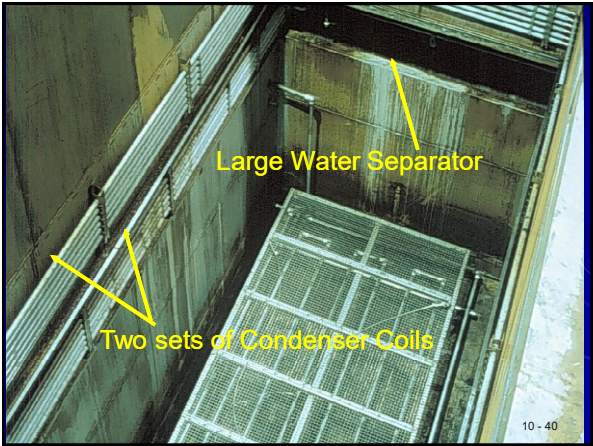

Covers

- Historically Single Piece, Unhinged Metal Cover
- Newer Designs Might Have:
 - Roll-top Plastic Covers
 - Canvas Curtains
 - Hinged Counter Balanced Metal Covers

10 - 41

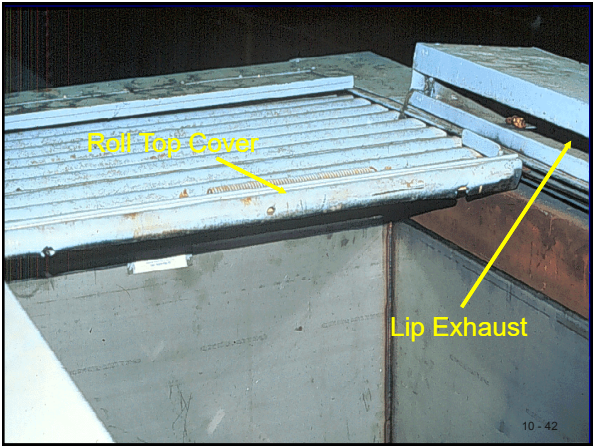

Potential Sources of Emissions

- Waste solvent disposal
- Solvent carryout
- Bath evaporation


10 - 43

In-Line Cleaners

- There Are Seven Different Types:
 - Cross-Rod
 - Belt
 - Monorail
 - Strip
 - Vibra
 - Circuit Board
 - Ferris Wheel

10 - 44

Cross-Rod Cleaner

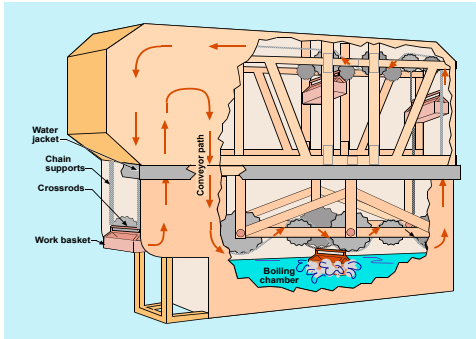

10 - 45


Cross-Rod Degreaser



- Parts are supported by Rods Between The two Power Driven Chains.
- Designed To immerse Small Parts.


10 - 46

Monorail Cleaner

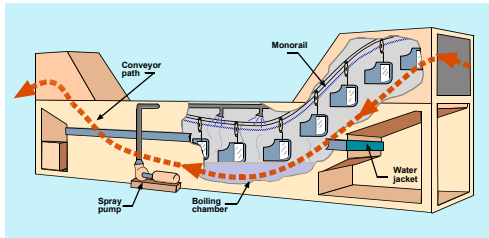

10 - 47

Mesh Belt Cleaner

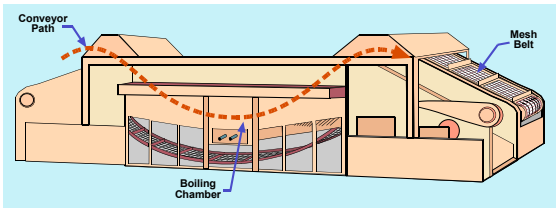

10 - 48

Control Combinations for Existing In-Line Machines	
Option	Control Combination
1	Superheated vapor, freeboard ratio of 1.0
2	Freeboard refrigeration device, freeboard ratio of 1.0
3	Dwell, freeboard refrigeration device
4	Dwell, carbon adsorber
Control Combinations for New In-Line Machines	
Option	Control Combination
1	Superheated vapor, freeboard refrigeration device
2	Freeboard refrigeration device, carbon adsorber
3	Superheated vapor, carbon adsorber

10 - 49

Emission Control Techniques
(Cold Cleaners and Open Top Vapor Cleaners)

- Water cover (cold cleaner only)
- Manual or powered cover
- Refrigerated primary condenser
- Refrigerated freeboard device
- Increased freeboard ratio
- Reduced room draft
- Enclosed designs
- Mechanically assisted parts handling
- Carbon adsorption
- Operation and maintenance

10 - 50

Operation and Maintenance

- Spray within vapor zone.
- Start condenser coolant flow before starting sump heater
- Operate sump cooler during downtime
- Drain parts before removing
- Repair leaks and equipment promptly
- Perform solvent transfer in a closed system
- Utilize control safety switches

10 - 51

Maintenance Work Inside a Degreaser



10 - 52

Emission Control Techniques
(In-Line Cleaners)

- Minimized entrance and exit openings
- Refrigerated freeboard device
- Drying tunnels
- Rotating baskets
- Carbon adsorbers
- Hot vapor recycle or superheated vapor
- Operation and maintenance

10 - 53

Process Inspection

- Review records maintained by source
- Check equipment operation
- Observe operating procedures
- Observe work area
- Check for liquid leaks
- Review waste solvent disposal procedures

10 - 54

Review Records Maintained by Source

- Design information
- Operational information
- Maintenance information

10 - 55

Review Records Maintained by Source

- Design information
 - Degreaser dimensions
 - Solvent type
 - Cover design
 - Type of drainage facility
 - Types of safety switches
 - Hoist or conveyor speed
 - Ventilation rate
 - Add-on control equipment

10 - 56

Review Records Maintained by Source

- Operational information
 - Solvent use
 - Operating frequency
 - Quantity and types of parts cleaned
 - Use of covers

10 - 57

Review Records Maintained by Source

- Design information
- Operational information
- Maintenance information

10 - 58

Check Equipment Operation

- Required equipment
- Condition and integrity of equipment
- Solvent temperature
- Coolant temperature and flow rate
- Hoist or conveyor speed
- Ventilation rates

10 - 59

Observe Operating Procedures

Observe Work Area

Check for Liquid Leaks

Review Waste Solvent
Disposal Procedures

10 - 60

Halogenated Solvent Cleaning: National Emission Standards for Hazardous Air Pollutants (NESHAP)

On this page:

- [Rule Summary](#)
- [Rule History](#)
- [Additional Resources](#)
- [Compliance](#)

Rule Summary

The halogenated solvent cleaner National Emission Standards for Hazardous Air Pollutants (NESHAP) requires batch vapor solvent cleaning machines and inline solvent cleaning machines to meet emission standards reflecting the application of the maximum achievable control technology (MACT) for major and area sources. Area source batch cold cleaning machines are required to achieve generally available control technology. The rule regulates the emissions of the following halogenated hazardous air pollutants (HAP) solvents: methylene chloride (MC), perchloroethylene (PCE), trichloroethylene (TCE), 1,1,1-trichloroethane (TCA), carbon tetrachloride (CT), and chloroform (C).

Basic Information

Legal Authority

- 42 U.S.C. §7401

Federal Register Citations:

- 73 FR 73631
- 73 FR 62384
- 72 FR 25138
- 71 FR 75182
- 71 FR 47670
- 65 FR 54419
- 64 FR 69637
- 64 FR 67793
- 64 FR 56173

Halogenated Solvent National Emission Standards for Hazardous Air Pollutants (NESHAP) Questions and Answers

This page contains three Question and Answer documents to provide assistance with compliance for the Halogenated Solvent NESHAP.

For more information on the rule, visit the regulation page for [Halogenated Solvent Cleaning: National Emission Standards for Hazardous Air Pollutants \(NESHAP\)](#).

You may need a PDF reader to view some of the files on this page. See EPA's [About PDF page](#) to learn more.

- [Halogenated Solvent NESHAP \(Subpart T\) Q&A's \(PDF\)](#) (2 pp, 11 K, March 23, 2000)
- [Halogenated Solvent NESHAP \(Subpart T\) Q&A's Part 2 \(PDF\)](#) (2 pp, 12 K, April 25, 2000)
- [Halogenated Solvent NESHAP \(Subpart T\) Q&A's Part 3 \(PDF\)](#) (8 pp, 21 K, November 7, 2002)

[Contact Us](#) to ask a question, provide feedback, or report a problem.


EPA-453/R-94-081


Guidance Document for the Halogenated Solvent Cleaner NESHAP

Sponsored by:
Emission Standards Division
Office of Air Quality Planning and Standards
U. S. Environmental Protection Agency
Research Triangle Park, NC 27711

Federal Small Business Assistance Program
Control Technology Center
Information Transfer and Program Integration Division (ITPID)
Office of Air Quality Planning and Standards
U. S. Environmental Protection Agency
Research Triangle Park, North Carolina 27711
April 1995

Chapter 10: Degreasing

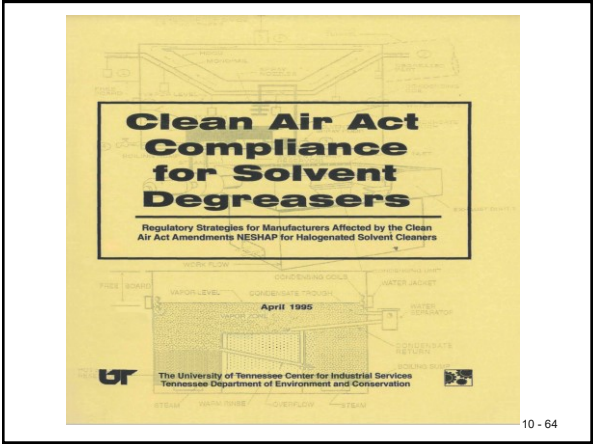

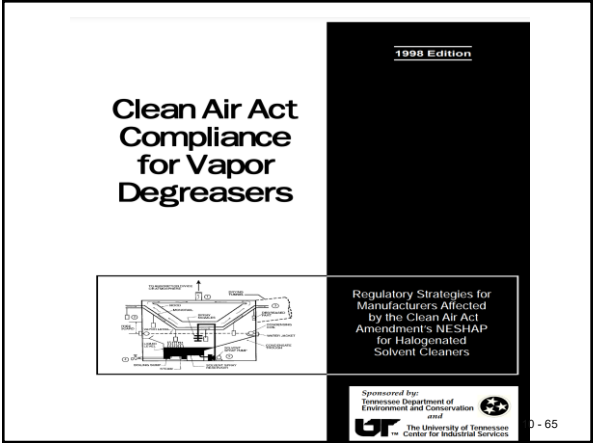



Chapter 11

Dry Cleaning

11 - 1

What is Dry Cleaning?

A process for cleaning fabrics in which the articles are washed in a non-aqueous solvent and then dried in a heated air stream.

11 - 2

Dry Cleaning Steps

- Washing
- Extraction
- Drying

11 - 3

Dry Cleaning Solvents

- Perchloroethylene (PCE)
- Petroleum solvents
- Cyclic siloxanes (D5) (GreenEarth)
- Glycol ethers (Rynex)
- Liquid carbon dioxide (MiCELL)
- n-propyl bromide
- DF-2000 Hydrocarbon Solvent:
- Wet cleaning

11 - 4

EPA's Proposal and the Toxics Substances Control Act (TSCA)

- In June 2016, Congress amended the Toxic Substances Control Act (TSCA)
 - Amended TSCA requires EPA to assess and address risks from chemicals currently in commerce
 - Amended TSCA imposes statutory timeframes for regulation
 - Provides protection for the public and predictability for the regulated community
- PCE was identified in 2016 as one of the first chemicals for risk evaluation
 - 2020 Risk Evaluation followed a public draft and peer review process
 - EPA determined that PCE presents an unreasonable risk under its conditions of use

Purpose and Overview Of Rulemaking

- The proposal addresses the unreasonable risk identified in the TSCA section 6 risk evaluation of PCE (December 2020) which assessed all uses subject to TSCA
- The proposed rule, when finalized, will prevent consumer and occupational illness while ensuring identified essential uses can continue safely where possible
 - EPA's proposal would allow select uses to continue with strict workplace protections, while prohibiting all remaining uses
- EPA's proposed rule is open for public comment until **August 15, 2023**
- EPA will then consider public comments and finalize new regulations of PCE under TSCA

Proposed Dry Cleaning Phaseout

- EPA is proposing to prohibit PCE use in dry cleaning through a 10-year phaseout to provide dry cleaners time to transition to an alternative process
- For the phaseout timeframe, EPA considered precedents set by state regulations, the dry cleaning NESHAP, and information provided by stakeholders, including:
 - The average lifespan of a PCE dry cleaning machine is 15 to 25 years and few new machines are produced or sold in the U.S.
 - Alternatives are available, such as wet cleaning, hydrocarbons, and multi-solvent dry cleaning machines
 - Use of PCE in dry cleaning is declining as machines are retired and alternatives are adopted

Phaseout Timing (after publication date of the final rule)	
6 months	<ul style="list-style-type: none">Prohibition on use of PCE in any dry cleaning machine acquired 6 months or later
3 years	<ul style="list-style-type: none">Prohibition on use of 3rd generation PCE machines
10 years	<ul style="list-style-type: none">Prohibition on the use of PCE in all dry cleaning and spot cleaning, including in 4th and 5th generation machinesProhibition on the manufacturing, processing, and distribution in commerce of PCE for use in dry cleaning solvent

Physical Properties of Dry cleaning Solvents

Solvent	Molecular Weight	Boiling Point (F)	Flash Point (F)	Latent Heat of Vaporization	Kauri-butanol Value
PERC	165.8	250	***	90	92
Stoddard	140-150	310	103	118	28-45
CFC-113	187.5	118	***	63	31
1-1-1, Trich.	***	165	***	104	124
DF-2000	140	***	147	***	27

11 - 8

Industry Classes

- Commercial
- Industrial
- Coin operated

11 - 9

Equipment Types


- Transfer
- Dry-to-Dry

11 - 10




11 - 11

Washing Process

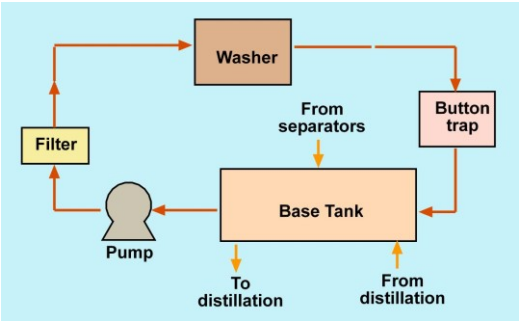


11 - 12

Early Drying Process

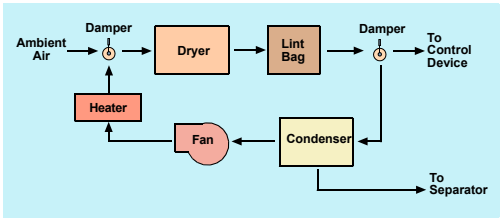


11 -13

Drycleaning Process Diagram

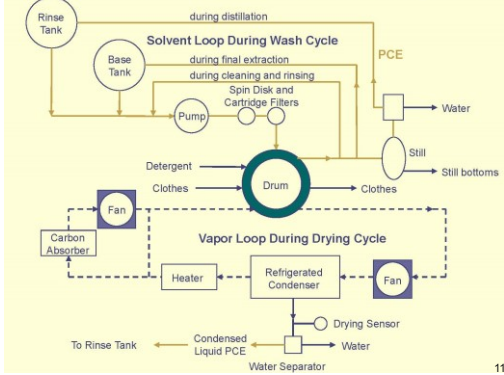



11 -14

Closed-Loop Process

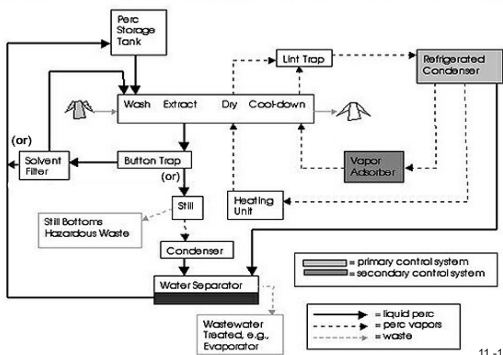

11 -15

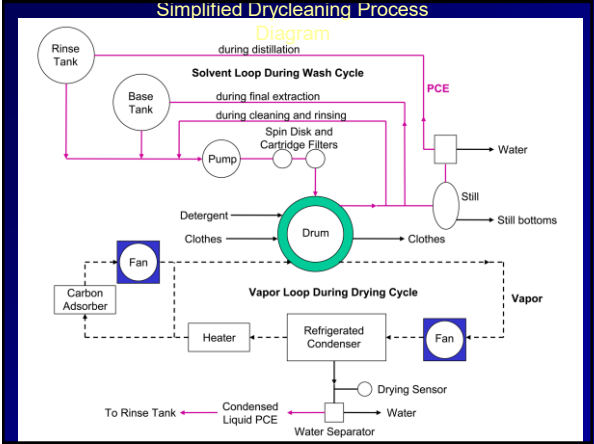

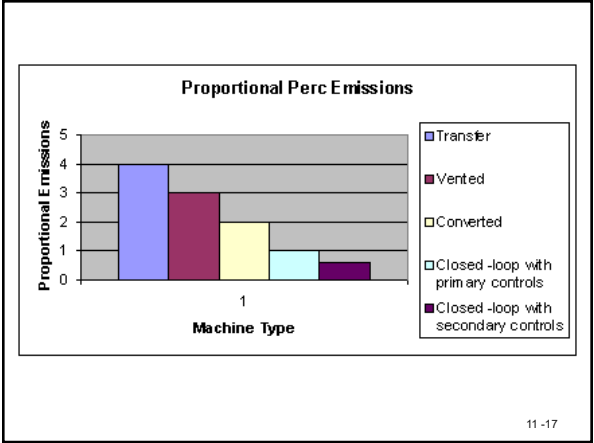

Drycleaning Process

Drycleaning Machine Evolution

- ✓ **1st Generation: transfer machines** – Requires manual transfer of solvent-laden clothing between a separate washer and dryer. Perc transfer machines are to be phased out as of July 27, 2008 and should no longer be in operation. These machines allow for significant release of solvent into the environment when transferring garments from the washer to the dryer unit.
- ✓ **2nd Generation: dry-to-dry (vented)** – Dry-to-dry machines integrated the washer and dryer into the same unit in the late 1960s. While these machines were more efficient than transfer machines, they were inefficient because they vented solvent vapors directly to the atmosphere and exposed workers to solvent vapor.
- ✓ **3rd Generation: dry-to-dry (nonvented - aka closed-loop)** – Dry-to-dry machines with refrigerated condensers were introduced in the late 1970s and early 1980s. Refrigerated condensers were used to convert solvent vapors for recovery and reuse. These nonvented machines are closed-loop systems, which are only open to the atmosphere when the machine door is opened. These machines reduce vapor emissions and are still commonly used.

Drycleaning Process
Drycleaning Machine Evolution

- ✓ **4th Generation: dry-to-dry (closed-loop with secondary vapor control)** – These machines are essentially "third generation" machines with a carbon absorber to further reduce solvent vapors in the machine. These machines are much more effective at recovering solvent vapors.
- ✓ **5th Generation: dry-to-dry (closed-loop with secondary vapor control and drum monitor)** – These machines have the same features as "fourth generation" machines however, they also have a monitor inside the machine drum and an interlocking system to ensure that the concentration is below approximately 300 ppm before the loading door can be opened.

11 - 19

Drycleaning Process
Drycleaning Machine Evolution


Transfer
drycleaning
machines




11 -20

Drycleaning Process
Drycleaning Machine Evolution

Dry-to-dry drycleaning
machines

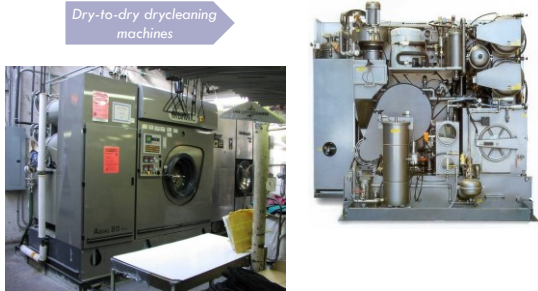

11 -21

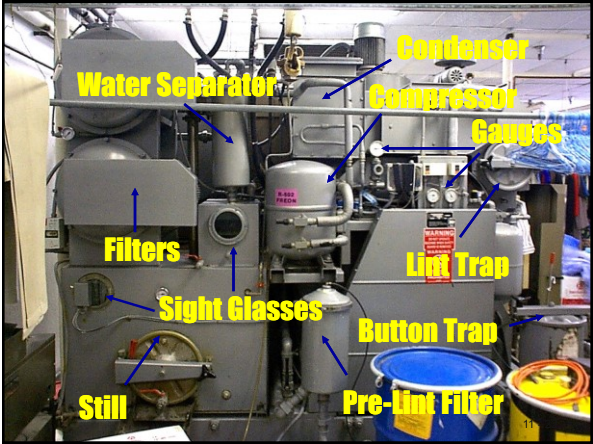


Solvent Filtering

- Spin filters
- Cartridge filters

11 - 23




11 - 24

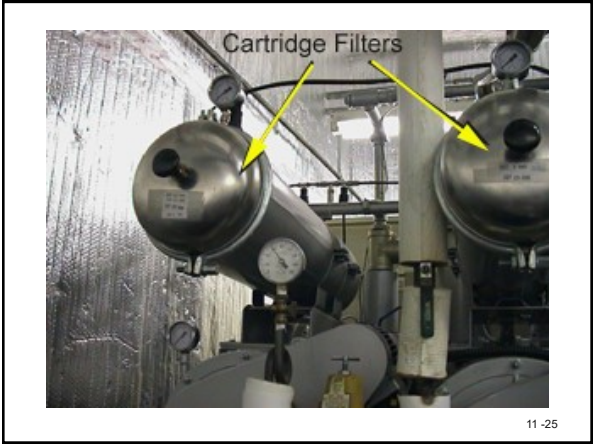


Solvent Distillation

- Perchloroethylene: 250°F at 1 atm
- Petroleum: 225-235°F at -22 to -27 in. Hg
- Still boil down

11 - 26

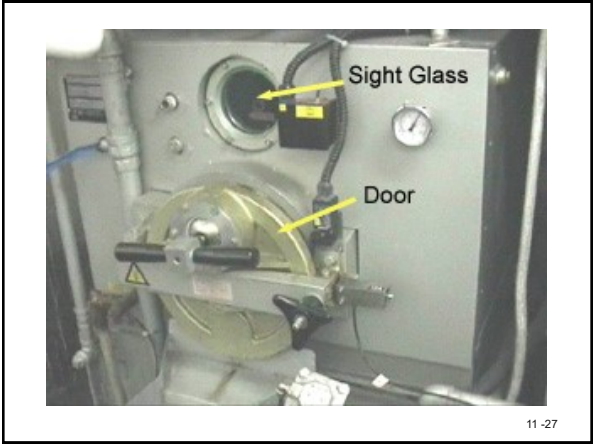

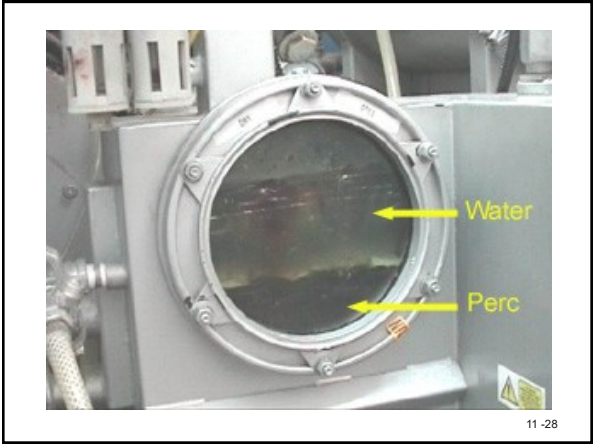

Emission Control Techniques


- Refrigeration condensation
- Carbon adsorption
- Fugitive emission control


11 - 29

Process Inspection


- Review records maintained by source
 - Solvent purchases
 - Internal inspection audits
 - Monitoring checks
 - Maintenance records
- Check for vapor leaks
- Check for liquid leaks

11 - 30

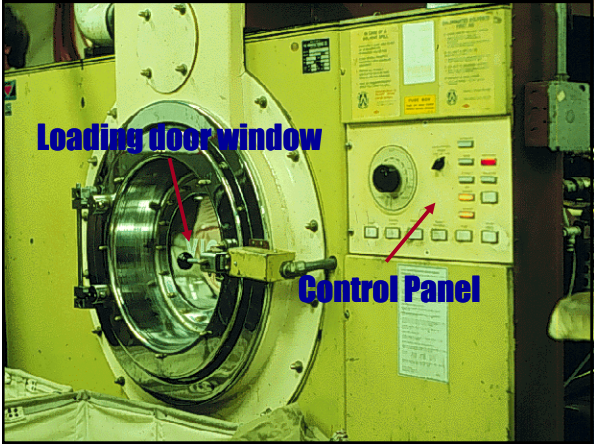

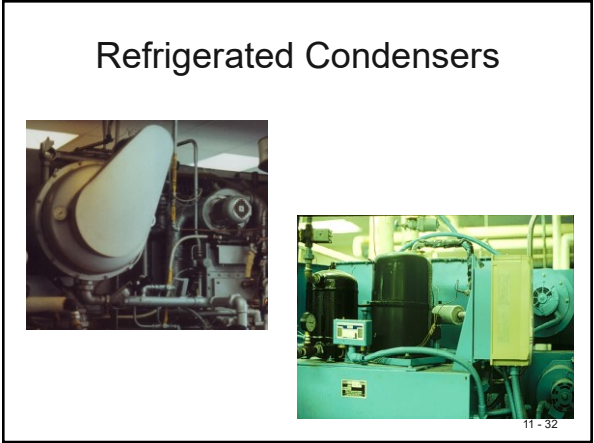



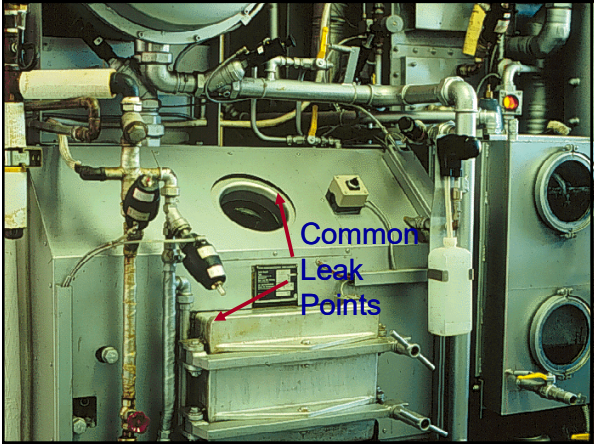


Solvent Filtration

- Purpose
- Pre Filters
- Cartridge Filtration
- Disk Filtration
- Regenerative or
- Flex-Tube Filters




11 - 35

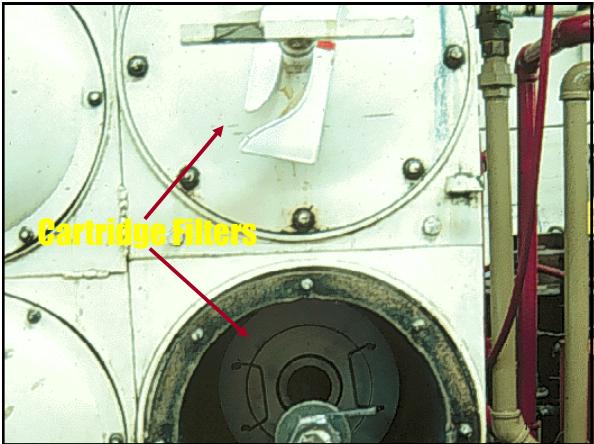

Stills

- Distillation
- PERC Recovery
- 75% Capacity
- Muck Cookers
- Hazardous waste
- Azeotrope



Secondary Control Devices


- Vapor Adsorbers
- During End Of Cool Down Cycle
- Decreases Emissions
- Lowers Operator Exposure

11 - 38

Misc. Equipment & Operations

- Water Separators
- Inductive Door Fans
- Spill Containment Systems
- Ventilation/Exhaust Systems
- Drying Cabinet
- Water Repelling Operations

11 - 39

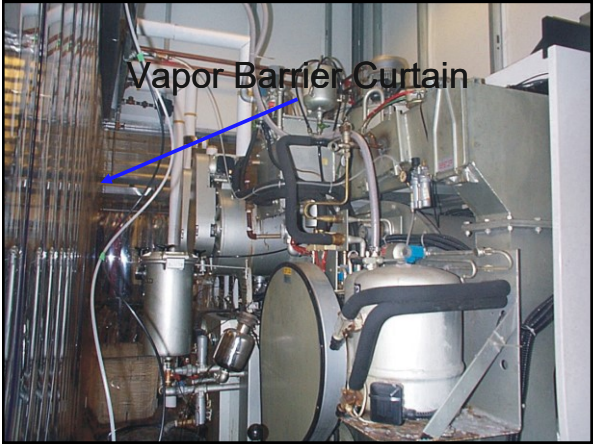

Required Maintenance

- Refrigerated Condensers
- Carbon Adsorbers
- Cartridge Filtration Systems
- Stills & Muck Cookers
- Button & Lint Traps
- Machine Openings
- Waste Water Treatment Units

11 - 41


Historical Waste Management Practices

The chart below identifies historical waste disposal practices that have contributed to environmental contamination at drycleaning facilities:

Method of Disposal	Waste Water	Spent Filters	Still Bottoms	Lint
Outside back door of facility				
Sanitary Sewer, Septic Tank or Storm Sewer				
Dumpster or Municipal Waste				

11 - 42



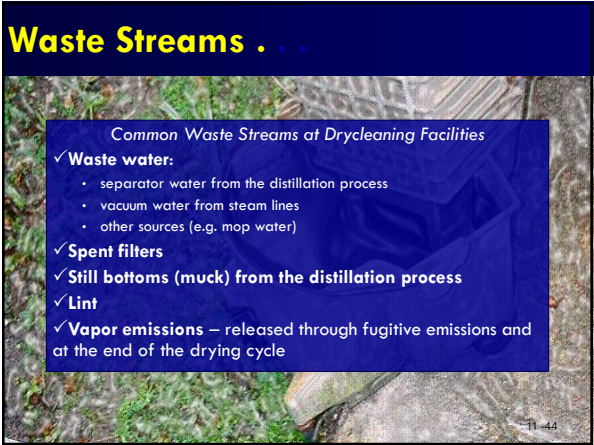



The Inspection

- Verify Equipment and Current Owners
- Conduct Leak Inspections
- Check For Closed Containers
- Verify Refrigerated Condenser Temp
- Check All Records
- Review The Inspection Results

11 - 46

Vapor Leak Inspections

- Definitions
- Halogenated Hydrocarbon Detector
- Areas To Check
- When To Check
- How Do You Do It?
- If a Leak is Found?



11 - 47

Vapor Leak Inspections



<https://www.youtube.com/watch?v=NybbKb8nnhQ>
https://www.youtube.com/watch?v=b5zM_tFpYmM&t=43s

Leak Inspection Areas

Button Trap
Pump area
Filters
Misc. Gaskets
Openings

Stills
Lint Trap
Water Separator
Storage Areas

11 - 49

ATTENTION

Are you located in a building with residents?

All co-residential perc dry cleaners must switch to an alternative solvent or move the machine to a nonresidential building by December 21, 2020!

Are you prepared?

For more information about the National Emissions Standards for Hazardous Air Pollutants (NESHAP) for Perc Dry Cleaners (40 CFR PART 63, SUBPART M) visit: www.ildceo.net/enviro or call **800-252-3998** or email dceo.sbeap@illinois.gov.

NOTE: Perc dry cleaners changing to petroleum-base solvents must register under the Registration of Smaller Sources Program (ROSS) or apply for an air permit depending on solvent usage.

11 - 50

Best Management Practices

Best Practice Areas


- ✓ Secondary containment
- ✓ Hazardous waste management
- ✓ Direct coupling/closed-loop solvent delivery systems
- ✓ Equipment inspections and maintenance

BEST

11 - 51


Vapor Intrusion

VAPOR INTRUSION AND AMBIENT AIR STUDY
FINAL RESULTS REPORT
ARMEN CLEANERS
ANN ARBOR, MICHIGAN



Prepared for:
EPA Office of Superfund Remediation and Technology Innovation
Technology Innovation and Field Services Division
Technology Integration and Information Branch
Contract 68-W6Z-004, Work Assignment 46

11 - 52



Clean-Up Information

Contaminated Site

Search CLU-IN

Technologies

Contaminants

Issues

Strategies & Initiatives

Technology

Testing & Evaluation

Additional Resources


SHARE

EVENTS

CONNECT

New Focus Area: Chlorinated Solvents

Chlorinated solvents have been used for a variety of commercial and industrial purposes, such as degreasers, dry-cleaning solutions, paint thinners, herbicides, pesticides, resins, glues, and a host of other mixing and thinning solutions.

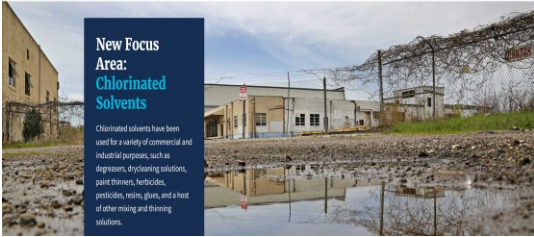

[Contaminated Site Clean-Up Information \(CLU-IN\)](#)

11 - 53

Volume II: Chapter 8

**Methods for Estimating Air
Emissions from Paint, Ink, and
Other Coating Manufacturing
Facilities**

February 2005



1

- Specialty ink products include textile and silk screen ink, invisible inks, powder inks, carbon paper, typewriter, and duplicating inks. Paint, ink, and other coating manufacturing can be classified as a batch process and generally involves the blending/mixing of resins, pigments, solvents, and additives. Traditional paint, ink, and other coating manufacturing consists of four major steps:
- Preassembly and premix;
- Pigment grinding/milling/dispersing;
- Product finishing/blending; and
- Product filling/packaging.

12 - 2

Preassembly and Premix

- In the preassembly and premix step, liquid raw materials are assembled and then mixed in containers to form a viscous material to which pigments are added.
- For solvent-based paints, the raw ingredients include resins, organic solvents, plasticizers, dry pigment, and pigment extenders.
- Raw materials used in the preassembly and premix step for water-based paints include water, ammonia, dispersant, pigment, and pigment extenders.
- Raw materials for ink manufacturing include pigments, oils, resins, solvents, and driers.
- The premix stage results in the formation of an intermediate product that is referred to as the base or mill base.
- The type of equipment used in the premix step depends on the batch size and the type of coating being produced.
- Drums equipped with a portable mixer may be used for drum-sized batches. These mixers normally have an impeller with three or four blades

12 - 3

Pigment Grinding or Milling

- Pigment grinding or milling entails the incorporation of the pigment into the liquid base of the coating to yield a fine particle dispersion. The three stages of this process include wetting, grinding, and dispersion, which may overlap in any grinding operation.
- The wetting agent, normally a surfactant, wets the pigment particles by displacing air, moisture, and gases that are adsorbed on the surface of the pigment particles.
- Grinding is the mechanical breakup and separation of pigment clusters into isolated particles and may be facilitated by the use of grinding media such as pebbles, balls, or beads.
- Common used equipment include the following: roller mills, ball and pebble mills, attritors, sand mills, bead and shot mills, high-speed stone and colloid mills, high-speed dispersers, high-speed impingement mills, and horizontal media mills.


12 - 4

Product Finishing


- The final step in the paint, ink, and other coating manufacturing process is the product filling operation. During the filling step, filtration is performed to remove impurities and to catch small particles of grinding media.
- Once the material has been filtered, it can be transferred into pails, drums, totes, tank wagons, or other containers for shipment. Filling may be accomplished either manually or mechanically depending on the number and size of the containers to be filled.

12 - 5

Basic Flow Sheets for Coating Manufacturing Processes

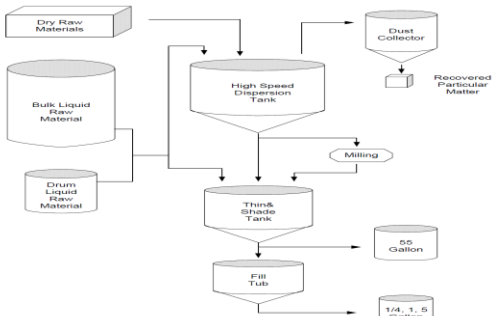

12 - 6

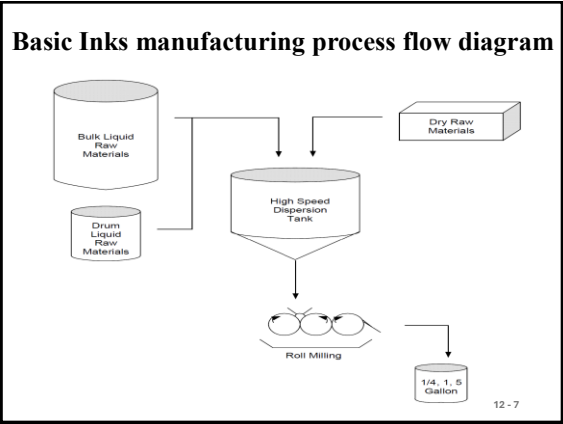

Emission Sources

- Process operations
- Related miscellaneous operations
- Material storage
- Equipment leaks
- Spills and other abnormalities
- Miscellaneous Operations
 - Solvent reclamation
 - Cleaning
 - Wastewater treatment

12 - 8

Emission Estimation Methods

- Emission Factors
- Source Specific Models
- Material (Mass) Balance Calculations
- Test Data

12 - 9

Emission Factors

- Emission factors may be used to calculate total VOC and PM emissions from a paint and ink manufacturing facility, as well as emissions from specific types of equipment typically found at such a facility.
- These types of equipment include the following:
- Process equipment;
 - Solvent reclamation systems;
 - Parts washing equipment; and
 - Process piping.

12 - 10

Source Specific Models

- Emission estimating models/equations are available for the following types of emissions found at paint, ink, or other coating manufacturing facilities:
- Material loading
 - Heat-up losses from dispersion/grinding activities
 - Surface evaporation during mixing/blending operations
 - Filling
 - Gas sweep or purge
 - Cleaning solvent loading
 - Solvent reclamation
 - Material storage
 - Wastewater treatment and Spills

12 - 11

Material (Mass) Balance Calculations

- The material balance approach to emissions estimation considers the given facility as a sort of “black box,” where one compares the total quantity of raw materials consumed versus amounts of materials leaving the facility as product or waste. Waste can consist of used filter bags or cartridges, spent solvent or still bottoms, dust collector material, pigment bags and/or drum residue, and wastewater.

12 - 12

**Types of Items for Material
Balance Information**

- Delivery of Raw material
- Exact quantities and specifications of finished products
- Amount of raw material contained in waste
- Batch production raw material additions

12 - 13

Test Data

- Testing can be performed to quantify point source or fugitive emissions. In point source testing, effluent gas samples are usually collected from a stack using probes inserted through a port in the stack wall.
- Pollutants in the gas sample are collected in or on various media that are subsequently sent to a laboratory for analysis.
- Industrial hygiene data (concentrations) can be used in conjunction with exhaust system flow rates to calculate fugitive emissions from a room, floor, or building. Direct-reading instruments may be utilized
- that may be used to obtain an instantaneous reading of vapor concentrations include
- photoionization detectors, portable infrared spectrophotometers, and portable gas chromatographs (NPCA, 1995).

12 - 14

Test Data

- Use of stack and/or industrial hygiene test data is likely to be the most accurate method of quantifying air emissions from paint, ink, and other coating manufacturing operations.
- Collection and analysis of air samples from manufacturing facilities can be very expensive and especially complicated for coating manufacturing facilities where a variety of VOCs are emitted and where most of the emissions may be fugitive in nature.
- Test data from one specific process may not be representative of the entire manufacturing operation and may provide only one example (a snapshot) of the facility's emissions.

12 - 15

Test Data

- Test data needs to be representative and needs to be collected over a period of time that covers production of multiple coating formulations. It may be necessary to sample multiple production areas.
- In addition, these methods do not address fugitive emissions that occur outside of a building. If testing is performed, care should be taken to ensure that a representative operational cycle has been selected.
- Full cycles should be monitored as opposed to portions of cycles, when possible
- VOC losses from certain operations (e.g., filling of containers) may also be measured by performing a study using a gravimetric analysis such as American Society for Testing and Materials (ASTM) Standard D2369: *Test Method for Volatile Content of Coatings*.¹⁶

- **Case Study 8.3-1: The Bright Blue Paint Company (in handout)**
- Description
- The Bright Blue Paint Company produces a variety of related paint products that can be considered to have similar formulations. The total production rate is about 2,500,000 gal/yr.
- The four main manufacturing operations at the Bright Blue Paint Company are:
 - Preassembly and premix;
 - Pigment grinding/milling;
 - Product finishing/blending; and
 - Product filling/packaging.
- .

12 - 17

- The batch begins with mixing of raw materials in a high speed disperser. The material from the disperser is then transformed to a thindown tank where additional solvent is added. The final product is then transferred to shipping containers. Total batch size is about 1,700 gallons.
- Liquid storage of paint ingredients and cleaning compounds is in bulk tanks ranging from 2,500 to 10,000 gallons and in 55-gallon drums. Powder ingredients are stored in paper sacks or fiber drums ranging from 10 to 200 pounds.
- Equipment is cleaned after each batch. Approximately 75,000 gallons of cleaning solvents are used for equipment cleaning each year. Small parts are also cleaned as necessary using an open-top vapor degreaser.

12 - 18

Example Problem in Handout

12 - 19

Volume II: Chapter 16

**Methods for Estimating Air Emissions
from Chemical Manufacturing Facilities**

August 2007
Final



Prepared for
Emission Inventory Improvement Program

Prepared by
Mitchell Scientific, Inc.
Westfield, NJ
RTI International
Research Triangle Park, NC
12-20

- The majority of emissions that occur from batch chemical manufacturing operations are from volatile organic solvents that evaporate during manufacturing.
- Particulate matter emissions may also occur from the handling of solid powders that are used in manufacturing.
- Several air emission sources have been identified for chemical manufacturing operations; they are as follows: Process operations

12 - 21

- Process operations
- Storage tanks
- Equipment leaks
- Wastewater collection and treatment
- Cleaning Solvent recovery
- Spills

12 - 22

- When a solvent or volatile process mixture is charged into a process vessel then material losses will occur though the process vent in the form of solvent vapors. The amount of solvent that is emitted during this displacement operation is a function of the
- (1) volume of liquid entering the tank,
- (2) the equilibrium vapor pressure of each component that is contained in the inlet stream and/or present in the vessel before the filling operation begins, and
- (3) degree of saturation of the associated vapors. The resulting emission rate is simply a function of how quickly the filling operation takes place. 5

12 - 23

**Specific Process Operations
Emissions Points**

- Material Charging
- Process heating
- Process Depressurization
- Gas Evolution
- Gas sweep and purge operations
- Surface evaporation
- Solvent reclamation
- Cleaning
- Wastewater treatment
- Storage tanks
- Equipment leaks and spills

12 - 24

Vessel Filling

- When a solvent or volatile process mixture is charged into a process vessel then material losses will occur though the process vent in the form of solvent vapors.
- The amount of solvent that is emitted during this displacement operation is a function of the
- (1) volume of liquid entering the tank,
- (2) the equilibrium vapor pressure of each component that is contained in the inlet stream and/or present in the vessel before the filling operation begins, and
- (3) degree of saturation of the associated vapors. The resulting emission rate is simply a function of how quickly the filling operation takes place.

12 - 25

Vessel Filling

- The equilibrium vapor pressure for each volatile component in the system is calculated by applying Raoult's Law to the pure vapor pressure and the mole fraction of each compound in the inlet stream and/or initial vessel contents.
- If non-idealities exist between molecules in the system then activity coefficient may be used to adjust the vapor pressures accordingly.
- The calculated equilibrium vapor pressure represents the gas space composition assuming that the degree of vapor saturation is 100%.
- It is highly possible that the actual saturation level of the solvent vapors may be less than the assumed 100% level.

12 - 26

Vessel Filling

- Displacement emissions that are caused by charging operations may be calculated using the ideal gas law on the volume of gas that is emitted. This equation assumes that the partial pressure of component i in the vent gas is at saturated levels.
- Ideal Gas Law:
- $E_{n-i} = p_i V / RT$ Equation 3.1
Where: E_{n-i} are the moles of component i that are emitted due to vapor displacement
 p_i is the saturated vapor pressure of component i.
 V is the displacement volume that was caused by the filling operation.
 R is the ideal gas constant in consistent units,
 T is the temperature of the liquid being charged

12 - 27

Charging an Empty Vessel

- When a solvent mixture is being charged to an empty vessel then the vapor composition for the displacement calculation may be made based entirely upon the inlet stream composition.
- $p_i = x_i \gamma_i P_i$ Eq. 3-2
- Where:
 - p_i = effective vapor pressure for component i
 - x_i = mole fraction of component i
 - γ_i = component activity coefficient (Becomes 1.0 when Raoult's Law applies)
 - P_i = pure component pressure i

12 - 28

Charging a Pure Solvent To An Empty Vessel.

- A 5,000 gallon reactor is filled at ambient conditions (25°C and 1 atm) with 3,600 gallons of hexane in one hour. The empty vessel was previously made inert with nitrogen, and the vessel is vented to atmosphere. Calculate the vapor emissions from this process.
- Step 1. The displaced gas is defined by the following conditions.
- $T = 25^{\circ}\text{C} = 298^{\circ}\text{K}$ (System temperature)
- $P_{\text{System}} = 1.0 \text{ atm} = 760 \text{ mm Hg}$ (Total system pressure)
- $V_{\text{displacement}} = 3600 \text{ gal} = 481.28 \text{ ft}^3$
- (Displacement volume) Time = 1 hr (Time for event)

12 - 29

Constants and Relationships:

Universal Gas Constant: $R = 998.9 \frac{\text{mmHg} \cdot \text{ft}^3}{\text{lb-mole} \cdot ^{\circ}\text{K}}$

Antoine Equation: $P_i = \exp\left(a - \frac{b}{T + c}\right)$

Gas Law: $n = \frac{PV}{RT}$ also $n_i = \frac{P_i V}{RT}$ for component i in the gas space.

Sum of the partial pressures in the gas space: $P_T = \sum_{i=1}^N p_i$

Sum of component moles in the gas space: $N_T = \sum_{i=1}^N n_i$

12 - 30

Step 2 Calculate the amount of each component in the displaced gas.

Hexane is the only component in the liquid, so the vapor pressure for hexane is only a function of the system temperature, 25°C. The partial pressure of nitrogen is determined by the difference between the total system pressure, 760 mm Hg, and the partial pressure of hexane. The vapor pressure of hexane may be calculated from the Antoine equation as follows:

$$p_{\text{hexane}} = \exp\left(15.8366 - \frac{2697.55}{298.15 - 48.78}\right) = \exp(5.019) = 151.28 \text{ mmHg}$$

therefore $p_{N_2} = P_T - p_{\text{hexane}} = 760 \text{ mmHg} - 151.28 \text{ mmHg} = 608.719 \text{ mmHg}$

Ideal Gas Law: $E_{\text{hexane}} = \frac{p_{\text{hexane}} V}{RT} = \frac{151.281 \text{ mmHg} \cdot 481.28 \text{ ft}^3}{(998.9)(25^\circ\text{C} + 273.15)} = 0.244 \text{ lb-moles}$

12 - 31

Step 3. Calculate the emission rate based on the 1 hour addition.

Emission Rates: $E_{R-\text{hexane}} = \frac{21.03 \text{ lb}}{1.0 \text{ hr}} = 21.03 \frac{\text{lb}}{\text{hr}}$

$E_{R-N_2} = \frac{27.56 \text{ lb}}{1.0 \text{ hr}} = 27.56 \frac{\text{lb}}{\text{hr}}$

12 - 32

- A 50-50 volume percent solvent mixture of heptane and toluene is charged to a surge tank at a rate of 50 gal/min. A total of 1,500 gal of mixed solvent is charged at 20°C.
- Step 1. Define conditions of the displaced gas:
- T = 20°C = 298.15°K (System temperature)
- PT = 1.0 atm = 760 mm Hg (Total system pressure)
- Vdisp = 1,500 gal = 200.53 ft3 (Displacement volume)
- Time = 5 min (Time for event)

12 - 33

Constants and Relationships:

Universal Gas Constant: $R = 998.9 \frac{\text{mmHg} \cdot \text{ft}^3}{\text{lb-mole} \cdot ^\circ\text{K}}$

Antoine Vapor Pressure Equation: $P_i = \exp\left(a - \frac{b}{T+c}\right)$

Gas Law: $n = \frac{PV}{RT}$, also $n_i = \frac{p_i V}{RT}$ for a single component i in the gas space.

Sum of the partial pressures in the gas space: $P_T = \sum_{i=1}^N p_i$

Sum of component moles in the gas space: $N_T = \sum_{i=1}^N n_i$

12 - 34

Step 2. Calculate the vapor-phase mole fractions:

VOC	Mol. Wt. lb/lbmole	Density lb/gal	Volume Charged	Weight Charged	lb-moles	Xi
Heptane	100.205	5.6977	750	4,273.3	42.65	0.42
Toluene	92.13	7.2138	750	5,410.3	58.72	0.58
Total					101.37	1.00

- In this problem, heptane and toluene coexist in a miscible liquid. The vapor space partial pressure for each compound may be estimated from the pure component pressure and liquid composition using Raoult's Law. It is assumed that the vessel contains nitrogen as the remaining gas component. Pure component vapor pressures for the liquid components may be estimated using the Antoine equation.

12 - 35

$$P_{\text{heptane}} = \exp\left(15.8737 - \frac{2911.32}{293.15 - 56.51}\right) = \exp(3.571) = 35.55 \text{ mmHg}$$

$$P_{\text{toluene}} = \exp\left(16.0137 - \frac{3096.52}{293.15 - 53.67}\right) = \exp(3.0835) = 21.84 \text{ mmHg}$$

VOC	Xi	Pi (mm Hg)	pi (mm Hg)
Heptane	0.42	35.55	14.93
Toluene	0.58	21.84	12.67
Nitrogen	0.0		732.40

12 - 36

Ideal Gas Law:

$$E_{n-heptane} = \frac{P_{heptane} V}{RT_{sys}} = \frac{14.93 mmHg \cdot 200.53 ft^3}{(998.9)(293.15)} = 0.0102 lb - moles$$

$$n_{n-toluene} = \frac{P_{toluene} V}{RT_{sys}} = \frac{12.67 mmHg \cdot 200.53 ft^3}{(998.9)(293.15)} = 0.0087 lb - moles$$

$$n_{nitrogen} = \frac{P_{air} V}{RT_{sys}} = \frac{732.40 mmHg \cdot 200.53 ft^3}{(998.9)(293.15)} = 0.5015 lb - moles$$

12 - 37

Step 3. Calculate the emission rate in
 lb/hr units.

- Since 1,500 of solvent mixture is charged at 50 gpm the complete charge is completed in 30 minutes.

$$E_{R-heptane} = 1.02 lbs \left(\frac{60 min/hr}{30 min} \right) = 2.04 lbs / hr$$

$$E_{R-toluene} = 0.80 lbs \left(\frac{60 min/hr}{30 min} \right) = 1.6 lbs / hr$$

$$E_{R-nitrogen} = 14.05 lbs \left(\frac{60 min/hr}{30 min} \right) = 28.1 lbs / hr$$

12 - 38

Charging a mixture to a partially filled vessel
 (subsurface addition)

- Three hundred gallons of acetone at 20°C are to be added to the vessel featured in Illustration 2 by way of subsurface addition. For this problem, the initial contents of the vessel are 1,500 gallons of a mixture of heptane (42% mole fraction) and toluene (58% mole fraction) at 20°C. The system pressure is 760 mm Hg and the addition process is complete in 0.5 hour.
- Step 1. Define conditions of the displaced gas.
- T = 20°C = 298.15°K (System temperature)
- PT = 1.0 atm = 760 mm Hg (Total system pressure)
- V_{disp} = 300 gal = 40.1 ft3 (Displacement volume)
- Time = 30 min (Time for event) Acetone = 6.5632 lb/gal @ 20°C

12 - 39

Constants and Relationships:

Universal Gas Constant: $R = 998.9 \frac{\text{mmHg} \cdot \text{ft}^3}{\text{lb} - \text{mole} \cdot ^\circ\text{K}}$

Antoine Vapor Pressure Equation: $P_i = \exp\left(a - \frac{b}{T+c}\right)$

Gas Law: $n = \frac{PV}{RT}$, also $n_i = \frac{p_i V}{RT}$ for a single component i in the gas space.

Sum of the partial pressures in the gas space: $P_T = \sum_{i=1}^N p_i$

Sum of component moles in the gas space: $N_T = \sum_{i=1}^N n_i$

12 - 40

Step 2. Calculate the dilution factors for the inlet stream and the initial vessel contents.

Inlet Stream Analysis:

VOC	Mol. Wt. lb/lbmole	Density lb/gal	Volume Charged	Weight Charged	lb-moles	Xi
Acetone	58.08	6.5632	300	1968.96	33.90	1.00
Total					33.90	1.00

Initial Vessel Contents Analysis:

VOC	Mol. Wt. lb/lbmole	Density lb/gal	Volume Charged	Weight Charged	lb-moles	X _i
Heptane	100.205	5.6977	750	4,273.3	42.65	0.42
Toluene	92.13	7.2138	750	5,410.3	58.72	0.58
Total					101.37	$\frac{100}{101.37}$

Calculate the inlet stream dilution factor:

From Eq 3.5:

$$\bar{\phi}_A = 1 + \frac{N_B}{N_A} \ln \left(\frac{N_B}{N_A + N_B} \right)$$

$$\bar{\phi}_A = 1 + \frac{101.37}{33.90} \ln \left(\frac{101.37}{33.90 + 101.37} \right)$$

$$\bar{\phi}_A = 1 + 2.99 \ln(0.7494) = 0.14$$

12-42

Calculate the dilution factor for the initial vessel contents:

From Eq 3.7

$$\bar{\phi}_B = -\frac{N_B}{N_A} \ln\left(\frac{N_B}{N_A + N_B}\right)$$

$$\bar{\phi}_B = -\frac{101.37}{33.90} \ln\left(\frac{101.37}{33.90 + 101.37}\right)$$

$$\bar{\phi}_B = -2.99 \ln(0.7494) = 0.86$$

12 - 43

Step 3. Calculate the average batch and vapor-phase compositions.

VOC	Xi	φA, φB	\bar{X}_i	Pi (mm Hg)	pi (mm Hg)
Acetone	1.00	0.14	0.14	184.80	25.87
Heptane	0.42	0.86	0.36	35.55	12.80
Toluene	0.58	0.86	0.50	21.84	10.92
Nitrogen					710.41
Total	1.00		1.00		760.00

12 - 44

Ideal Gas Law:

$$E_{n-acetone} = \frac{p_{acetone}}{RT_{sys}} V = \frac{25.87mmHg \cdot 40.1ft^3}{(998.9)(293.15)} = 0.00354 \text{ lb-moles}$$

$$E_{n-heptane} = \frac{p_{heptane}}{RT_{sys}} V = \frac{12.83mmHg \cdot 40.1ft^3}{(998.9)(293.15)} = 0.00176 \text{ lb-moles}$$

$$E_{n-toluene} = \frac{p_{toluene}}{RT_{sys}} V = \frac{10.92mmHg \cdot 40.1ft^3}{(998.9)(293.15)} = 0.0015 \text{ lb-moles}$$

$$E_{n-nitrogen} = \frac{p_{nitrogen}}{RT_{sys}} V = \frac{710.41mmHg \cdot 40.1ft^3}{(998.9)(293.15)} = 0.0973 \text{ lb-moles}$$

12 - 45

Emission level:
$$E_{\text{nit-acetone}} = (0.00354 \text{ lb-moles}) \left(58.08 \frac{\text{lbs}}{\text{lb-mole}} \right) = 0.21 \text{ lbs}$$

$$E_{\text{nit-heptane}} = (0.00176 \text{ lb-moles}) \left(100.205 \frac{\text{lbs}}{\text{lb-mole}} \right) = 0.18 \text{ lbs}$$

$$E_{\text{nit-toluene}} = (0.0015 \text{ lb-moles}) \left(92.13 \frac{\text{lbs}}{\text{lb-mole}} \right) = 0.14 \text{ lbs}$$

$$E_{\text{nit-nitrogen}} = (0.0973 \text{ lb-moles}) \left(28.0134 \frac{\text{lbs}}{\text{lb-mole}} \right) = 2.73 \text{ lbs}$$

12 - 46

Step 4. Calculate the emission rate in lb/hr units.


$$E_{R-\text{acetone}} = \frac{0.21 \text{ lbs}}{0.5 \text{ hr}} = 0.42 \text{ lbs / hr}$$

$$E_{R-\text{heptane}} = \frac{0.18 \text{ lbs}}{0.5 \text{ hr}} = 0.36 \text{ lbs / hr}$$

$$E_{R-\text{toluene}} = \frac{0.28 \text{ lbs}}{0.5 \text{ hr}} = 0.56 \text{ lbs / hr}$$

$$E_{R-\text{nitrogen}} = \frac{2.73 \text{ lbs}}{0.5 \text{ hr}} = 5.46 \text{ lbs / hr}$$

12 - 47

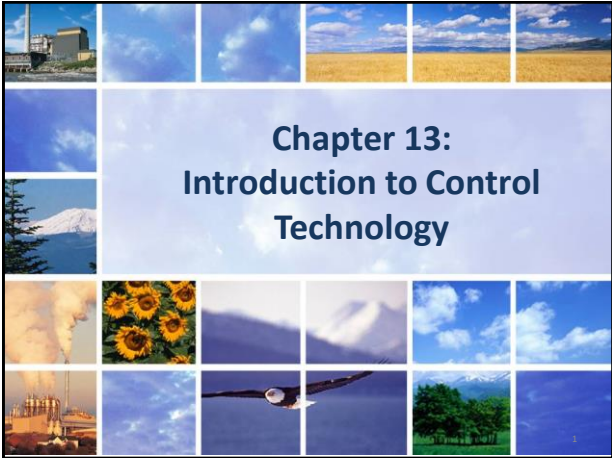

Introduction to Control Technology

- Oxidation
- Carbon adsorption
- Condensation
- Bioreaction

13-2

Oxidation Systems



Types of Oxidizers

- Thermal Oxidation
 - Direct Flame
 - Flares
 - Process Boilers used for thermal oxidation
- Catalytic Oxidation


13-4

Types of Heat Exchangers for Oxidation System

- **Recuperative:** Heat is transferred through a metal surface in a tubular or plate heat exchanger.
- **Regenerative:** Heat is transferred using two or more ceramic packed beds that alternately store and release heat.
 - *Particulate matter* can plug the packed bed.
 - Can resist corrosion from *acid gases*.

13-5

Recuperative Heat Exchanger

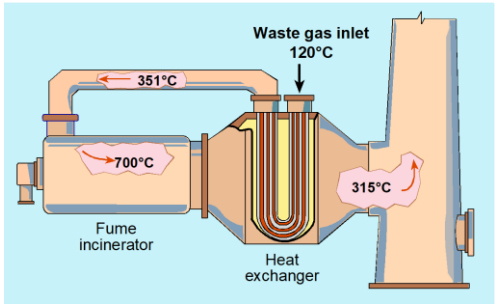


Heat recovery in range of 40% to 65% of the total heat released in the combustion chamber.

13-6

Regenerative Thermal Oxidizers


Heat recovery efficiencies as high as 95%.

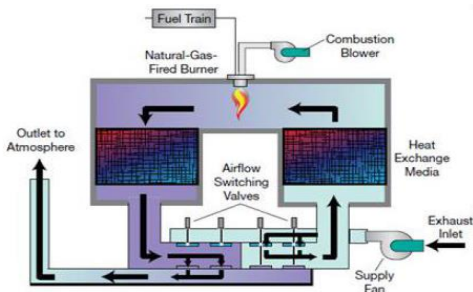

- Inlet gas stream is passed through a large packed bed containing preheated ceramic packing.
- Product gas preheats a second bed containing ceramic packing.
- Flow directions are switched periodically.

13-7

Regenerative Thermal Oxidizer

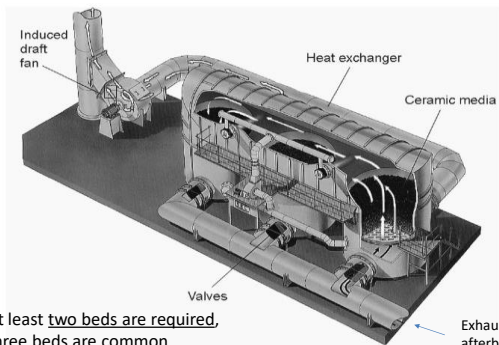

At least two beds are required, three beds are common

13-8

Process Boilers Used for Thermal Oxidation

- Most plants equipped with one or more process boilers
- Combustion chamber temperatures in excess of 1800°F
- Flue gas residence times in excess of 1 to 2 seconds
- The flow rate of the organic-contaminated stream must not overwhelm the gas-handling capability of the boiler
- Operating schedules of boiler and oxidizer feed gas must match
- In long ductwork (sometimes needed), VOC can condense

13-9

Advantages and Disadvantages of Using a Boiler as an Afterburner

Advantages	Disadvantages
1. Large capital expenditure not required.	1. If air contaminant volumes are relatively large, boiler fuel cost may be excessive.
2. Boiler serves dual purpose as source of process steam and as an air pollution control device.	2. High maintenance cost may be required because of burner and boiler tube fouling.
3. Auxiliary fuel not required for operation of air pollution control device.	3. Boiler must be fired at an adequate rate at all times when effluent is vented to the fire-box, regardless of steam requirements.
4. Operating and maintenance cost limited to one piece of equipment.	4. Normally, two or more boilers must be used, one as standby during shutdowns.
5. Fuel saving, if effluent has some calorific value (rare instances).	5. Pressure drop through boiler may be excessive if large volume of effluent introduced into boiler causes back pressure on exhaust system.

Source: Air Pollution Engineering Manual EPA 1973

13-10

Flares

Flares are often used at chemical plants and petroleum refineries to control VOC vents and get rid of excess gas.



13-11

Flares

- Have destruction efficiencies exceeding 98%.
- Flares can be used to control almost any VOC stream, and can handle fluctuations in
 - VOC concentration,
 - flow rate, &
 - heating value.
- Feed composition may exceed UEL
- Can be elevated or at ground level



13-12


Flare Types

Elevated Flares



- Tall (usually > 100 ft.)
- Operate intermittently
- Handle large volumes of gas
- Used for emergency, maintenance, or upsets
- Combustion at the tip of the

Ground Level Flares



- Short (usually < 100 ft)
- Operate continuously
- Low volumes of gas from routine operations
- Mainly used at landfills
- Combustion zone in stack.

13-13


Smokeless Flares

- If a waste gas pressure (momentum) is inadequate & causes smoke, then steam or air are used to make it smokeless.
- **Steam assist:** uses high-pressure steam to provide more momentum (than just “forced air”) which will enhances air-fuel mixing (turbulence).
- **Air-assisted flare** is good when steam is not available or freezing is an issue.

13-14



Steam-assisted Flare Tip

- Steam is injected into the combustion zone to promote turbulence for mixing and to induce air into the flame.
- They account for the majority of the flares installed and are the predominant flare type found in refineries and chemical plants.



13-15

Air-assisted Flares

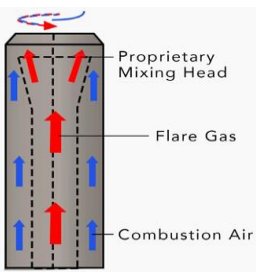


- Air-assisted smokeless combustion is achieved by supplying primary air with a low-pressure fan to provide turbulence to mix the flare gas and air.
- These flares are built with a spider-shaped burner located inside near the top of the flare.


13-16

Federal Flare Regulations: NSPS 40 CFR § 60.18

- Pilot flame: requires the presence of a continuous flame.
- Tip Exit Velocity: operated with an exit velocity > 60 ft/sec.
 - An exit velocity > 60 ft/sec but < 400 ft/sec may be used if the net heating value of the combustion gas is sufficiently high.
 - At *too high an exit velocity*, the flame can lift off the tip and flame out, while at *too low a velocity*, it can burn back into the tip or down the sides of the stack.
- Min Net Heating Value of the gas being combusted is 300 BTU/SCF for steam & air-assisted. (200 BTU/SCF if the flare is non-assisted.)
- No visible emissions A five-minute exception period is allowed during any two consecutive hours.
- Leak detection monitoring and record keeping requirements.
- Similar (& more extensive) requirements for **Petroleum Refineries** flares codified at **NESHAP 40 CFR § 63.670**.

13-17

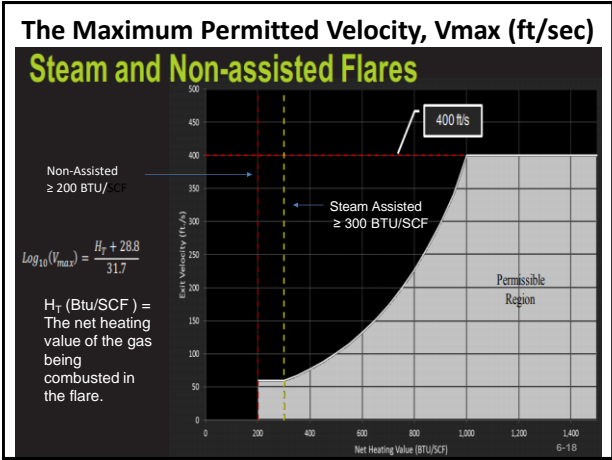

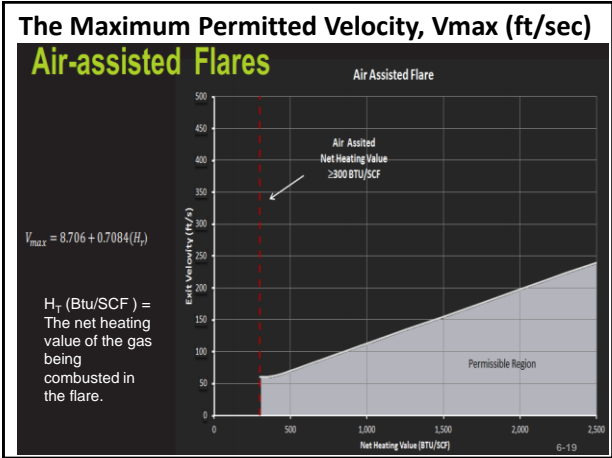


Safety and Operational Problems of Flares

- Thermal radiation: heat given off to the surrounding area may be unacceptable
- Light: may be a nuisance
- Noise: jet-venturi used for mixing at the flare tip can cause excessive noise
- Smoke
- Energy consumption: waste energy because of the need to maintain a constant pilot flame

13-20

Catalytic Oxidation

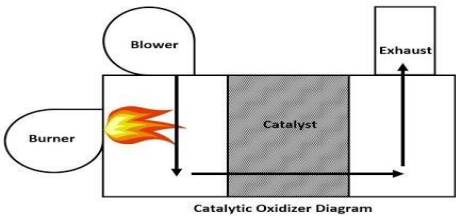

- A waste gas is passed through a catalyst bed, which causes the oxidation reactions to proceed at a *much lower temperature* than in a thermal oxidation.
- A catalytic oxidizer operating at 600°F to 850°F can achieve the same efficiency as a thermal oxidizer operating between 1,000°F and 2,000°F.

13-21

Catalytic Oxidation Systems

- The exothermic oxidation reaction in the *catalyst bed* results in an increased gas temperature by 50°F to 300°F.
- Good for treatment of very low VOCs concentration (odors).
- Destruction efficiency is over 90%

13-22

Advantages and Disadvantages

- Advantages
 - Lower temperatures
 - Reduced supplemental fuel requirements (in some cases may only be required during start-up)
- Disadvantages
 - Cost of the catalyst
 - Performance problems related to physical and chemical deterioration of catalyst activity
 - Catalyst beds generally last 2 to 5 years


13-23

Stationary Sources that Use Catalytic Incineration

- Surface coating and printing operations widely use catalytic incineration, the others are:
- Varnish cookers;
- Foundry core ovens;
- Filter paper processing ovens;
- Plywood veneer dryers;
- Gasoline bulk loading stations;
- Process vents in the synthetic organic chemical manufacturing industry (SOCMI);
- Rubber products and polymer manufacturing; and
- Polyethylene, polystyrene, and polyester resin manufacturing.

13-24


Cutaway of a Catalytic Oxidizer

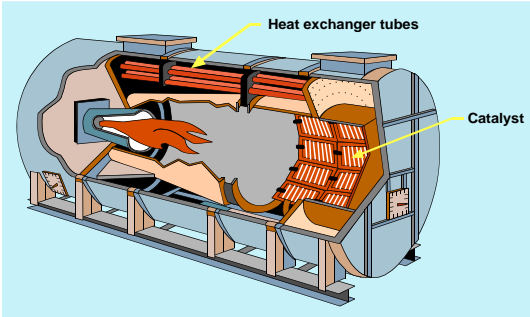

There is no need for refractory lined combustion chambers due to the low combustion temperatures (this reduces the weight).

13-25

Catalytic Incinerator

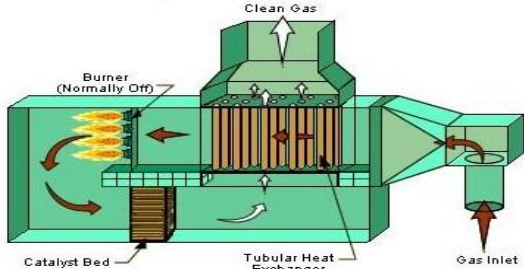

-Auxiliary fuel, in combination with the preheat from the primary heat exchanger, is used to preheat the waste gas to the reactor inlet temperature.
-The inlet temperature to the catalyst bed itself must be above the catalytic ignition temperature required to give the desired destruction efficiency in the incinerator.

13-26

The Inlet Temperature to the Catalyst Bed

Catalyst Ignition Temperatures Required for Oxidizing 80% of Inlet VOC to CO₂, for 2 Catalysts


Compound	Temperature, °F	
	CO ₂ O ₄	Pt - Honeycomb
acrolein	382	294
n-butanol	413	440
n-propylamine	460	489
toluene	476	373
n-butyric acid	517	451
1, 1, 1-trichloroethane	661	>661
dimethyl sulfide	-	512

- The inlet temperature to the catalyst bed must be above the catalytic ignition temperature required to give the desired destruction efficiency in the incinerator.
- The catalyst's inlet temperature must be chosen to be sufficiently high to avoid adsorptive effects by the pollutants on the catalyst.
- It is impossible to predict the temperature needed for a mixture of VOCs. This is because the temperature required for different VOCs on a given catalyst can vary significantly.

13-27

Catalyst Bed Honeycombs

- The catalyst bed (or matrix) is generally a metal-mesh mat, ceramic honeycomb, or other ceramic matrix structure designed to maximize catalyst surface area.

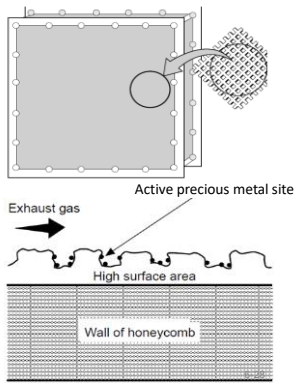

Common Types of Catalyst Materials

- **Noble Metals:** *Platinum, Palladium, & Rhodium*
 - Widely used for VOC incineration
 - This preference is due to their high activity, wide operating temperature range, thermal durability, and resistance to deactivation.
 - *Platinum catalysts* are used for oxidation of *sulfur containing VOCs*, although they are rapidly deactivated by the presence of *chlorine*.
- **Metal Oxides:** *chromium oxide, magnesium oxide, & cobalt oxide* (also used for VOC oxidation)
 - *Metal oxides* used when *halogens* are present, because the *chlorine and fluorine* will deactivate the noble metal catalysts.
- The particular catalyst chosen:
 - Depends on the VOCs that are to be treated.
 - Must be selective to the resistant to deactivation by the VOCs and by other materials present in the gas stream.

13-29

Fouling & Masking:
Reduction of Catalyst Activity

- **Fouling:** deposits on the surface of the catalyst and blocks the access of the organic compounds, may be reversible.
 - **Particulate matter**
 - **Oil droplets** (unless they are vaporized in the preheat section)
- **Masking:** occurs when materials are adsorbed to some catalytic surfaces, reducing the active sites available to the organic compounds (reversible).
 - **Sulfur & halogens compounds**

13-30

Catalyst Poisons

- Certain metals react irreversibly with catalyst, thereby making it inactive (called *catalyst poisoning*). Catalyst poisons can be divided into two categories:
 - (1) **fast acting poisons**: phosphorus, bismuth, arsenic, antimony and mercury, &
 - (2) **slow acting poisons**: iron, lead, tin, & silicon.

13-31

High Temperature and Catalyst Life

- All catalysts deteriorate with normal use.
- High temperatures can accelerate catalyst deactivation
 - The desired catalyst bed outlet temperature is typically 700 to 900°F
 - The maximum temperature to which the catalyst bed can be exposed continuously is limited to about 1200°F. (*EPA Cost Manual*)
- Lower operating temperatures generally result in a longer service life.

13-32


Typical Ranges for Catalyst Service Life

Industry	Typical Compounds Treated	Number of Years Before Catalyst Replacement
Can Coating	MIBK, Mineral Spirits, Isophorone, DIBK, Butyl Cellosolve	7 to 14
Metal Coatings	MEK, MIBK, Toluene, i-Butanol	7 to 10
Automotive Paint Bake	MEK, Toluene, Xylene, Isopropyl alcohol	5 to 14
Glove Manufacturing	Formaldehyde, Phenolics	5
Phthalic Anhydride	PA, MA, S	16
Synthetic Fabrics	Scotchguard, Thermosol Dye	5

13-33

Outlet Temperature from the Catalyst

- An outlet temperature from the catalyst, must be specified that will ensure the desired level of destruction of the VOC stream (this value varies from compound to compound and also varies from catalyst to catalyst).

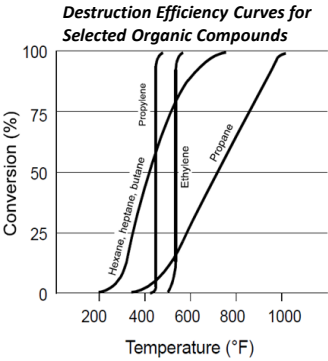


13-34

Catalytic Oxidation Systems

- The overall rate of catalytic oxidation depends on:
 - Rate of mass transfer (diffusion of the VOC to the surface of the catalyst) &
 - The rate of the chemical oxidation reactions on the catalyst (reaction kinetics)
- The temperature of the catalytic oxidizer is set at a level at which the controlling factor is the rate of mass transfer.
- Destruction Efficiency is a function of length of the catalyst bed & mass transfer rates (see “Air Pollution Control” by Cooper & Alley 3rd Ed. page 344).

13-35

Importance of Temperature in Catalytic Systems

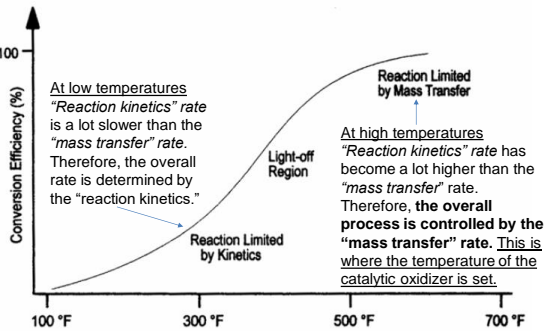

Source: APTI 455 Chapter 3

TEMPERATURE

13-36

Space Velocity

- The amount of catalyst required in a catalytic oxidizer depends on the *space velocity*.
- **Space velocity** is defined as the volumetric flow rate (at standard conditions) of gas entering the catalyst bed chamber divided by the volume of the catalyst bed:
 - **Space velocity (hr⁻¹) = Flow rate/Bed Volume**
- The greater the reactivity of the catalyst, the higher the space velocity and the lower the volume of catalyst required for VOC destruction.

13-37


Space Velocity & Destruction Efficiency for Catalytic Incinerator System

Required Destruction Efficiency (%)	Temperature at the Catalyst Bed Inlet °F	Temperature at the Catalyst Bed Outlet °F	Space Velocity- SV (hr ⁻¹) SV = Flow rate/Bed Volume	
			Base Metal	Precious Metal
95	600	1000 - 1200	10,000 – 15,000	30,000 – 40,000

- Space velocities (SV) range from 10,000 hr⁻¹ to 100,000 hr⁻¹.


13-38

Thermal Oxidizer (with outside air)

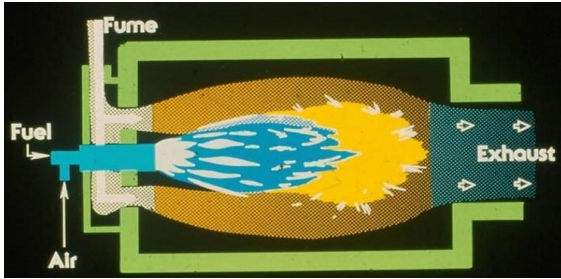

- Due to these very high temperatures, thermal oxidizers are refractory-lined combustion chambers.
- Thermal oxidizers usually provide VOC destruction efficiencies that exceed 95% and often exceed 99%.

13-39

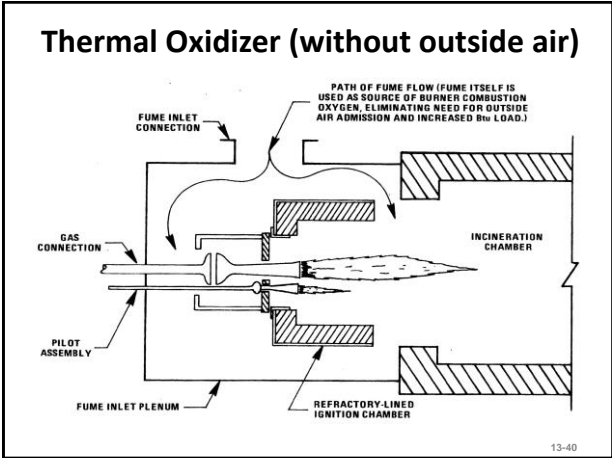


Principles of Operation

Complete combustion is achieved by considering the **three —T’s of combustion**

- **Time** (at the desired temperature)
 - 0.5 to 2.0 seconds
 - Time must be allowed for the chemical kinetic reaction to occur.
- **Temperature**
 - 1200 to 1800 °F
- **Turbulence:** The organic-containing waste gases must be thoroughly mixed with the burner combustion gases to ensure complete combustion.

13-41

Turbulent Flow Created by Baffles in a Thermal Oxidizer

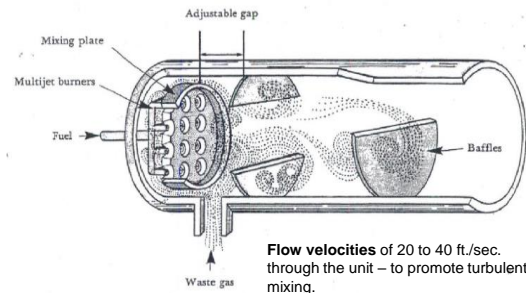

Turbulent flow is needed to ensure that the oxidizer feed is well-mixed with the products from the supplemental fuel burners and that none of the pollutants are allowed to bypass the zone of maximum temperature.

13-42

Residence Time

- Usually between 0.3 and 2 seconds

$$t = \frac{V}{Q}$$

Where:

t=Residence time, sec


V=Chamber volume, ft³

Q=Actual gas volumetric flow rate at combustion conditions, ft³/sec

(Note: Adjustments to the flow rate must include any outside air added for combustion.)

13-43

The Effects of Time and Temperature

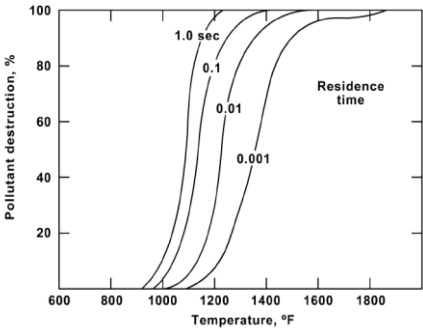

As residence time increase, you can operate at lower temperatures to get the same destruction efficiency.

13-44

The Effects of Operating Temperature

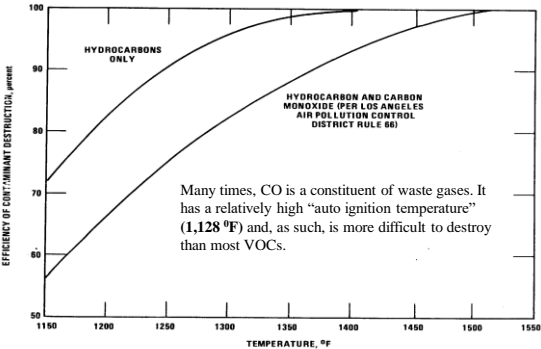


Figure 3-12: Typical effect of operating temperature on effectiveness of thermal afterburner for destruction of hydrocarbons and carbon monoxide.

13-45

Table 51. RECOMMENDED AFTERBURNER
OPERATING TEMPERATURES

Operation	Recommended temperature, ° F
Carpet laminating	1200 - 1400
Core oven	1400
Cloth carbonization	1800
Deep fat fryers	1200
General opacity problems	1200 - 1400
Odor control	1300 - 1500
Oil and grease smoke	1200 - 1400
Paint bake ovens	1200 - 1500
Pipe wrapping	1400
Rendering operations	1200
Smokehouse	1200
Solvent control	1300 - 1500
Varnish cookers	1200
Vinyl plastisol curing	1200 - 1400

Source: Air Pollution Engineering Manual 1973

13-46

Examples

- Hazardous waste incinerator
 - **99.99%** destruction removal efficiency (DRE) for hazardous VOCs & **99.9999** DRE for waste that contain dioxin & furans (required by NESHAP 40 CFR Part 63 Subpart EEE)
 - Would need about 2000 °F.(depends on compounds burned) & minimum of 2 seconds residence time (studies).
- Medical waste incinerator
 - Regulated by NSPS 40 CFR Part 60 Subpart Ce &Ec
 - Subpart Ce: state guidelines for existing sources &
 - Subpart Ec for new sources
 - Both give numerical emissions limits for certain pollutants, etc.
 - Would need about 1600°F & 1.0 second residence time (studies).

13-47

Table 2.1: Theoretical Reactor Temperatures Required for 99.99 Percent Destruction by
Thermal Incineration for a 1-Second Residence Time [1]

Source: EPA Cost Manual 2000

Compound	Temperature, °F
acrylonitrile	1,344
allyl chloride	1,276
benzene	1,350
chlorobenzene	1,407
1,2-dichloroethane	1,368
methyl chloride	1,596
toluene	1,341
vinyl chloride	1,369

The majority of hazardous waste incinerators are operated from 1,200 °F to 3,000 °F. Residence time usually ranges from 0.5 to 2.0. Turbulent mixing is important. (EPA On Site Incineration – Superfund 1998)

13-48

Destruction Efficiency

- The means for estimating VOC destruction efficiency of thermal oxidation systems is a function of retention time, operating temperature, flame contact (turbulence), velocity.
- There is no quantitative mathematical relationship that relates efficiency to these variables because the **kinetics of combustion** flow are complex & kinetic data is scarce & costly to obtain from pilot plant studies.
- Selection of thermal oxidizer operating parameters to achieve optimum VOC destruction is best left to companies that have accumulated years of operating data at a variety of conditions.

13-49

Auto-Ignition Temperature

- VOC destruction rates are difficult to quantify from a purely theoretical standpoint. No parameter has a greater impact on VOC destruction than the **operating temperature of the thermal oxidizer**.
- A generally accepted method (old) of determining the temperature required for destruction of an organic compound is its **Auto-Ignition Temperature**.

13-50

Auto Ignition Temperatures

Table 6-1. Auto-ignition temperatures.		Destruction Efficiency %	Degrees Above Auto-ignition Temp °F	Residence Time (sec)
Compound	Auto-Ignition Temperature (°F)			
Acetone	870	95	300	0.5
Acetonitrile	970			
Isopropyl Alcohol (IPA)	780	98	400	0.5
Methanol	878			
Methyl Ethyl Ketone (MEK)	759	99	475	0.75
Toluene	896	99.9	550	1.0
Xylene	867	99.99	660	2.0

- The **auto ignition temperature** is the minimum temperature at which a gas will combust in the presence of oxygen in the absence of a spark or flame.
- Most oxidizers operate at temperatures **200°F to 300°F above the auto-ignition temperature** of the most difficult to oxidize compound.

13-51

Auto-Ignition Temperatures

Auto Ignition Temp °F - Compound		Auto Ignition Temp °F - Compound	
869	Acetone	490	Kerosene
1,204	Ammonia	890	Maleic anhydride
1,097	Benzene	999	Methane
840	Butadiene	878	Methanol
693	Butanol	960	Methyl ethyl ketone
257	Carbon disulfide	1,224	Methylene chloride
1,128	Carbon monoxide	475	Mineral spirits
1,245	Chlorobenzene	475	Petroleum naphtha
1,185	Dichloromethane	924	Nitrobenzene
403	Dimethyl sulfide	1,084	Phthalic anhydride
950	Ethane	874	Propane
907	Ethyl acetate	940	Propylene
799	Ethanol	915	Styrene
870	Ethylbenzene	932	Trichloroethane
965	Ethyl chloride	997	Toluene
775	Ethylene dichloride	488	Turpentine
775	Ethylene glycol	800	Vinyl Acetate
1,076	Hydrogen	924	Xylene
1,000	Hydrogen cyanide		
500	Hydrogen sulfide		

Source : METAL FINISHING NOVEMBER 1996

13-52


Design Considerations

- Residence time
- Amount of fuel required to reach the *required temperature* for complete combustion
- Proper flow velocity through the unit
 - Flow velocities of 20 to 40 ft./sec. (to promote turbulent mixing)
- VOCs should be less than 25% LEL

13-53

Combustion Products and Gas Volumes

- In all high temperature combustion processes, a complex set chemical reactions occur simultaneously
- Objective is to oxidize all carbon to CO₂, hydrogen to H₂O, and sulfur to SO₂
- Represent the set of simultaneous reactions by the single generalized reaction



13-54

Minor Components in Waste Gas

- Sulfur
 - ≥ 98% converted to SO₂
 - Small amount of SO₃ may be formed
- Chlorine –converted to HCl
- Fluorine –converted to HF
- Nitrogen (in waste gas) –may be converted to N₂, NO, or NO₂
- Cl, F, N (in waste gas) normally neglected in material balance calculations

13-55

Composition of Air

- Oxygen is almost always supplied by air
- Air composition: 21% O₂
 79% N₂
- Neglect minor components in material balance calculations
- For Air: $x = \frac{0.79 \text{ moles of } N_2}{0.21 \text{ moles of } O_2}$
 X = mole fraction of air = volume fraction of air
 N₁/N₂ = V₁/V₂ (at constant T & P – from PV=NRT)

13-56

Combustion Air Requirements

- To achieve complete combustion of the fuel (e.g., natural gas, propane, No. 2 oil), a sufficient supply of oxygen must be present in the burner flame to convert all of the carbon to CO₂. This quantity of oxygen is referred to as the ***stoichiometric (or theoretical) amount***.
- For example, 1 mole of methane (the major component of natural gas) requires 2 moles of oxygen for complete combustion

CH₄ + 2O₂ → CO₂ + 2H₂O


13-57

Lean and Rich

- *Rich* - there is **insufficient O_2 available** for complete oxidation.
 - This reduces the peak flame temperature and results in the formation of CO and other partially-oxidized compounds
- *Lean* - the amount of **O_2 exceeds the amount required** for complete oxidation.
 - The excess air (un-reacted oxygen and nitrogen) will carry away a portion of the heat released by the combustion reactions, and therefore reduce the peak flame temperature.
- Normal operation –10% to 30% excess air

13-58

NOx and CO Emissions vs. Excess Air

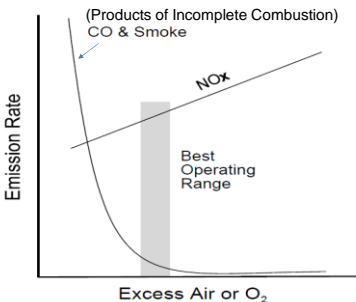

The reason that NOx increases with excess air is that as we increase excess air, large amount of nitrogen enters with the combustion air and more of the combustion is occurring in a region with extra oxygen.

13-59

Example Problem 6-1

- Emissions from a paint baking oven are controlled by a thermal oxidizer. The cylindrical unit has a diameter of 5 feet and a length of 12 feet, with all combustion air supplied by an auxiliary source.
- The exhaust from the oven is 8,000 SCFM. The oxidizer uses 300 SCFM of natural gas and operates at a temperature of 1,400°F.
- What is the residence time in the combustion chamber? Assume that the fuel is 100% methane, and that the burner is operated at 125% of the stoichiometric requirement.

13-60

Solution (continued)

- Step 4. Calculate the total flue gas flow rate Q(out)

$Q(\text{out})=Q(\text{in})+Q(\text{products of combustion})+Q(\text{N}_2)+Q(\text{excessO}_2)$

$Q(\text{in}) = 8,000 \text{ SCFM}$

$Q(\text{products of combustion}) = Q(\text{CO}_2) + Q(\text{H}_2\text{O})$

$$\text{CO}_2 = 1 \frac{\text{lb mol CO}_2}{\text{lb mol CH}_4} \left(0.778 \frac{\text{lb mol CH}_4}{\text{min}} \right) = 0.778 \text{ lb mol CO}_2/\text{min}$$

$$\text{H}_2\text{O} = 2 \frac{\text{lb mol H}_2\text{O}}{\text{lb mol CH}_4} \left(0.778 \frac{\text{lb mol CH}_4}{\text{min}} \right) = 1.56 \text{ lb mol H}_2\text{O}/\text{min}$$

$$\text{CO}_2 + \text{H}_2\text{O} = 2.34 \text{ lb mol/min}$$

$$2.34 \frac{\text{lb mol}}{\text{min}} \left(\frac{385.4 \text{ SCF}}{\text{lb mol}} \right) = 902 \text{ SCFM} = Q(\text{products of combustion})$$

13-64

Solution (continued)

- Calculate the nitrogen and excess air in the flue gas exhaust = Q(N₂)+Q(excessO₂)

Amount of O₂ consumed = stoichiometric req'd = 1.56 lb mol/min

Amount of oxygen remaining = total - consumed
= 1.95 lb mol/min - 1.56 lb mol/min
= **0.39 lb mol/min**

Amount of Nitrogen and excess oxygen

= 7.34 lb mol N/min + 0.39 lb mol O/min = 7.73 lb mol/min

$$7.73 \frac{\text{lb mol}}{\text{min}} \left(\frac{385.4 \text{ SCF}}{\text{lb mol}} \right) = 2,979 \text{ SCFM}$$

Total flue gas flow rate = 8,000 SCFM + 902 SCFM + 2,979 SCFM
= **11,881 SCFM**

13-65

Solution (continued)

- Step 5. Convert the flue gas flow rate to actual conditions

$- Q \text{ ACFM} = 11,881 \text{ SCFM} \left(\frac{1400+460^{\circ}R}{527.7^{\circ}R} \right) = 41,877 \text{ ACFM}$

- Step 6. Calculate volume of combustion chamber

$- \text{Chamber volume} = (\pi)R^2 L = 3.14(2.5\text{ft})^2 (12\text{ft}) = 235.5 \text{ ft}^3$

- Step 7. Calculate residence time

$$= \frac{\text{chamber volume}}{\text{volumetric flow rate}} = \frac{235.5 \text{ ft}^3}{41,877 \text{ ACF/min}} = 0.00562 \text{ minutes}$$

$$= 0.00562 \text{ min} \left(\frac{60 \text{ sec}}{\text{min}} \right) = 0.337 \text{ seconds}$$

13-66

Carbon Adsorption

13-67

Activated Carbon


- A class of materials
- Produced from coal, wood, nut shells and petroleum-based products
- Activation process
 - Heat material to ~1,100°F without oxygen
 - Use steam, air or CO₂ to increase pore structure


13-68

Types of Adsorption Processes

- Chemical adsorption
- Physical adsorption

13-69

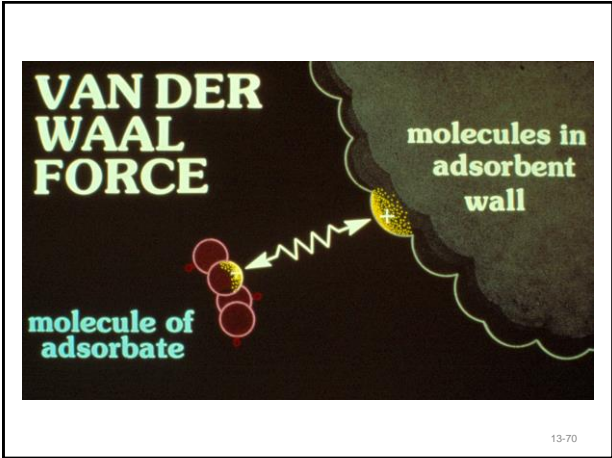


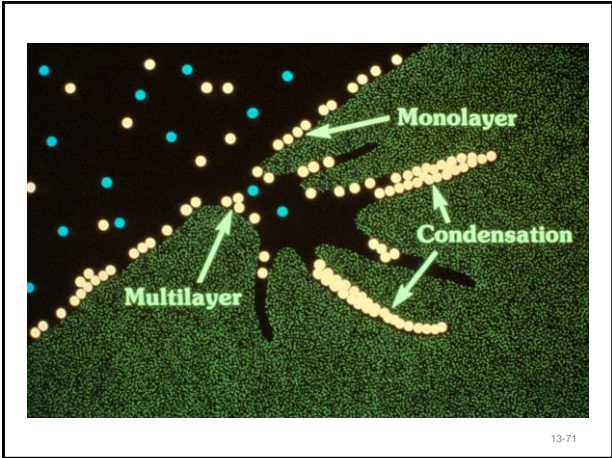



Adsorption Capacity


- Retention
- Lbs of VOC adsorbed per 100 lbs of carbon
- Weight percent


13-72

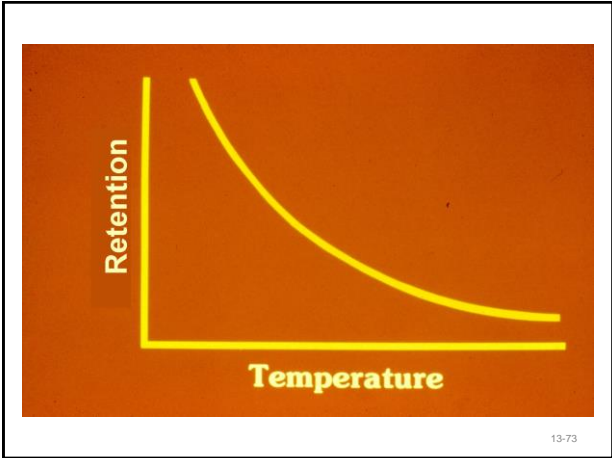


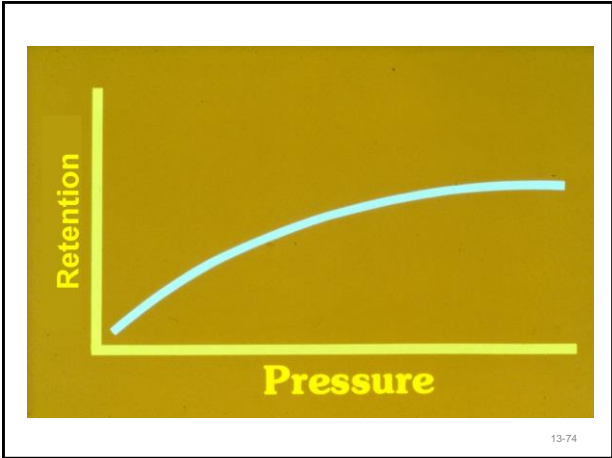

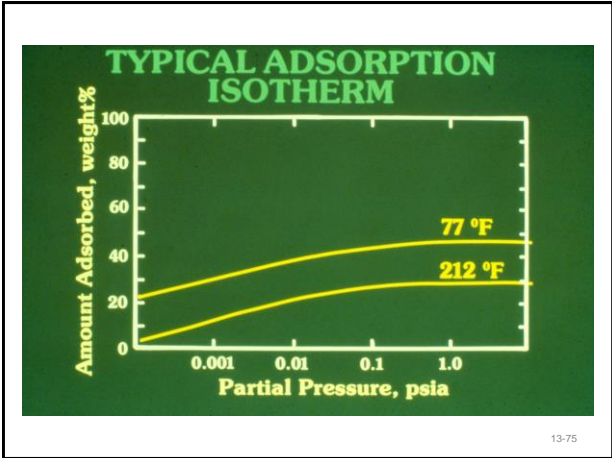

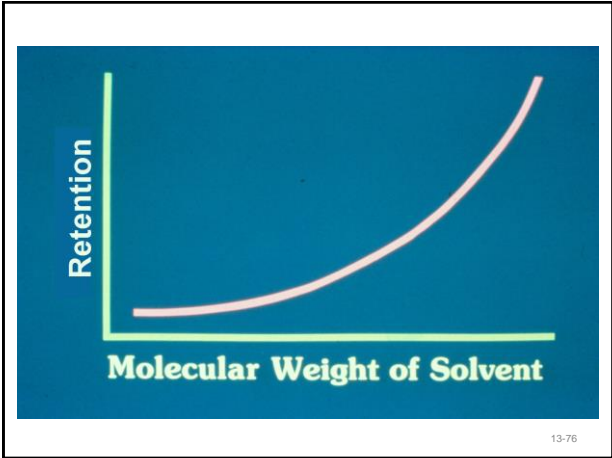

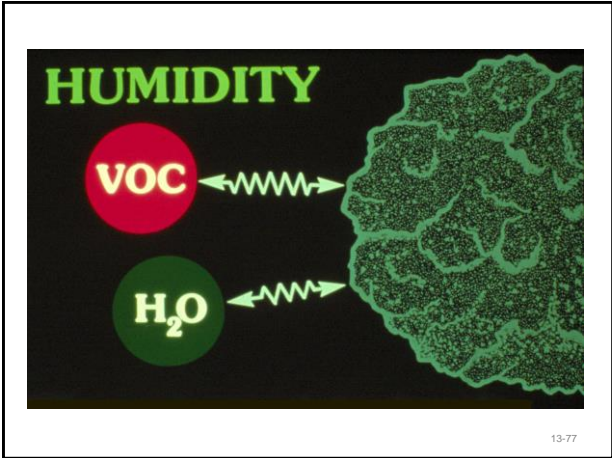

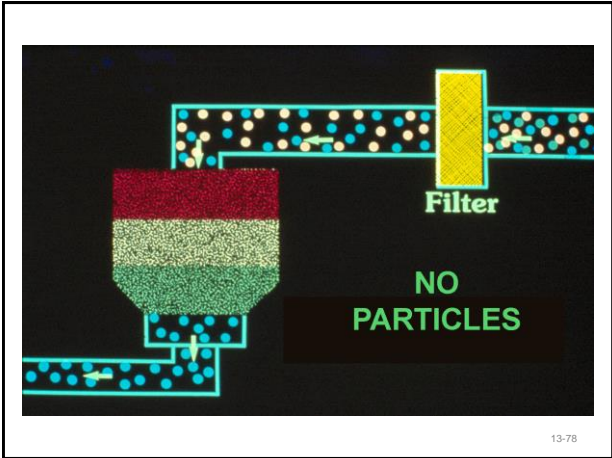


Types of Adsorption Systems

- On-site regeneration
- Off-site regeneration


13-79

Off-Site Regeneration Adsorbers

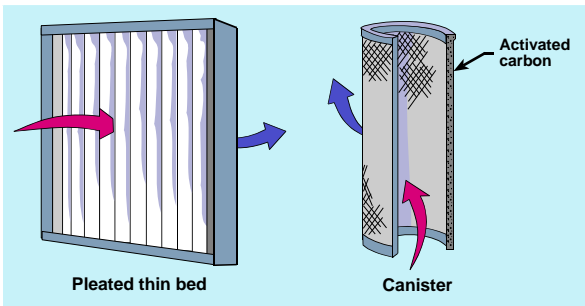


13-80

Canister Adsorber




13-81

On-Site Regeneration
Fixed-Bed System

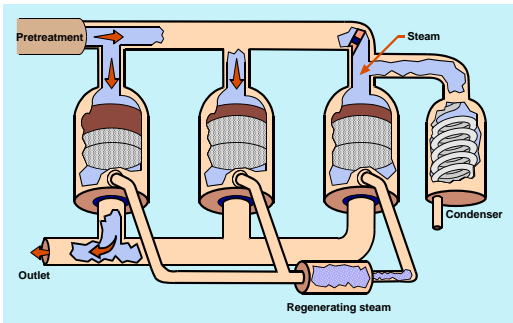

13-82

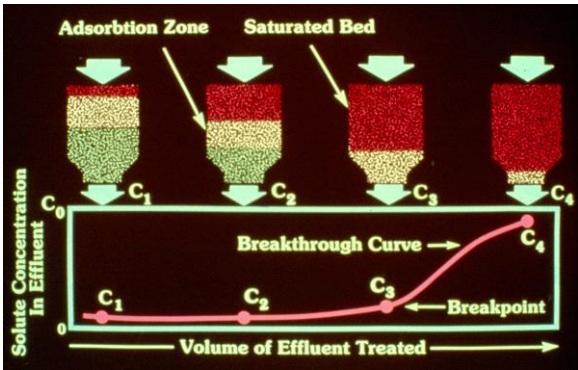


13-83

Regeneration Methods

- Thermal swing
 - Steam
 - Hot gas
- Pressure swing

13-84

Steam Regeneration

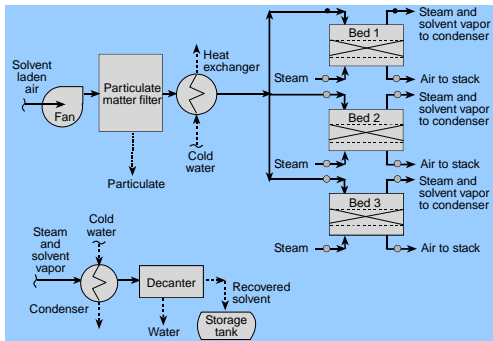


13-85

Regeneration Methods

- Thermal swing
 - Steam
 - Hot gas
- Pressure swing

13-86

Hot Gas Regeneration

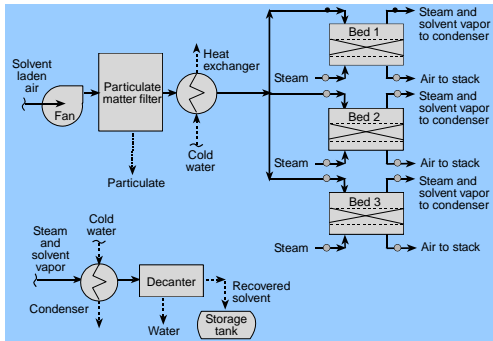


13-87

Other Adsorber Designs


13-88

Carbon Fiber Adsorber

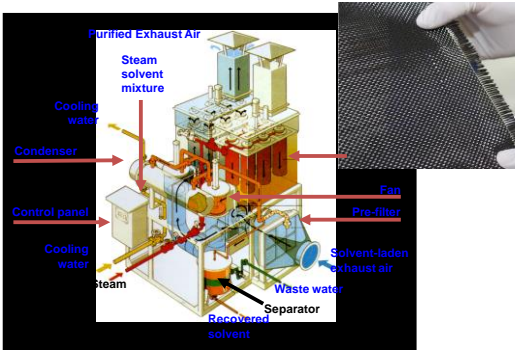



13-89

Rotary Bed Adsorber

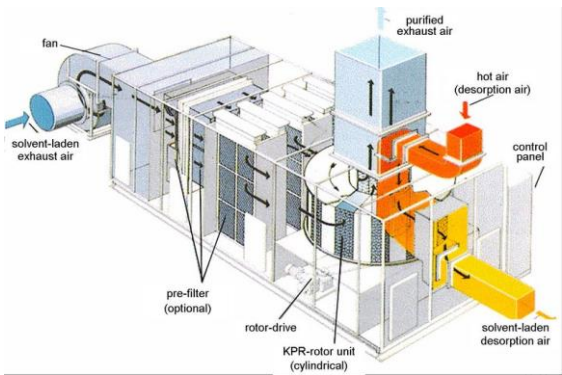

13-90

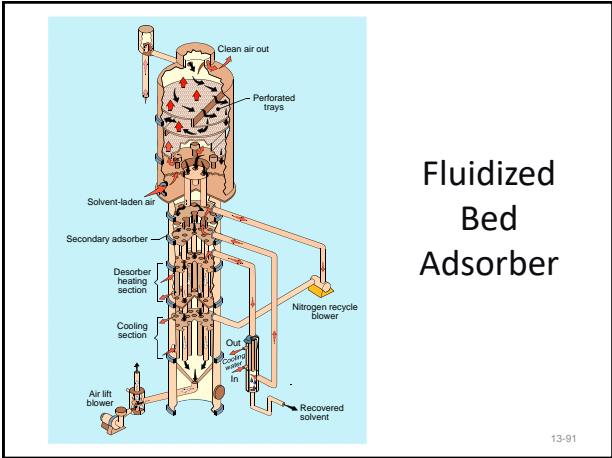

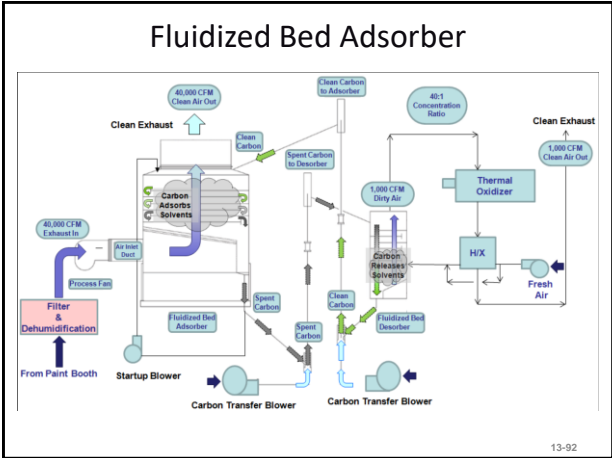



Condensation


- Conventional systems
- Refrigeration systems
- Cryogenic systems

13-94

Types of Condensers

- Direct contact condensers
- Surface condensers


13-95

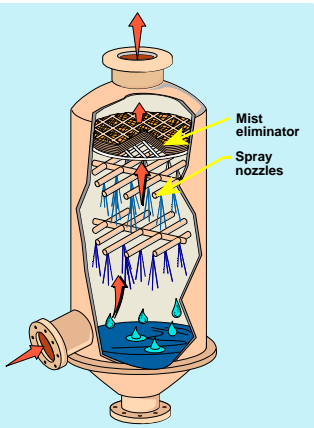

Direct
Contact
Condenser


13-96

Ejector Condenser

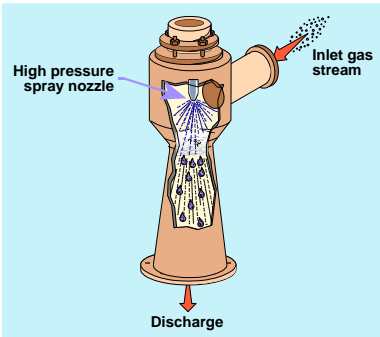


13-97

Shell and Tube Condenser

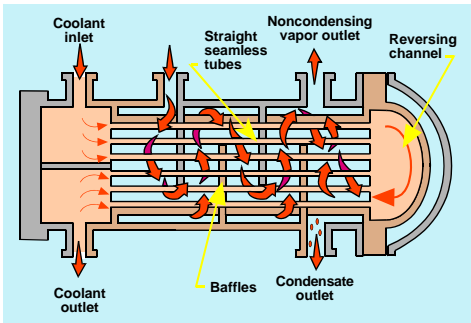


13-98

Tube and Fin Condenser

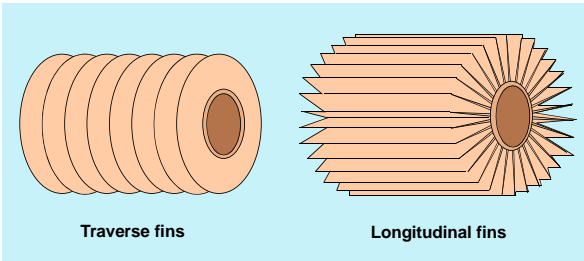


13-99

Refrigeration Cycle

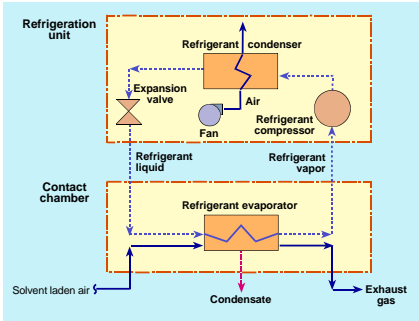


13-100

Refrigeration System

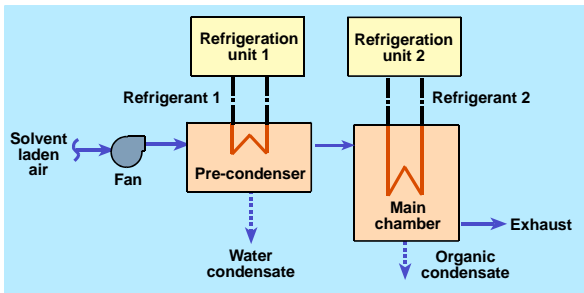

13-101

Dual Heat Exchanger Cryogenic System

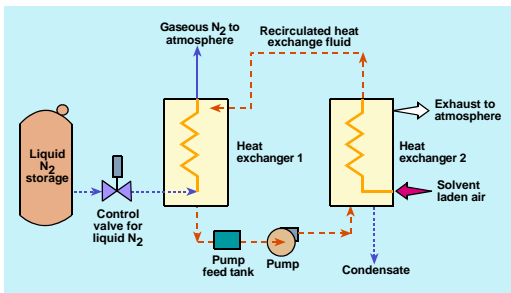


13-102

Bioreaction Controls

- Biofilters
- Biotrickling filters
- Bioscrubbers

13-103

Basic Biofilter

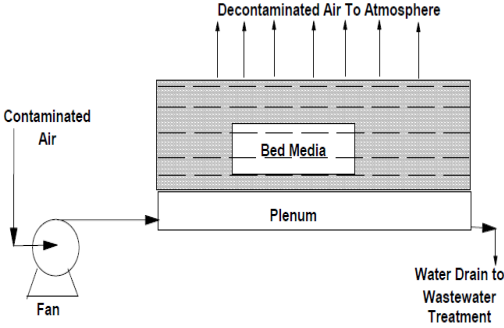


12 - 104

Microbial Population Requirements

- Sufficient moisture
- Sufficient nutrients
- Temperature of 60°F to 85°F
- pH of 6 to 8


13-105

Biofilter System

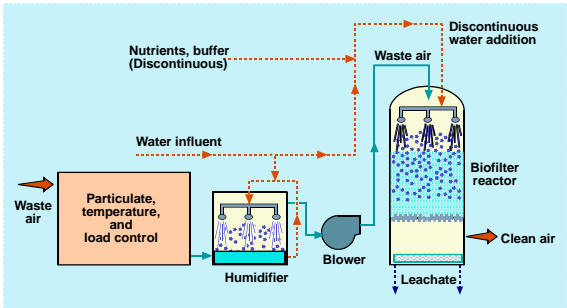


13-106

Biotrickling Filter System

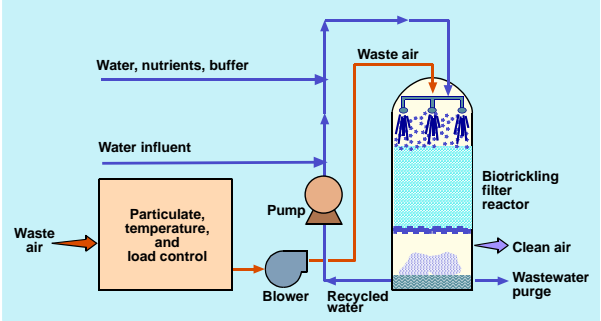

13-107

Bioscrubber System

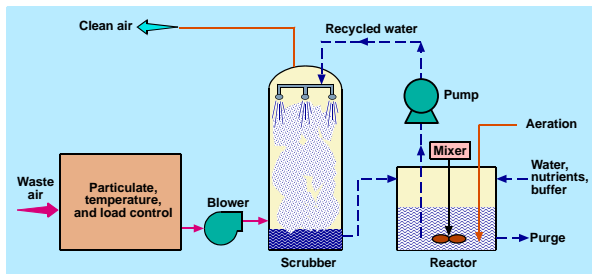

13-108

Table 1. Typical biofilter performance data.				
Application (Reference)	Contaminant(s)	Loading	Removal	Biofilter Type
Yeast Production Facility (1)	Ethanol, Aldehydes	35,000 cfm/500 yd ³ media, 1 g/m ³	Overall VOC reduction of 95%	Media filter
Plastics Plant VOC Emissions Control (1)	Toluene, Phenol, Acetone	1,000 m ³ /h	80%–95%	Media filter
Pharmaceutical Production (2)	Organic carbon	1,000 m ³ /h, 2,050 mg/m ³ (5,800 mg/m ³ peak)	>98% first stage, >95.9% overall	Media filter (two-stage)
Artificial Glass Production (3)	Monomer methyl methacrylate (MMA), Dichloromethane (DCM)	125–150 m ³ /h, 50–250 mg/m ³	Biofilter: 100% MMA, 20% DCM, BTF: 95% DCM	Media filter plus biotrickling filter (BTF) in series
Hydrocarbon Emissions Control (1)	Hydrocarbon solvents	140,000 m ³ /h, 500 mg/m ³	95%	Media filter
Compost Plant for Garbage (4)	Odor	16,000 m ³ /h, 284 m ² (1 m deep) 60 m ³ m/d, 230 mg C/m ³	>95%	Media filter
Gasoline VOCs Emissions Control (Pilot Scale) (5)	Total VOCs	16 g/m ³ h	90%	Media filter
Hydrogen Sulfide Emissions Control (Laboratory Scale) (6)	H ₂ S	1.9–2.6 mg/kg-min (25–265 ppmv)	93%–100%	Media filter
Styrene Removal (Bench Scale) (7)	Styrene	Up to 22 g/m ³ h, 0.5 min retention time	>99%	Biotrickling filter
Styrene Removal (Bench Scale) (7)	Styrene	Up to 100 g/m ³ h	>95%	Media filter (peat)
Rendering Plant (8)	Odor	1,100 m ³ /h (650 cfm), 420 m ² (4,500 ft ²)	99.9%	Media filter
Fuel-Derived VOC Emissions Control (9)	Nonmethane organic carbon (simulated jet fuel)	500 ppb-cfm/ft ² , 500–1,500 ppb-cfm/ft ²	>95%, 30%–70%	Media filter

From Biofiltration- a Primer Chemical Engineering Progress April 2001

US EPA Bioreactor Publication

“USING BIOREACTORS TO CONTROL AIR POLLUTION” EPA-456/R-03-003

<http://www.epa.gov/ttn/catc/dir1/fbiorect.pdf>

VOC Control

REDUCE VOC AND HAP EMISSIONS

EDWARD C. MURPHY, BAKER ENVIRONMENTAL, INC.

Over the past decade, numerous scientific, political, social, and economic changes have improved air quality and environmental protection. One result is new tools for controlling air pollution, a compound (VOC) and hazardous air pollutants (HAP) emissions. Some of the significant changes that have been made include:

- The implementation of the 1990 Clean Air Act Amendments (CAAA) by the U.S. Environmental Protection Agency (EPA) to reduce VOC emissions from the major sources of air pollution.
- Increased public interest in the environment through education, access to radio-television, and other media.
- The emergence of regional air quality management programs to reduce pollution from various sources, such as transportation, industry, and agriculture.
- The implementation of the 1990 CAA Amendments by the U.S. Environmental Protection Agency (EPA) to reduce VOC emissions from the major sources of air pollution.
- Increased public interest in the environment through education, access to radio-television, and other media.
- The emergence of regional air quality management programs to reduce pollution from various sources, such as transportation, industry, and agriculture.

Follow this roadmap to understand the current technologies available for controlling emissions of volatile organic compounds and hazardous air pollutants and the criteria for choosing among them.

bioactive-based approach that processes pollution prevention over end-of-pipe control.

The emergence of international agreements to reduce emissions of volatile organic compounds, hazardous air pollutants, and other VOC and HAP control technologies. It is supported from the local, chemical industry, and international levels. The book includes information on the design, development, and operation of bioactive-based systems for the control of VOC and HAP emissions. The book also includes information on EPA's current technology programs, including the National Volatile Organic Compound Elimination Program (NVEP).

Thermal oxidation, or incineration, is the process of oxidizing combustible materials to reduce the concentration of the pollutants. This process is often used for the control of VOC and HAP emissions. The book also includes information on the design, development, and operation of thermal oxidation systems.

Chemical Engineering Progress Magazine June 2002
<https://www.aiche.org/resources/publications/cep/2002/june/reduce-voc-and-hap-emissions>